

! Contact our sales office for delivery dates and prices as this is a special model.

Specialized Product

Point to Group  
**P.G.** information

# Air Slide Table: Long Stroke 200 mm Specification *MXS20-200, MXS25-200*

Features

A 200 mm stroke has been added to  $\varnothing 20$  and  $\varnothing 25$  sizes.

	Stroke [mm]									
	10	20	30	40	50	75	100	125	150	200
<b>MXS20</b>	○	○	○	○	○	○	○	○	○	●
<b>MXS25</b>	○	○	○	○	○	○	○	○	○	●

○: Standard stroke ●: Added stroke



## Specifications:

Same as the standard product

Weight  $\varnothing 20$ : 3.4 kg


$\varnothing 25$ : 5.6 kg

## Allowable Values

Model		MXS20	MXS25
Maximum allowable load mass: Wmax [kg]		6	9
Maximum allowable moment: Mmax [N·m]		50.5	67.3
Maximum allowable kinetic energy: Emax [J]	Rubber bumper	0.16	0.24
	Shock absorber	0.32	0.48

\* For model selection procedures, refer to the MXS series in the **Web Catalog**.

## How to Order

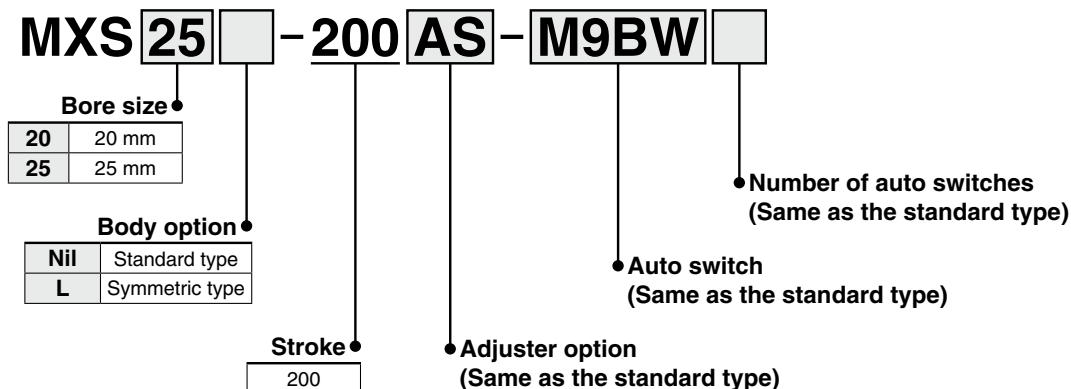

\* Functional options and the port thread type (TN and TF specifications) are not available.



**Caution**

To ensure the safest possible operation of this product, please be sure to thoroughly read the "Safety Instructions" in our "Best Pneumatics" catalog before use.

**SMC Corporation** 4-14-1, SOTO-KANDA, CHIYODA-KU, TOKYO 101-0021, JAPAN URL: <http://www.smcworld.com>


©2017 SMC Corporation All Rights Reserved



SP173X-002E  
P: VV

**Dimensions: MXS20 (Standard Type)**


**MXS20-200**

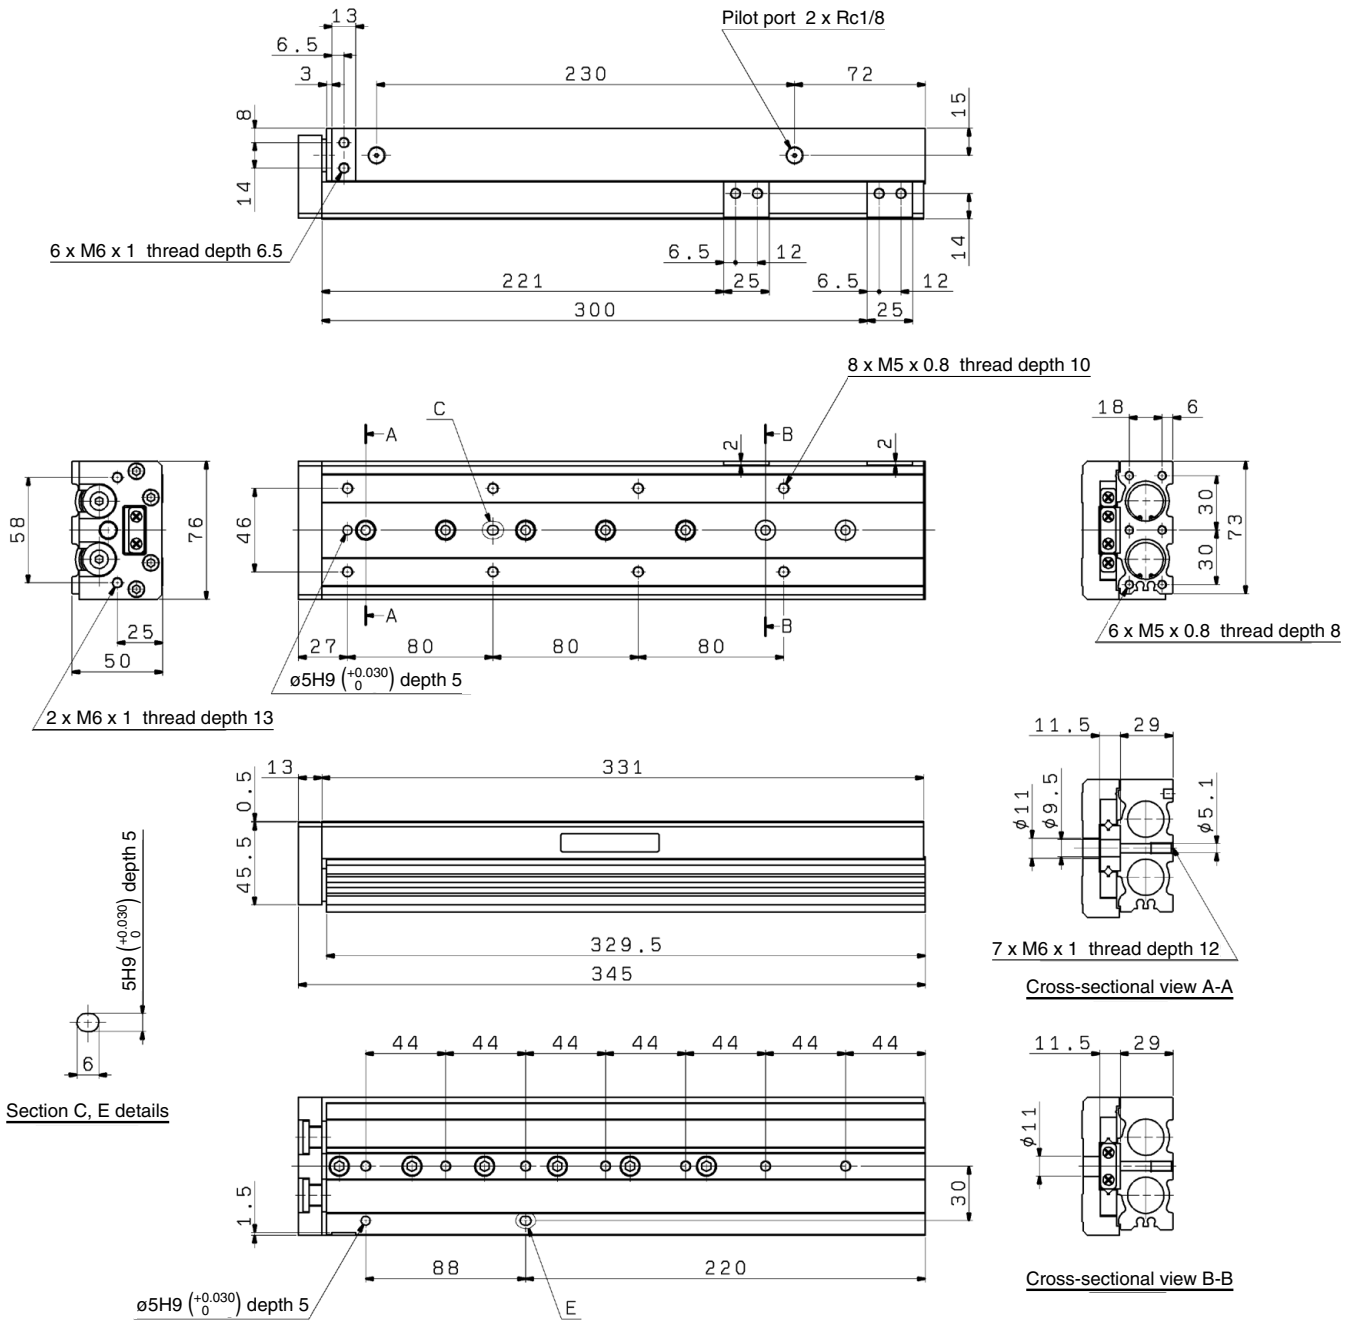

## Dimensions: MXS20L (Symmetric Type)

### MXS20L-200



\* Dimensions other than those shown below are the same as the standard type.

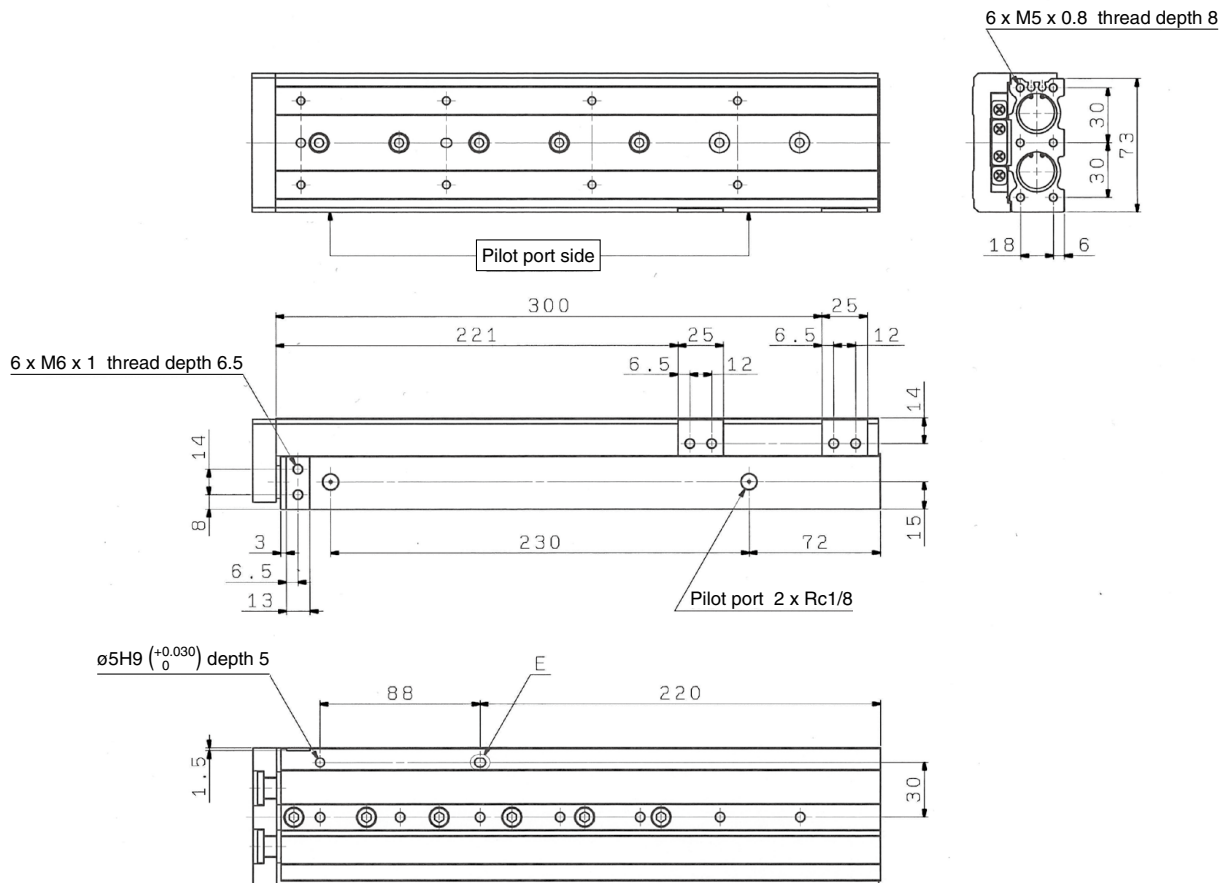

## Adjuster Option ( $\phi 20$ )

MXS20-□□AS, AT, A

With shock absorber MXS20-□□BS, BT, B

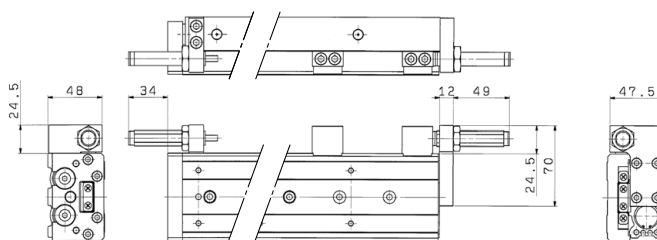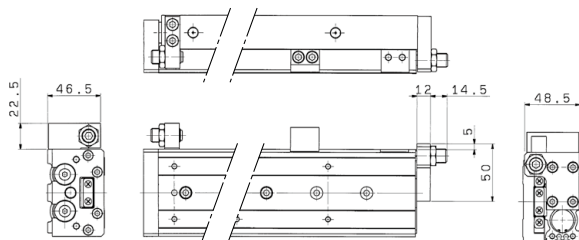

### Stroke Adjustment Range [mm]

Extension end	Retraction end
0 to 5	

### Stroke Adjustment Range [mm]

Extension end	Retraction end
0 to 40	0 to 35

**Dimensions: MXS25 (Standard Type)**

**MXS25-200**

