

5 Port Solenoid Valve

SY3000/5000/7000/9000 Series

Rubber Seal

The SS5Y3/5-45T/T1□ type plug-in terminal block manifold is to be discontinued as of December 2019. Therefore, we recommend considering the SY3000/5000/7000 plug-in connector connecting base terminal block box type manifold as a substitute. ([Click here](#) for details.) However, keep in mind that there is no specification or mounting compatibility between the two products.

CE cFUS
 [Option] (30-SY → From page 630)

SJ
 SY
 SY
 S0700
 S0700

Power Consumption
0.1W*
 With Power Saving Circuit

* For details, refer to page 636.



• **Flow Rate Characteristics**

| Series | Flow rate characteristics | | |
|--------|------------------------------|------|------|
| | C [dm ³ /(s·bar)] | b | Cv |
| SY3000 | 1.1 | 0.28 | 0.29 |
| SY5000 | 2.8 | 0.37 | 0.90 |
| SY7000 | 4.5 | 0.28 | 1.4 |
| SY9000 | 10 | 0.29 | 2.5 |


• **Long service life**

* Please contact SMC if life test data is required.


Cylinder Speed Chart

Use as a guide for selection.
Please confirm the actual conditions with SMC Sizing Program.

Body Ported

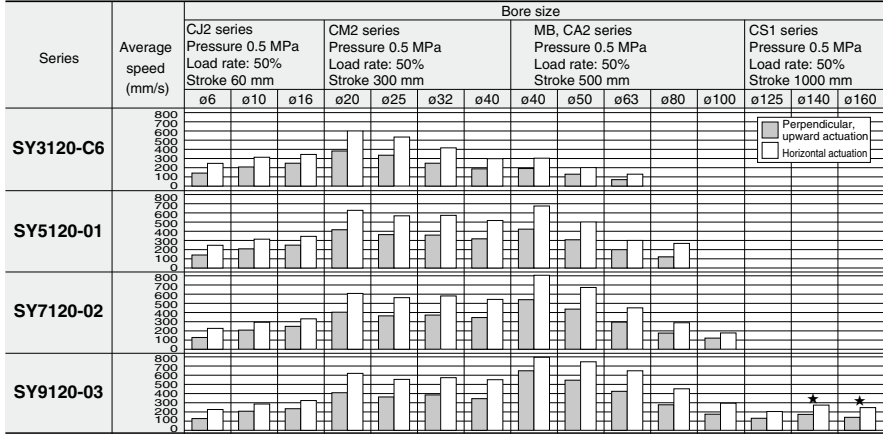

Base Mounted

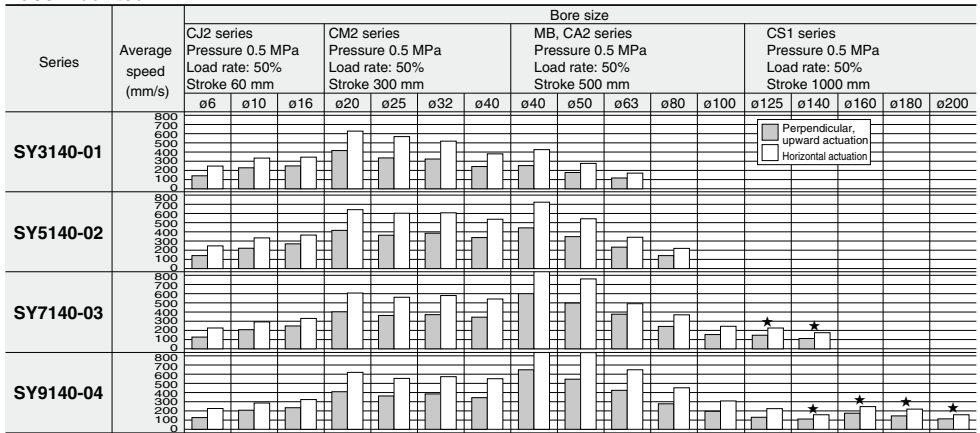

* Cylinder is in extending. Speed controller is meter-out, which is directly connected with cylinder and its needle is fully opened.
* Average speed of cylinder is obtained by dividing the full stroke time by the stroke.
* Load factor: (Load mass x 9.8) / (Theoretical force) x 100%
* The histograms with ★ marked are the case when piping is done by using steel.

Conditions

| Body ported | CJ2 series | CM2 series | MB, CA2 series | CS1 series |
|-------------|---|---------------------------|---------------------------|------------|
| SY3120-C6 | Tubing bore x Length T0604 x 1 m Speed controller AS2052F-06 Silencer AN120-M5 | T0806 x 1 m AS3002F-08 | - | - |
| SY5120-01 | T0604 x 1 m AS3002F-06 | T0806 x 1 m AS3002F-08 | - | - |
| SY7120-02 | T0604 x 1 m AS3002F-06 | T1075 x 1 m AS4002F-10 | - | - |
| SY9120-03 | T0604 x 1 m AS3002F-06 | T1075 x 1 m AS4002F-12 | T1209 x 1 m AS4002F-12 | - |
| | Silencer AN20-02 | AN20-02 | AN20-02 | AN20-02 |

Conditions

| Base mounted | CJ2 series | CM2 series | MB, CA2 series | CS1 series |
|--------------|---|---------------------------|---------------------------|------------|
| SY3140-01 | Tubing bore x Length T0604 x 1 m Speed controller AS3002F-06 Silencer AN110-01 | T0806 x 1 m AS3002F-08 | - | - |
| SY5140-02 | T0604 x 1 m AS3002F-06 | T0806 x 1 m AS3002F-08 | - | - |
| SY7140-03 | T0604 x 1 m AS3002F-06 | T1075 x 1 m AS4002F-10 | T1209 x 1 m AS4002F-12 | - |
| SY9140-04 | T0604 x 1 m AS3002F-06 | T1075 x 1 m AS4002F-12 | T1209 x 1 m AS4002F-12 | - |
| | Silencer AN20-02 | AN20-02 | AN20-02 | AN20-02 |



Conditions [When using SGP (steel pipe)]

| Body ported | CS1 series |
|-------------|---|
| SY9120-03 | Tubing bore x Length SGP10A x 1 m Speed controller AS420-03 Silencer AN20-02 |

Conditions [When using SGP (steel pipe)]

| Base mounted | CS1 series |
|--------------|---|
| SY7140-03 | Tubing bore x Length SGP10A x 1 m Speed controller AS420-03 Silencer AN30-03 |
| SY9140-04 | Tubing bore x Length SGP15A x 1 m Speed controller AS420-04 Silencer AN40-04 |

Valve Variations







| | Series | Sonic conductance C [dm ³ /(s·bar)] { 4/2→5/3 (A/B→EA/EB)} | Actuation | | | | | Voltage | | Electrical entry | | | | Light/surge voltage suppressor <small>(Note 1)</small> | |
|--------------|--|--|------------|--------|---------------|----------------|-----------------|---|--|------------------|------------------|------------------|--------------------------------------|--|--------------|
| | | | 2 position | | 3 position | | | DC 24 V 12 V 6 V 5 V 3 V | AC 100 V 50/60 Hz 110 V 50/60 Hz 200 V 50/60 Hz 220 V 50/60 Hz | Grommet | L plug connector | M plug connector | DIN terminal <small>(Note 4)</small> | | M8 connector |
| | | | Single | Double | Closed center | Exhaust center | Pressure center | | | | | | | | |
| Body ported | P.404  | SY3 □ 20 | 0.65 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | | SY5 □ 20 | 2.4 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | SY7 □ 20 | 3.3 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | SY9 □ 20 | 8.6 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Base mounted | P.420  | SY3 □ 40 | 1.1 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| | | SY5 □ 40 | 2.8 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | SY7 □ 40 | 4.5 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | | SY9 □ 40 | 10 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

SJ
SY
SY
S0700
S0700

| | Series | Manual override | | | | P, EA, EB port size | | | | A, B port size | | | | | | | | Valve option | | | | | | | | | | |
|--------------|----------|-----------------------|-------------------------------|-----------------------------|---------|---------------------|-----|-----|-----|----------------|-----|-----|-----|-----|-------------------|----|----|--------------|-----|------------------|---|-----------------------|-----------------------------|---------------|--|---------------------|-----------------|----|
| | | Non-locking push type | Push-tum locking slotted type | Push-tum locking lever type | Bracket | M5 | 1/8 | 3/8 | 1/2 | M5 | 1/8 | 1/4 | 3/8 | 1/2 | One-touch fitting | | | | | Exhaust throttle | Or resistant (Other than designated tubing oil) | Vacuum specifications | Low pressure specifications | Dual pressure | Enclosure IP65 <small>(Note 3)</small> | Interface regulator | 3 Port valve SY | |
| | | | | | | | | | | | | | | | C4 | C6 | C8 | C10 | C12 | | | | | | | | | N3 |
| Body ported | SY3 □ 20 | ● | ● | ● | ● | | | | ● | | | | | | ● | ● | | | | | | | | | | | | ● |
| | SY5 □ 20 | ● | ● | ● | ● | | ● | | ● | | | | | | ● | ● | | | | | | | | | | | | ● |
| | SY7 □ 20 | ● | ● | ● | ● | | ● | ● | | ● | | | | | ● | ● | | | | | | ● | ▲ | ▲ | ▲ | ▲ | | ● |
| | SY9 □ 20 | ● | ● | ● | | | ● | ● | | ● | ● | | | | ● | ● | | | | | | | | | | | | ● |
| Base mounted | SY3 □ 40 | ● | ● | ● | | ● | | | ● | | | | | | | | | | | | | | | | | | ● | |
| | SY5 □ 40 | ● | ● | ● | | | ● | | ● | | | | | | | | | | | | | | | | | | ● | |
| | SY7 □ 40 | ● | ● | ● | | | ● | ● | | ● | ● | | | | | | | | | | | | | | | | ● | |
| | SY9 □ 40 | ● | ● | ● | | | ● | ● | | ● | ● | | | | | | | | | | | | | | | | ● | |

● Standard ● Option ▲ Made to order (Refer to page "Made to Order")
 Note 1) All AC voltage models have built-in surge voltage suppressor.
 Note 2) Body ported external pilot type (made to order) is not available for DIN terminal.
 Note 3) Only available for DIN terminal and M8 connector.
 Note 4) SY3000 does not have a DIN terminal which can be connected to a manifold.














Manifold Variations

| Manifold Variations | | | | Valve Series | Wiring | | | | | | | | |
|--|--|---|----------------------------|--------------|-------------------|-----------------------------|---|--|--|--|--------------------------|-----------------------|-----------------|
| | | | | | Connection | | | | | | | Common specifications | |
| | | | | | Individual wiring | Flat ribbon cable (26 pins) | Flat ribbon cable (20 pins) connector box | Plug-in type D-sub connector (25 pins) | Plug-in type flat ribbon cable (26, 20, 10 pins) | Plug-in type terminal block (9, 18 pins) | Serial transmission unit | Positive common | Negative common |
| Body ported | Bar stock type Individual wiring ■ Direct piping to the main unit of a valve. Combination of different fittings is possible. |  | Type 20 P. 438 | SY3□20 | ● | — | — | — | — | — | — | — | — |
| | | | SY5□20 | — | ● | — | — | — | — | — | — | — | |
| | | | SY7□20 | — | — | — | — | — | — | — | — | | |
| | Bar stock type Flat ribbon cable ■ A 26 pins MIL connector permits One-touch wiring of external cables in a bundle. |  | Type 20P P. 448 | SY3□20 | — | ● | — | — | — | — | — | — | ● (Note) |
| | | | SY5□20 | — | ● | — | — | — | — | — | — | ● (Note) | |
| | | | SY7□20 | — | — | — | — | — | — | — | — | ● (Note) | |
| | Stacking type Individual wiring ■ Manifold stations can be increased or decreased. |  | Type 23 P. 444 | SY9□20 | ● | — | — | — | — | — | — | — | — |
| | | | Type 23P P. 454 | SY9□20 | — | ● | — | — | — | — | — | — | — |
| | Bar stock type EX510 gateway type ■ Can be used with a serial transmission system. |  | Type 20SA P. 458 | SY3□20 | — | — | — | — | — | — | ● | — | — |
| | | | SY5□20 | — | — | — | — | — | — | — | ● | — | — |
| | | | SY7□20 | — | — | — | — | — | — | — | — | — | — |
| | Stacking type EX510 gateway type ■ Can be used with a serial transmission system. |  | Type 23SA P. 464 | SY9□20 | — | — | — | — | — | — | ● | — | — |
| Cassette type Individual wiring ■ Size and weight reduced by eliminating the manifold base |  | Type 60 P. 472 | SY3□60 | ● | — | — | — | — | — | — | — | — | |
| | | SY5□60 | ● | — | — | — | — | — | — | — | — | — | |
| | | SY7□60 | ● | — | — | — | — | — | — | — | — | — | |

● Standard ● Option ▲ Made to order (Refer to page "Made to Order".)

Note) When there are polarities, the positive common specifications are used.

Manifold Variations

| Manifold Variations | | Valve Series | Wiring | | | | | | | | | | |
|---------------------|--|--|---|-----------------------------|---|--|--|--|--------------------------|-----------------------|-----------------|-------------------------|---|
| | | | Connection | | | | | | | Common specifications | | | |
| | | | Individual wiring | Flat ribbon cable (26 pins) | Flat ribbon cable (20 pins) connector box | Plug-in type D-sub connector (25 pins) | Plug-in type flat ribbon cable (26, 20, 10 pins) | Plug-in type terminal block (9, 18 pins) | Serial transmission unit | Positive common | Negative common | | |
| Base mounted | Compact bar stock type Individual wiring ■ The base mounting facilitates maintenance after valves are changed. |  Type 41 P. 490 | SY3□40 SY5□40 | ● | — | — | — | — | — | — | — | — | |
| | Compact bar stock type Flat ribbon cable ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle. |  Type 41P P. 506 | SY3□40 SY5□40 | — | ● | — | — | — | — | — | — | ● Note) In common | — |
| | Bar stock type/Common external EXH Individual wiring ■ The base mounting facilitates maintenance after valves are changed. ■ Vacuum/low pressure combination system is possible. |  Type 42 P. 490 | SY3□40 SY5□40 SY7□40 | ● | — | — | — | — | — | — | — | — | — |
| | Bar stock type/Common external EXH Flat ribbon cable ■ A 26 pins MIL connector permits one-touch wiring of external cables in a bundle. ■ Vacuum/low pressure combination system is possible. |  Type 42P P. 506 | SY3□40 SY5□40 SY7□40 | — | ● | — | — | — | — | — | — | ● Note) In common | — |
| | Stacking type Individual wiring ■ Manifold stations can be increased or decreased. |  Type 43 P. 500 | SY9□40 | ● | — | — | — | — | — | — | — | — | — |
| | Stacking type Flat ribbon cable ■ Manifold stations can be increased or decreased. |  Type 43P P. 514 | SY9□40 | — | ● | — | — | — | — | — | — | ● Note) In common | — |
| | Bar stock type EX510 gateway type ■ Can be used with a serial transmission system. |  Type 42SA P. 520 | SY3□40 SY5□40 SY7□40 | — | — | — | — | — | — | ● | — | — | — |
| | Stacking type EX510 gateway type ■ Can be used with a serial transmission system. |  Type 43SA P. 525 | SY9□40 | — | — | — | — | — | — | ● | — | — | — |
| | Stacking type/DIN rail mounted Individual wiring ■ Stations can be increased on the DIN rail. Integrated mounting of other electric parts is possible, too. |  Type 45 P. 536 | SY3□40 SY5□40 | ● | — | — | — | — | — | — | — | — | — |
| | Stacking type/DIN rail mounted Connector box ■ Stations can be increased or decreased on the DIN rail. The provided connector box permits one-touch connection of electric cables. |  Type 45^A P. 548 | SY3□40 SY5□40 | — | — | ● | — | — | — | — | — | ● | ● |
| | Stacking type/DIN rail mounted EX510 gateway type ■ Can be used with a serial transmission system. |  Type 45S6A P. 556 | SY3□40 SY5□40 | — | — | — | — | — | — | ● | — | — | — |
| | Stacking type/DIN rail mounted Plug-in ■ Stations can be increased or decreased on the DIN rail. ■ A variety of centralized wiring methods are possible. |  Type 45I P. 564 | SY3□40 SY5□40 | — | — | — | ● | ● | ● | ● | ● | ● | ● |
| | Stacking type/DIN rail mounted Plug-in EX510 gateway type ■ Can be used with a serial transmission system. |  Type 45S6B P. 604 | SY3□40 SY5□40 | — | — | — | — | — | — | ● | — | — | — |


● Standard ● Option ▲ Made to order (Refer to page "Made to Order".)
 Note) When there are polarities, the positive common specifications are used.

INDEX

| | |
|----------------------------|-------|
| Cylinder Speed Chart | P.398 |
| Valve Variations | P.399 |
| Manifold Variations | P.400 |


5 Port Solenoid Valve

■ Single Unit



| | |
|--------------------|-------|
| Body Ported | P.404 |
| Base Mounted | P.420 |

■ Body Ported Manifold



| | |
|---|-------|
| Type 20 Bar Stock Type/Individual Wiring | P.438 |
|---|-------|




| | |
|--|-------|
| Type 23 Stacking Type/Individual Wiring | P.444 |
|--|-------|



| | |
|--|-------|
| Type 20P Bar Stock Type/Flat Ribbon Cable | P.448 |
|--|-------|




| | |
|---|-------|
| Type 23P Stacking Type/Flat Ribbon Cable | P.454 |
|---|-------|



| | |
|--|-------|
| Type 20SA Bar Stock Type/EX510 Gateway-type | P.458 |
|--|-------|




| | |
|---|-------|
| Type 23SA Stacking Type/EX510 Gateway-type | P.464 |
|---|-------|



| | |
|--|-------|
| Type 60 Cassette Type/Individual Wiring | P.472 |
|--|-------|

■ Base Mounted Manifold

| | | |
|--|---|-------|
|  | Type 41 Bar Stock Type/Compact Type/Individual Wiring | P.490 |
|  | Type 42 Bar Stock Type/External Pilot Capable/Individual Wiring | P.490 |
|  | Type 43 Stacking Type/Individual Wiring | P.500 |
|  | Type 41P Bar Stock Type/Compact Type/Flat Ribbon Cable | P.506 |
|  | Type 42P Bar Stock Type/External Pilot Capable/Flat Ribbon Cable | P.506 |
|  | Type 43P Stacking Type/Flat Ribbon Cable | P.514 |
|  | Type 42SA Bar Stock Type/EX510 Gateway-type | P.520 |
|  | Type 43SA Stacking Type/EX510 Gateway-type | P.525 |
|  | Type 45 Stacking Type/ DIN Rail Mounted Individual Wiring | P.536 |
|  | Type 45-^A_{NA} Stacking Type/ DIN Rail Mounted Connector Box | P.548 |
|  | Type 45S6A Stacking Type/ DIN Rail Mounted EX510 Gateway-type | P.556 |
|  | Type 45□ Stacking Type/ DIN Rail Mounted Plug-in | P.564 |
|  | Type 45S6B Stacking Type/ DIN Rail Mounted EX510 Gateway-type | P.604 |

| | |
|--|-------|
| Manifold Option | P.609 |
| SY300/500 3 Port Valve: Mixed Mounting Type on Manifold | P.610 |

Made to Order

| | |
|--|-------|
| External Pilot/Built-in Silencer | P.616 |
| Mixed Mounting Type | P.621 |
| M8 Connector Conforming to IEC60947-5-2 | P.623 |
| Body Ported External Pilot/Fluororubber for Main Valve | P.624 |
| Body Ported Vacuum Release Valve with Throttle Valve | P.625 |
| Pilot Valve Assembly/Port Block Assembly | P.629 |

Conforming to UL standard

| | |
|--|-------|
| 30-SY3000/5000/7000/9000: 5 Port Solenoid Valve Body Ported/Single Unit | P.630 |
| 30-SY3000/5000/7000/9000: 5 Port Solenoid Valve Base Mounted/Single Unit | P.631 |
| 30-SY300/500: 3 Port Solenoid Valve Body Ported/Single Unit | P.632 |
| 30-SY300/500: 3 Port Solenoid Valve Base Mounted/Single Unit | P.633 |

| | |
|---|-------|
| Specific Product Precautions | P.635 |
|---|-------|

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

5 Port Solenoid Valve Body Ported/Single Unit



[Option]
Note) AC-type models that are CE-compliant have DIN terminals only.

SY3000/5000/7000/9000 Series

How to Order

SY 5 1 20 - 5 L - 01 - - - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

Type of actuation

| | | |
|---|---|--|
| 1 | 2 position single (A) 4 2 (B) | |
| | (EA) 5 1 3 (EB) (P) | |
| 2 | 2 position double (A) 4 2 (B) | |
| | (EA) 5 1 3 (EB) (P) | |
| 3 | 3 position closed center (A) 4 2 (B) | |
| | (EA) 5 1 3 (EB) (P) | |
| 4 | 3 position exhaust center (A) 4 2 (B) | |
| | (EA) 5 1 3 (EB) (P) | |
| 5 | 3 position pressure center (A) 4 2 (B) | |
| | (EA) 5 1 3 (EB) (P) | |

Note) For details about Symbol of the 3 position type of the SY9000 series, refer to page 407.

Coil specifications

| | Standard |
|---|---|
| T | With power saving circuit (24, 12 VDC only) |

* Power saving circuit is not available in the case of D, DO, Y, YO or W□ type.

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

Rated voltage

| For AC (50/60 Hz) | |
|-------------------|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.
Note) AC-type models that are CE-compliant have DIN terminals only.

Electrical entry

| | 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC | 24, 12 VDC/100, 110, 200, 220 VAC |
|------------------------------------|--|---|
| Grommet | L plug connector | M plug connector |
| G : Lead wire length 300 mm | L : With lead wire (Length 300 mm) | M : With lead wire (Length 300 mm) |
| H : Lead wire length 600 mm | LN : Without lead wire | MN : Without lead wire |
| W□ : With connector cable | LO : Without connector | MO : Without connector |
| DC | ● | ● |
| AC | ● | ● |
| DIN terminal | D, Y : With connector | DO, YO : Without connector |
| DC | ● | ● |
| AC | ● | ● |

- * LN, MN type: with 2 sockets.
- * For DIN terminal of SY3000 series, refer to page 639.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.
- * For connector cable of M8 connector, refer to page 641.
- * M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.
- * Refer to page 638 for the lead wire length of L and M plug connectors.
- * Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

A, B port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |
| 02 | 1/4 | SY9000 |
| 03 | 3/8 | SY9000 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |
| C8 | One-touch fitting for ø8 | SY9000 |
| C10 | One-touch fitting for ø10 | SY9000 |
| C12 | One-touch fitting for ø12 | SY9000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø 3/32 | SY3000 |
| N7 | One-touch fitting for ø 1/4" | SY3000 |
| N3 | One-touch fitting for ø 3/32 | SY5000 |
| N7 | One-touch fitting for ø 1/4" | SY5000 |
| N9 | One-touch fitting for ø 5/16 | SY5000 |
| N9 | One-touch fitting for ø 5/16 | SY7000 |
| N11 | One-touch fitting for ø 3/8" | SY7000 |
| N9 | One-touch fitting for ø 5/16 | SY9000 |
| N11 | One-touch fitting for ø 3/8" | SY9000 |

Manual override

| | | |
|------------------------------------|---|---|
| Nil : Non-locking push type | D : Push-turn locking slotted type | E : Push-turn locking lever type |
|------------------------------------|---|---|

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | Without light/surge voltage suppressor |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

- * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
- * For "R" and "U", DC voltage is only available.
- * Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | Without light/surge voltage suppressor |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

- * DOZ and YOZ are not available.
- * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary. (For details, refer to page 467.)


Bracket

Nil: Without bracket
F1: With foot bracket

(2 position single only)



F2: With side bracket



* SY9000 has no bracket.

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

Made to Order

| | |
|-----|---|
| Nil | — |
| X20 | Body ported external pilot (Refer to page B24). |
| X90 | Main valve fluororubber (Refer to page B24). |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |


Note) AC-type models that are CE-compliant have DIN terminals only.

CE-compliant

CE-compliant

Body Ported SY3000/5000/7000/9000 Series

Specifications



| Series | | SY3000 | SY5000 | SY7000 | SY9000 |
|--|---------------------------|---|--------|--------|--------|
| Fluid | | Air | | | |
| Internal pilot | 2 position single | 0.15 to 0.7 | | | |
| Operating pressure range (MPa) | 2 position double | 0.1 to 0.7 | | | |
| | 3 position | 0.2 to 0.7 | | | |
| Ambient and fluid temperature (°C) | | -10 to 50 (No freezing) | | | |
| Max. operating frequency (Hz) | 2 position single, double | 10 | 5 | 5 | 5 |
| | 3 position | 3 | 3 | 3 | 3 |
| Manual override (Manual operation) | | Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type | | | |
| Pilot exhaust method | | Common exhaust type for main and pilot valve | | | |
| Lubrication | | Not required | | | |
| Mounting orientation | | Unrestricted | | | |
| Impact/Vibration resistance (m/s ²) ^{Note)} | | 150/30 | | | |
| Enclosure | | Dust proof (* DIN terminal and M8 connector: IP65) | | | |

* Based on IEC60529

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)



Made to Order

(For details, refer to pages 616 to 628.)

Solenoid Specifications

| | | | | | |
|-------------------------------|-------------|--|--|--|--|
| Electrical entry | | Grommet (G), (H) L plug connector (L) M plug connector (M) | | DIN terminal (D), (Y) M8 connector (W) | |
| | | G, H, L, M, W | | D, Y | |
| Coil rated voltage (V) | DC | 24, 12, 6, 5, 3 | | 24, 12 | |
| | AC 50/60 Hz | 100, 110, 200, 220 | | | |
| Allowable voltage fluctuation | | ±10% of rated voltage * | | | |
| Power consumption (W) | DC | Standard | 0.35 (With indicator light: 0.4 DIN terminal with indicator light: 0.45) | | |
| | | With power saving circuit | 0.1 (With indicator light only) * [Starting 0.4, Holding 0.1] | | |
| Apparent power (VA) * | AC | 100 V | 0.78 (With indicator light: 0.81) | 0.78 (With indicator light: 0.87) | |
| | | 110 V [115 V] | 0.86 (With indicator light: 0.89) [0.94 (With indicator light: 0.97)] | 0.86 (With indicator light: 0.97) [0.94 (With indicator light: 1.07)] | |
| | | 200 V | 1.18 (With indicator light: 1.22) | 1.15 (With indicator light: 1.30) | |
| | | 220 V [230 V] | 1.30 (With indicator light: 1.34) [1.42 (With indicator light: 1.46)] | 1.27 (With indicator light: 1.46) [1.39 (With indicator light: 1.60)] | |
| Surge voltage suppressor | | Diode (Varistor is for DIN terminal and Non-polar type.) | | | |
| Indicator light | | LED (AC of DIN connector is neon light.) | | | |

* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

* DIN terminal and M8 connector with power saving circuit are not available.

* For details, refer to page 636.

Response Time

Note) Based on dynamic performance test, JIS B 8419: 2010. (Coil temperature: 20°C, at rated voltage)

SY3000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|-------------------|---|-------------------------------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | |
| | | Type S, Z | Type R, U |
| 2 position single | 12 or less | 15 or less | 12 or less |
| 2 position double | 10 or less | 13 or less | 10 or less |
| 3 position | 15 or less | 20 or less | 16 or less |

SY5000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|-------------------|---|-------------------------------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | |
| | | Type S, Z | Type R, U |
| 2 position single | 19 or less | 26 or less | 19 or less |
| 2 position double | 18 or less | 22 or less | 18 or less |
| 3 position | 32 or less | 38 or less | 32 or less |

SY7000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|-------------------|---|-------------------------------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | |
| | | Type S, Z | Type R, U |
| 2 position single | 31 or less | 38 or less | 33 or less |
| 2 position double | 27 or less | 30 or less | 28 or less |
| 3 position | 50 or less | 56 or less | 50 or less |

SY9000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|-------------------|---|-------------------------------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | |
| | | Type S, Z | Type R, U |
| 2 position single | 35 or less | 41 or less | 35 or less |
| 2 position double | 35 or less | 41 or less | 35 or less |
| 3 position | 62 or less | 64 or less | 62 or less |

SY3000/5000/7000/9000 Series

Flow Rate Characteristics/Weight

SY3000 series

| Valve model | Type of actuation | Port size | | Flow rate characteristics | | | | | | Weight (g) | | |
|-----------------|-------------------|------------------------|----------------------------------|----------------------------|------|---------------------|----------------------------|--------------|--------------------------|----------------------|----|----|
| | | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1→4/2 (P→A/B) | | 4/2→5/3 (A/B→EA/EB) | | Gro- mmet | L/M plug connector | W M8 connector | | |
| | | | | C (dm ³ /s-bar) | b | Cv | C (dm ³ /s-bar) | b | Cv | | | |
| SY3020 -□-M5 | 2 position | M5 x 0.8 | | 0.61 | 0.44 | 0.16 | 0.64 | 0.45 | 0.18 | 51 | 53 | 57 |
| | Double | | | | | | | | | 68 | 74 | 82 |
| | Closed center | | | | | | | | | 71 | 76 | 84 |
| | 3 position | | | | | | | | | | | |
| SY3020 -□-C4 | 2 position | M5 x 0.8 | C4 (One-touch fitting for ø4) | 0.72 | 0.29 | 0.18 | 0.64 | 0.34 | 0.17 | 60 | 63 | 67 |
| | Double | | | | | | | | | 78 | 83 | 91 |
| | Closed center | | | | | | | | | 81 | 86 | 94 |
| | 3 position | | | | | | | | | | | |
| SY3020 -□-C6 | 2 position | M5 x 0.8 | C6 (One-touch fitting for ø6) | 0.76 | 0.30 | 0.19 | 0.65 | 0.39 | 0.17 | 56 | 59 | 63 |
| | Double | | | | | | | | | 74 | 79 | 87 |
| | Closed center | | | | | | | | | 77 | 82 | 90 |
| | 3 position | | | | | | | | | | | |

Note) []: denotes normal position.

SY7000 series

| Valve model | Type of actuation | Port size | | Flow rate characteristics | | | | | | Weight (g) | | |
|------------------|-------------------|------------------------|------------------------------------|----------------------------|------|---------------------|----------------------------|--------------|--------------------------|-----------------|----------------------|-----|
| | | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1→4/2 (P→A/B) | | 4/2→5/3 (A/B→EA/EB) | | Gro- mmet | L/M plug connector | DIN terminal | W M8 connector | |
| | | | | C (dm ³ /s-bar) | b | Cv | C (dm ³ /s-bar) | b | Cv | | | |
| SY7020 -□-02 | 2 position | 1/4 | | 4.1 | 0.23 | 0.93 | 3.3 | 0.33 | 0.81 | 101 | 104 | 125 |
| | Double | | | | | | | | | 120 | 125 | 167 |
| | Closed center | | | | | | | | | 128 | 133 | 175 |
| | 3 position | | | | | | | | | | | |
| SY7020 -□-C8 | 2 position | 1/4 | C8 (One-touch fitting for ø8) | 3.2 | 0.26 | 0.77 | 3.2 | 0.37 | 0.82 | 107 | 110 | 131 |
| | Double | | | | | | | | | 126 | 132 | 174 |
| | Closed center | | | | | | | | | 134 | 140 | 182 |
| | 3 position | | | | | | | | | | | |
| SY7020 -□-C10 | 2 position | 1/4 | C10 (One-touch fitting for ø10) | 3.8 | 0.26 | 0.86 | 3.2 | 0.34 | 0.82 | 103 | 105 | 126 |
| | Double | | | | | | | | | 122 | 127 | 169 |
| | Closed center | | | | | | | | | 130 | 135 | 177 |
| | 3 position | | | | | | | | | | | |

Note) []: denotes normal position.

SY5000 series

| Valve model | Type of actuation | Port size | | Flow rate characteristics | | | | | | Weight (g) | | |
|-----------------|-------------------|------------------------|----------------------------------|----------------------------|------|---------------------|----------------------------|--------------|--------------------------|-----------------|----------------------|-----|
| | | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1→4/2 (P→A/B) | | 4/2→5/3 (A/B→EA/EB) | | Gro- mmet | L/M plug connector | DIN terminal | W M8 connector | |
| | | | | C (dm ³ /s-bar) | b | Cv | C (dm ³ /s-bar) | b | Cv | | | |
| SY5020 -□-01 | 2 position | 1/8 | | 1.9 | 0.35 | 0.49 | 2.4 | 0.39 | 0.61 | 70 | 72 | 93 |
| | Double | | | | | | | | | 88 | 93 | 135 |
| | Closed center | | | | | | | | | 93 | 98 | 140 |
| | 3 position | | | | | | | | | | | |
| SY5020 -□-C4 | 2 position | 1/8 | C4 (One-touch fitting for ø4) | 0.75 | 0.43 | 0.20 | 0.85 | 0.64 | 0.30 | 94 | 96 | 117 |
| | Double | | | | | | | | | 111 | 117 | 159 |
| | Closed center | | | | | | | | | 117 | 122 | 164 |
| | 3 position | | | | | | | | | | | |
| SY5020 -□-C6 | 2 position | 1/8 | C6 (One-touch fitting for ø6) | 1.5 | 0.33 | 0.33 | 2.0 | 0.37 | 0.52 | 88 | 91 | 112 |
| | Double | | | | | | | | | 106 | 111 | 153 |
| | Closed center | | | | | | | | | 111 | 116 | 158 |
| | 3 position | | | | | | | | | | | |
| SY5020 -□-C8 | 2 position | 1/8 | C8 (One-touch fitting for ø8) | 1.9 | 0.21 | 0.45 | 2.3 | 0.29 | 0.57 | 80 | 82 | 103 |
| | Double | | | | | | | | | 98 | 103 | 145 |
| | Closed center | | | | | | | | | 103 | 108 | 150 |
| | 3 position | | | | | | | | | | | |

Note) []: denotes normal position.






SY9000 series

| Valve model | Type of actuation | Port size | | Flow rate characteristics | | | | | | Weight (g) | | |
|------------------|-------------------|------------------------|------------------------------------|----------------------------|------|---------------------|----------------------------|--------------|--------------------------|-----------------|----------------------|-----|
| | | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1→4/2 (P→A/B) | | 4/2→5/3 (A/B→EA/EB) | | Gro- mmet | L/M plug connector | DIN terminal | W M8 connector | |
| | | | | C (dm ³ /s-bar) | b | Cv | C (dm ³ /s-bar) | b | Cv | | | |
| SY9020 -□-02 | 2 position | 1/4 | | 7.0 | 0.33 | 1.7 | 7.6 | 0.35 | 2.0 | 241 | 244 | 265 |
| | Double | | | | | | | | | 260 | 266 | 308 |
| | Closed center | | | | | | | | | 284 | 290 | 332 |
| | 3 position | | | | | | | | | | | |
| SY9020 -□-03 | 2 position | 3/8 | | 8.0 | 0.29 | 1.9 | 8.0 | 0.33 | 2.0 | 236 | 239 | 260 |
| | Double | | | | | | | | | 255 | 261 | 303 |
| | Closed center | | | | | | | | | 279 | 285 | 327 |
| | 3 position | | | | | | | | | | | |
| SY9020 -□-C8 | 2 position | 1/4 | C8 (One-touch fitting for ø8) | 4.3 | 0.31 | 0.99 | 6.1 | 0.28 | 1.4 | 293 | 296 | 317 |
| | Double | | | | | | | | | 312 | 318 | 360 |
| | Closed center | | | | | | | | | 336 | 342 | 384 |
| | 3 position | | | | | | | | | | | |
| SY9020 -□-C10 | 2 position | 1/4 | C10 (One-touch fitting for ø10) | 6.1 | 0.28 | 1.4 | 7.9 | 0.33 | 1.9 | 279 | 282 | 303 |
| | Double | | | | | | | | | 298 | 304 | 346 |
| | Closed center | | | | | | | | | 322 | 328 | 370 |
| | 3 position | | | | | | | | | | | |
| SY9020 -□-C12 | 2 position | 1/2 | C12 (One-touch fitting for ø12) | 7.0 | 0.25 | 1.6 | 8.6 | 0.41 | 2.2 | 265 | 268 | 289 |
| | Double | | | | | | | | | 284 | 290 | 332 |
| | Closed center | | | | | | | | | 308 | 314 | 356 |
| | 3 position | | | | | | | | | | | |




Note) []: denotes normal position.

Construction

SY series

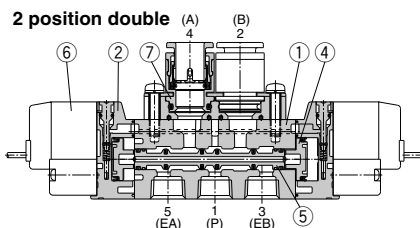

3 position closed center / exhaust center / pressure center

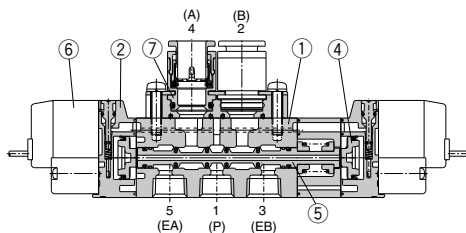

(This figure shows a closed center type.)

Component Parts

| No. | Description | Material | Note |
|-----|-----------------------------|---|----------------------|
| 1 | Body | Aluminum die-casted (SY3000: Zinc die-casted) | White |
| 2 | Adapter plate | Resin | White (SY9000: Gray) |
| 3 | End plate | Resin | White |
| 4 | Piston | Resin | — |
| 5 | Spool valve assembly | Aluminum, H-NBR | — |

Replacement Parts

| No. | Description | Part no. |
|-----|-------------------------------|---|
| 6 | Pilot valve assembly | Refer to "How to Order Pilot Valve Assembly" on page 629. |
| 7 | M5 port block assembly | Refer to "How to Order Port Block Assembly" on page 629. |

Bracket Assembly No.


| Description | Part no. |
|------------------|-----------------------------------|
| Bracket (For F1) | SX000-16-2A (with mounting screw) |
| Bracket (For F2) | SX000-16-1A (with mounting screw) |

* SY9000 has no bracket.

How to Change Port Block Assembly

If using body port type, both A and B port sizes can be changed by replacing the port block assembly mounted on the body. When changing this block assembly, the correct screw torque must be achieved to avoid possible air leakage.

For SY5000

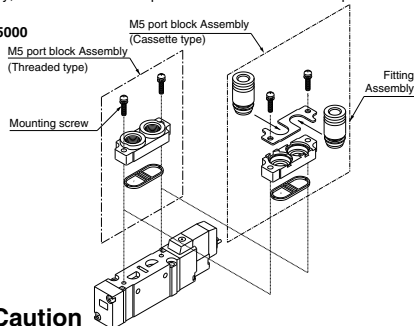

Caution

Mounting screw tightening torques

SY3000 (M2): 0.12 N·m
SY5000 (M3): 0.6 N·m
SY9000 (M4): 1.4 N·m

* Refer to "How to Order Port Block Assembly" on page 629 for part no.


SY3000/5000/7000/9000 Series

Dimensions: SY3000 Series

[] : AC


2 position single

Grommet (G), (H): SY3120-□_G□□-C4, N3
C6, N7(-F2)

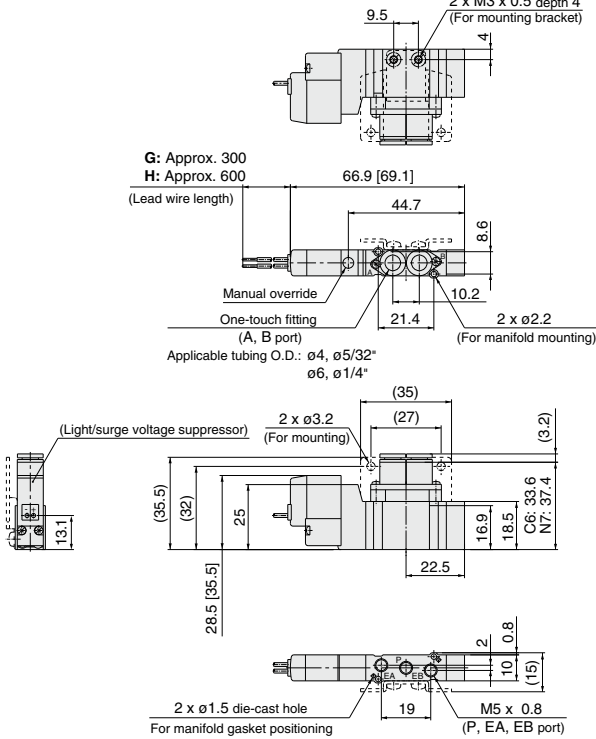


Foot bracket

SY3120-□_G□□-C4, N3
C6, N7-F1

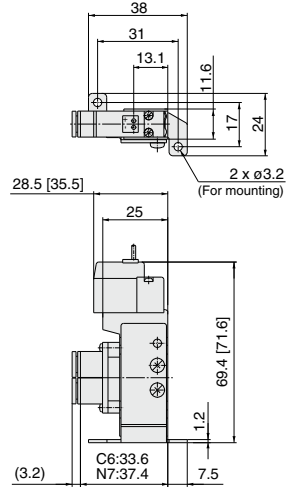


SY3120-□_G□□-M5(-F2)




L plug connector (L):

SY3120-□L□□-C4, N3
C6, N7(-F2)

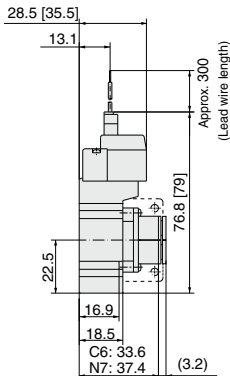


M plug connector (M):

SY3120-□M□□-C4, N3
C6, N7(-F2)

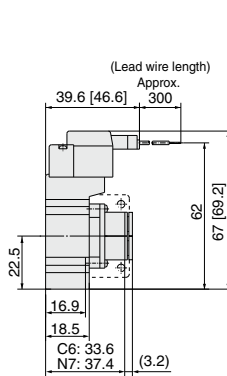

M8 connector (WO):

SY3120-□WO□□-C4, N3
C6, N7(-F2)

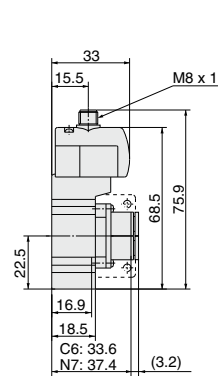




Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY3000 Series


[] : AC

2 position double

Grommet (G), (H): SY3220-□^G□□-C4, N3
C6, N7(-F2)

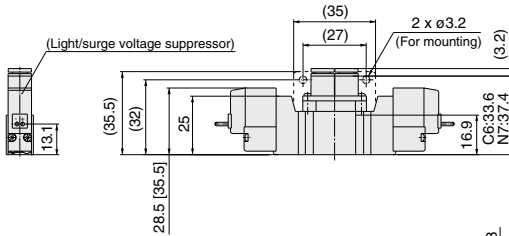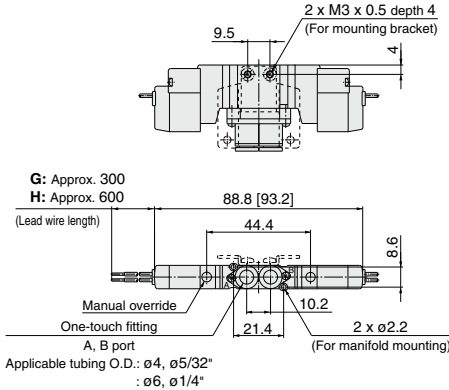

SY3220-□^G□□-M5(-F2)

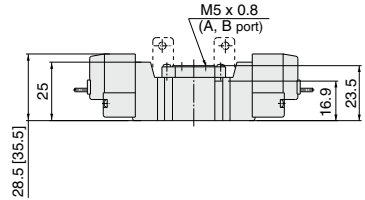

SJ


SY

SY


S0700

S0700


L plug connector (L):
SY3220-□L□□-C4, N3
C6, N7(-F2)

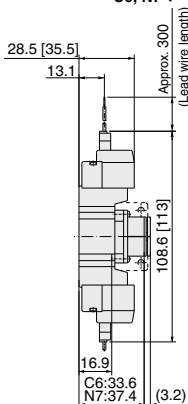

M plug connector (M):
SY3220-□M□□-C4, N3
C6, N7(-F2)



M8 connector (WO):
SY3220-WO□□-C4, N3
C6, N7(-F2)



Note) Refer to page 642 for dimensions of connector types.


SY3000/5000/7000/9000 Series

Dimensions: SY3000 Series


[]: AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY3 $\frac{3}{8}$ 20-□G□□-C4, N3-C6, N7(-F2)

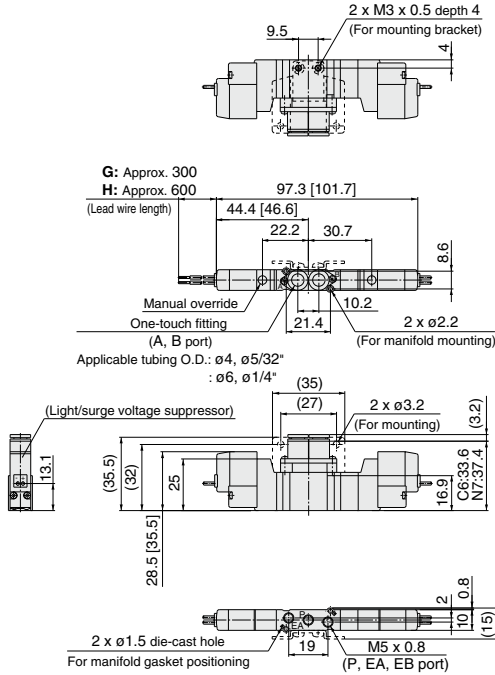


SY3 $\frac{3}{8}$ 20-□H□□-M5(-F2)




L plug connector (L):

SY3 $\frac{3}{8}$ 20-□L□□-C4, N3-C6, N7(-F2)

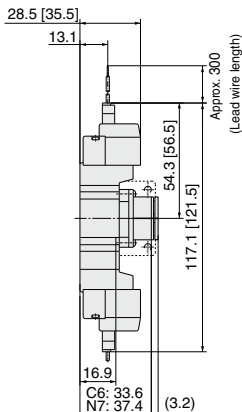


M plug connector (M):

SY3 $\frac{3}{8}$ 20-□M□□-C4, N3-C6, N7(-F2)



M8 connector (WO):

SY3 $\frac{3}{8}$ 20-□WO□□-C4, N3-C6, N7(-F2)

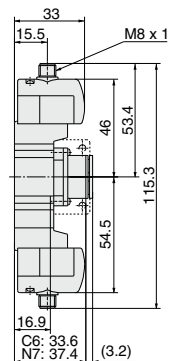

Note) Refer to page 642 for dimensions of connector types.


Body Ported SY3000/5000/7000/9000 Series

Dimensions: SY5000 Series

[] : AC


2 position single

Grommet (G), (H): SY5120-□^G□^H□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₂)

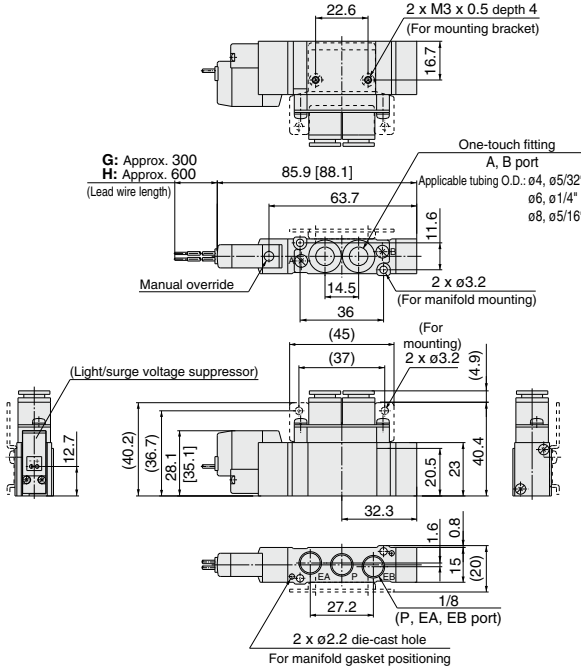


Foot bracket

SY5120-□^G□^H□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₁)

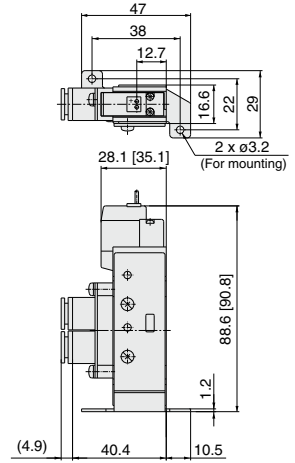


SY5120-□^G□^H□^{C4, N3}□^{C6, N7}□^{C8, N9}-01(-F₂)




L plug connector (L):

SY5120-□^L□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₂)

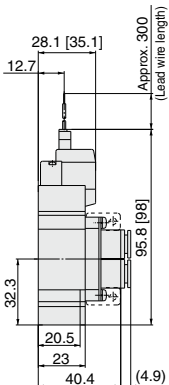


M plug connector (M):

SY5120-□^M□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₂)

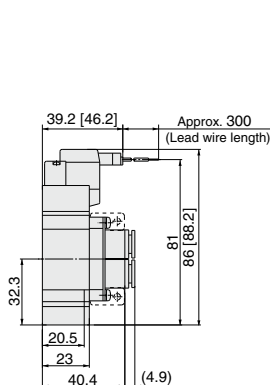


DIN terminal (D, Y):

SY5120-□^{D, Y}□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₂)

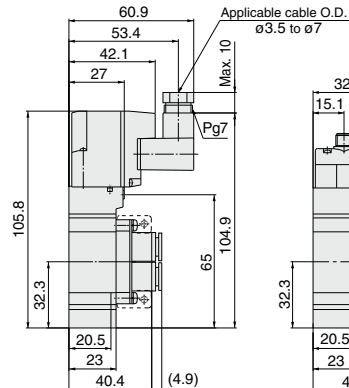

M8 connector (WO):

SY5120-□^{WO}□^{C4, N3}□^{C6, N7}□^{C8, N9}(-F₂)

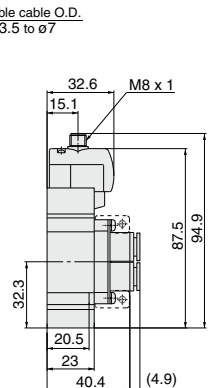

Note) Refer to page 642 for dimensions of connector types.


SY3000/5000/7000/9000 Series

Dimensions: SY5000 Series


[]: AC

2 position double

Grommet (G), (H): SY5220-□G□□-□^{C4, N3}□^{C6, N7}□(-F2)
C8, N9




SY5220-□G□□-01□(-F2)

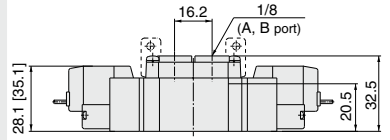

G: Approx. 300
H: Approx. 600
(Lead wire length)

107.2 [111.6]
62.8
11.6
14.5
36
2 x $\phi 3.2$
(For manifold mounting)

One-touch fitting
(A, B port)
Applicable tubing O.D.: $\phi 4, \phi 5/32''$
: $\phi 6, \phi 1/4''$
: $\phi 8, \phi 5/16''$

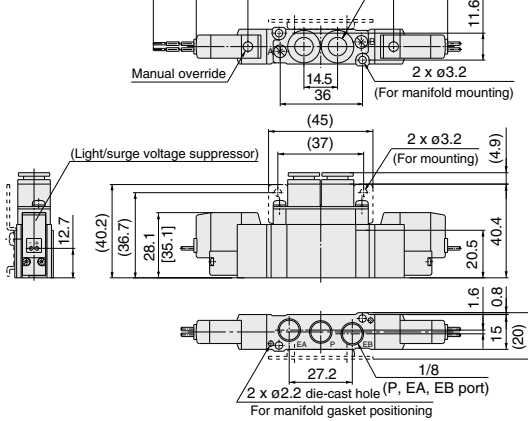

L plug connector (L):

SY5220-□L□□-□^{C4, N3}□^{C6, N7}□(-F2)
C8, N9

M plug connector (M):





SY5220-□M□□-□^{C4, N3}□^{C6, N7}□(-F2)
C8, N9

DIN terminal (D, Y):

SY5220-□D□□-□^{C4, N3}□^{C6, N7}□(-F2)
C8, N9

M8 connector (WO):

SY5220-□WO□□-□^{C4, N3}□^{C6, N7}□(-F2)
C8, N9

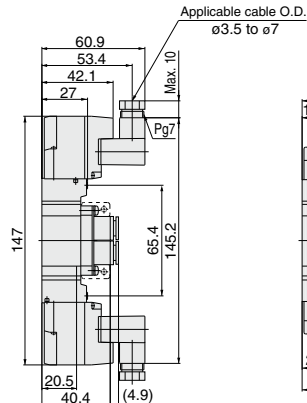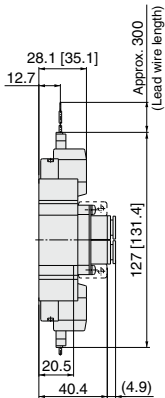

Note) Refer to page 642 for dimensions of connector types.


SY3000/5000/7000/9000 Series

Dimensions: SY7000 Series


[] : AC

2 position single


Grommet (G), (H): SY7120-□G□□-C8, N9□□(-F2)
C10, N11□□(-F2)

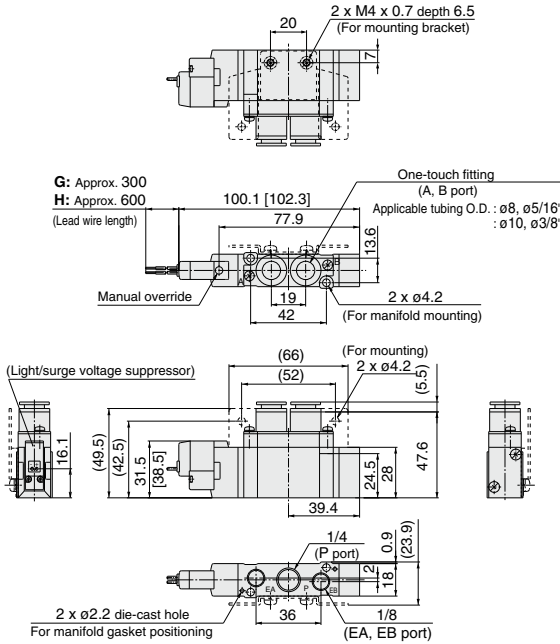

SY7120-□G□□-C8, N9□□(-F1)
C10, N11□□(-F1)

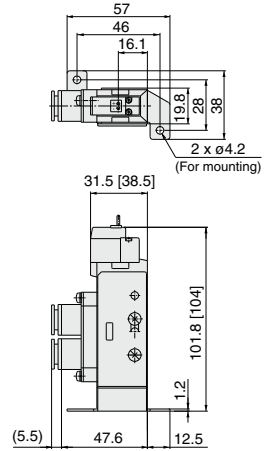


SY7120-□G□□-02□(-F2)




L plug connector (L):

SY7120-□L□□-C8, N9□□(-F2)
C10, N11□□(-F2)

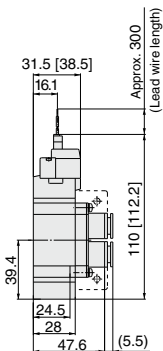


M plug connector (M):

SY7120-□M□□-C8, N9□□(-F2)
C10, N11□□(-F2)




DIN terminal (D, Y):

SY7120-□D□□-C8, N9□□(-F2)
C10, N11□□(-F2)

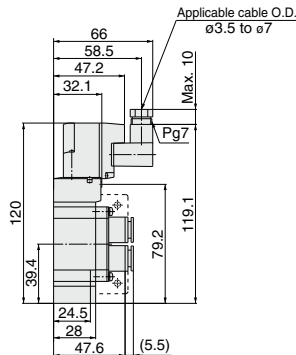

M8 connector (WO):

SY7120-□WO□□-C8, N9□□(-F2)
C10, N11□□(-F2)



(Note) Refer to page 642 for dimensions of connector types.



Dimensions: SY7000 Series

[]: AC

2 position double

Grommet (G), (H): SY7220-□G□□-C8, N9 C10, N11 □(-F2)

SY7220-□G□□-02□(-F2)

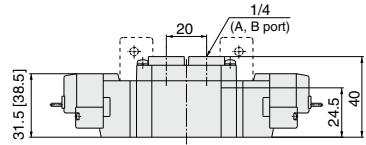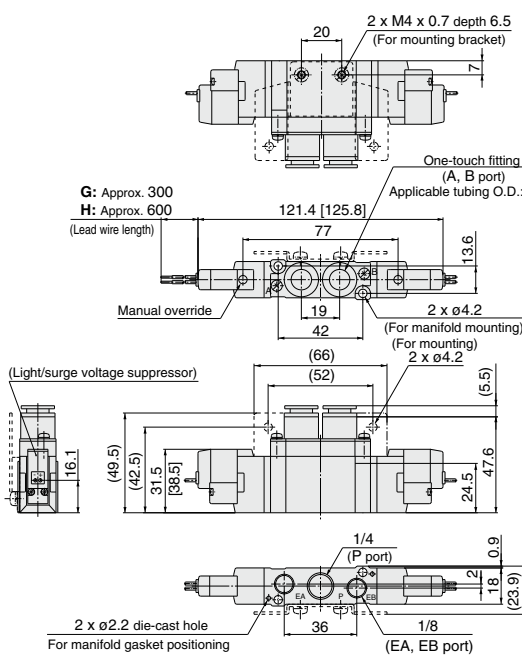

| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

L plug connector (L):

SY7220-□L□□-C8, N9 C10, N11 □(-F2)

M plug connector (M):





SY7220-□M□□-C8, N9 C10, N11 □(-F2)

DIN terminal (D, Y):

SY7220-□D□□-C8, N9 C10, N11 □(-F2)

M8 connector (WO):

SY7220-□WO□□-C8, N9 C10, N11 □(-F2)

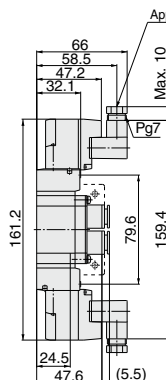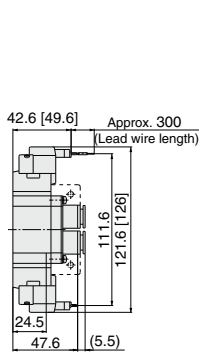

Note) Refer to page 642 for dimensions of connector types.

SY3000/5000/7000/9000 Series



Dimensions: SY7000 Series

[] : AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY7 $\frac{3}{5}$ 20-□□□□-C8, N9
C10, N11 □□(-F2)

SY7 $\frac{3}{5}$ 20-□□□□-02□(-F2)

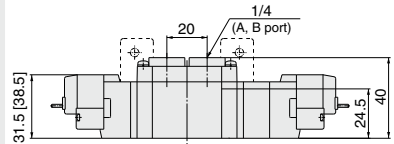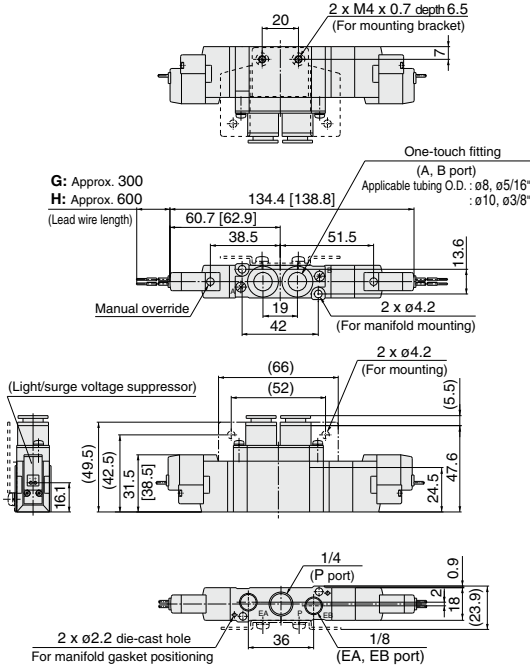

L plug connector (L):

M plug connector (M):

DIN terminal (D, Y):





M8 connector (WO):

SY7 $\frac{3}{5}$ 20-□□□□-C8, N9
C10, N11 □□(-F2)

SY7 $\frac{3}{5}$ 20-□□□□-C8, N9
C10, N11 □□(-F2)

SY7 $\frac{3}{5}$ 20-□□□□-C8, N9
C10, N11 □□(-F2)

SY7 $\frac{3}{5}$ 20-□□□□-C8, N9
C10, N11 □□(-F2)

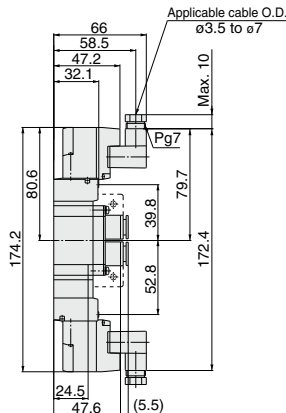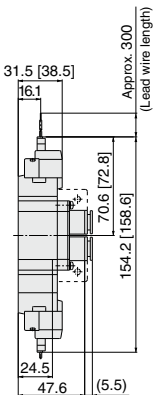

Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY9000 Series



[] AC

2 position single Grommet (G), (H): SY9120-□

□ $\frac{G}{H}$ □ □ □ C8, N9
□ □ □ C10, N11 □
□ □ □ C12

SY9120-□ $\frac{G}{H}$ □ □ □ -02
□ □ □ -03 □

G: Approx. 300
H: Approx. 600
(Lead wire length)

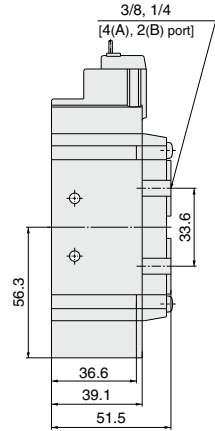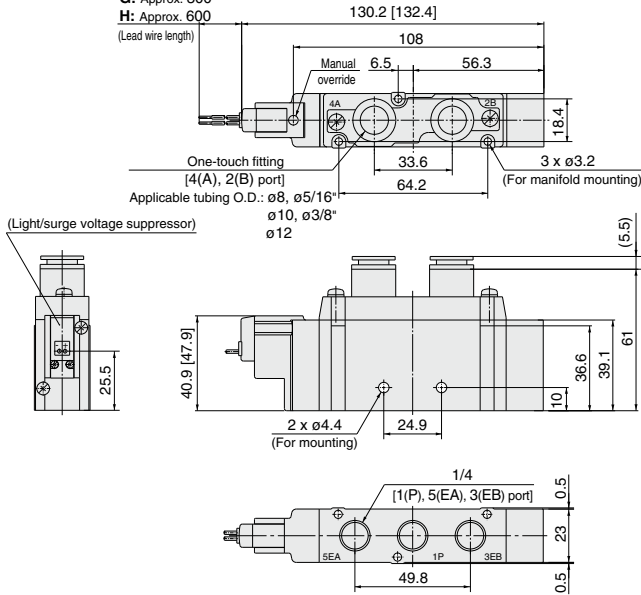

L plug connector (L): SY9120-□L

□ □ □ C8, N9
□ □ □ C10, N11 □
□ □ □ C12

M plug connector (M): SY9120-□M




□ □ □ C8, N9
□ □ □ C10, N11 □
□ □ □ C12

DIN terminal (D, Y): SY9120-□D


□ □ □ C8, N9
□ □ □ C10, N11 □
□ □ □ C12

M8 connector (WO): SY9120-□WO

□ □ □ C8, N9
□ □ □ C10, N11 □
□ □ □ C12

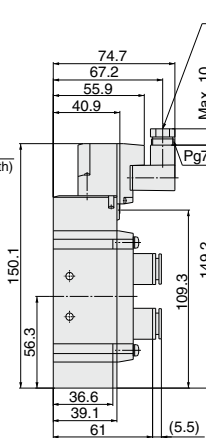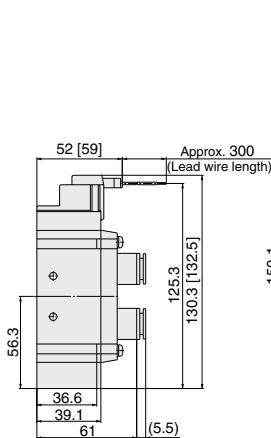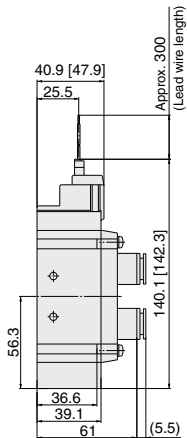

Applicable cable O.D.
ø3.5 to ø7

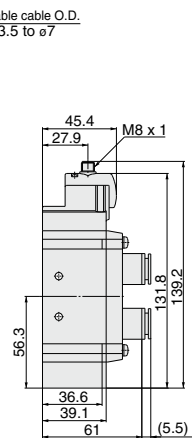

Note) Refer to page 642 for dimensions of connector types.

SY3000/5000/7000/9000 Series

Dimensions: SY9000 Series



[] : AC

2 position double

Grommet (G), (H): SY9220-□^G□□□^{C8, N9}□□□^{C10, N11}□□^{C12}

G: Approx. 300
H: Approx. 600

SY9220-□^G□□□^{C8, N9}□□□^{C10, N11}□□□^{C12}



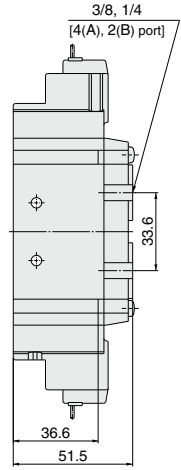
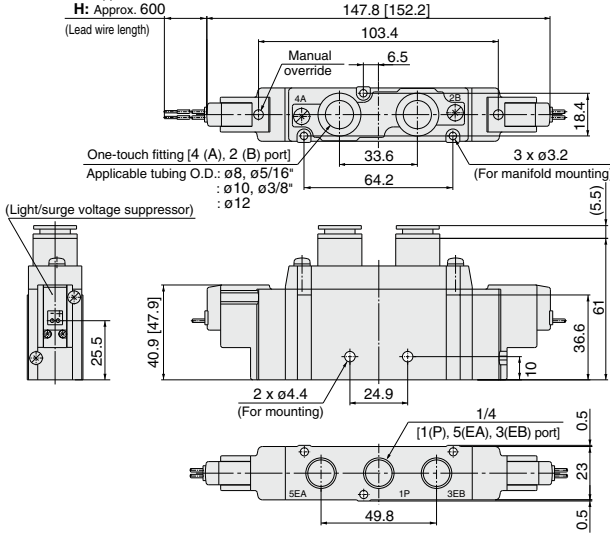


L plug connector (L): SY9220-□^L□□□^{C8, N9}□□□^{C10, N11}□□□^{C12}

M plug connector (M): SY9220-□^M□□□^{C8, N9}□□□^{C10, N11}□□□^{C12}

DIN terminal (D, Y): SY9220-□^{D, Y}□□□^{C8, N9}□□□^{C10, N11}□□□^{C12}

M8 connector (WO): SY9220-□^{WO}□□□^{C8, N9}□□□^{C10, N11}□□□^{C12}

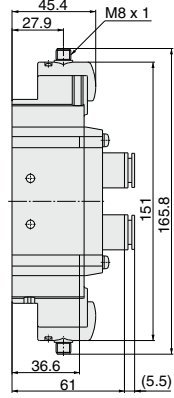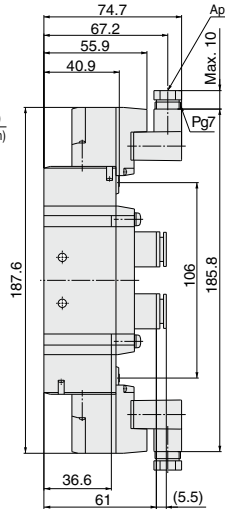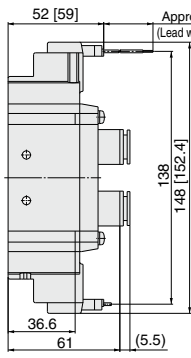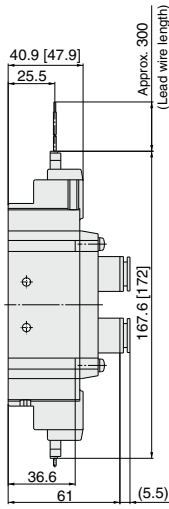

Note) Refer to page 642 for dimensions of connector types.


Dimensions: SY9000 Series

[]: AC


3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY9³/₅20-□^G□□-^{C8, N9}□□-^{C10, N11}□□^{C12}

G: Approx. 300
H: Approx. 600
(Lead wire length)

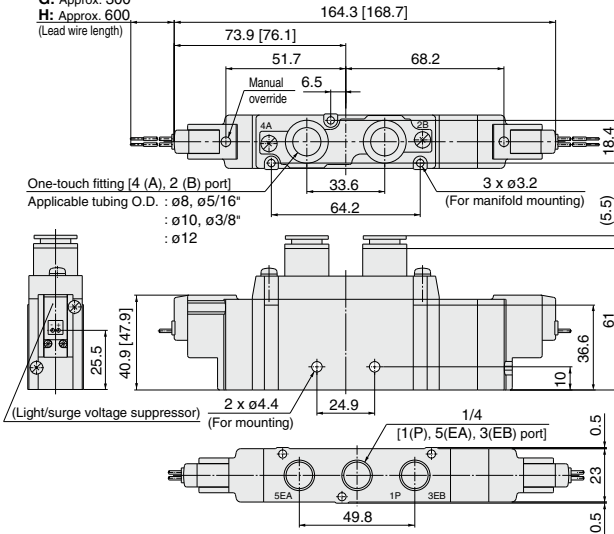


SY9³/₅20-□^G□□-^{C8, N9}□□-^{C10, N11}□□^{C12}

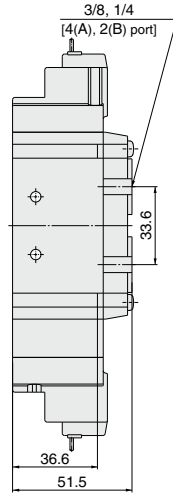


L plug connector (L):

SY9³/₅20-□^L□□-^{C8, N9}□□-^{C10, N11}□□^{C12}

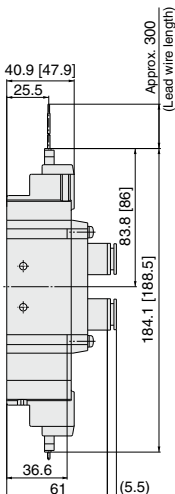


M plug connector (M):

SY9³/₅20-□^M□□-^{C8, N9}□□-^{C10, N11}□□^{C12}




DIN terminal (D, Y):

SY9³/₅20-□^{D, Y}□□-^{C8, N9}□□-^{C10, N11}□□^{C12}

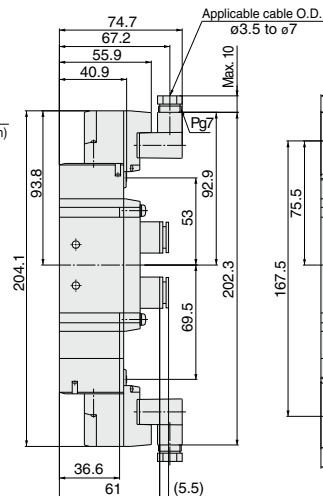

M8 connector (WO):

SY9³/₅20-□^{WO}□□-^{C8, N9}□□-^{C10, N11}□□^{C12}

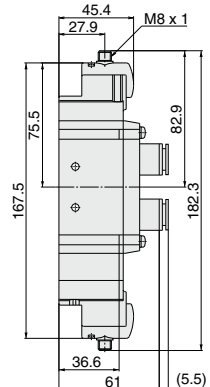

Note) Refer to page 642 for dimensions of connector types.

5 Port Solenoid Valve

Base Mounted/Single Unit

SY3000/5000/7000/9000 Series



[Option]
Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order

SY **5** **2** **40** [] [] - **5** **L** [] [] - [] [] - [] []

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

Type of actuation

| | |
|---|---|
| 1 | 2 position single (A)4 2(B) (EA)5 1 3(EB) (P) |
| 2 | 2 position double (A)4 2(B) (EA)5 1 3(EB) (P) |
| 3 | 3 position closed center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 5 | 3 position pressure center (A)4 2(B) (EA)5 1 3(EB) (P) |

Note) For details about Symbol of the 3 position type of SY9000 series, refer to page 423.

Pilot type

| | |
|-----|-----------------|
| Nil | Internal pilot |
| R | External pilot* |

* External pilot specifications for SY3000 DIN terminal are not available.

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

For AC (50/60 Hz)

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.

Port size

| Symbol | Port size | Applicable series |
|--------|--------------------|-------------------|
| Nil | Without sub-plate | |
| 01 | 1/8 With sub-plate | SY3000 |
| 02 | 1/4 With sub-plate | SY5000 SY7000 |
| 03 | 3/8 With sub-plate | SY7000 SY9000 |
| 04 | 1/2 With sub-plate | SY9000 |


Thread type

| Nil | Rc |
|-----|------|
| F | G |
| N | NPT |
| T | NPTF |

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

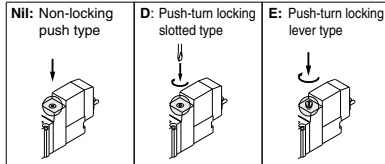

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

| | 24, 12, 6, 5, 3 VDC / 100, 110, 200, 220 VAC | | | | 24, 12 VDC / 100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC |
|----------------------------|--|-----------------------------------|-----------------------------------|-----------------------|-------------------------------------|---------------------------------|
| | Grommet | L plug connector | M plug connector | MN: Without lead wire | D, Y. With connector | WO: Without connector cable |
| G: Lead wire length 300 mm | | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | MN: Without lead wire | | WO: Without connector cable |
| H: Lead wire length 600 mm | | LN: Without lead wire | LO: Without connector | MO: Without connector | DO, YO: Without connector | WO: With connector cable (Note) |
| CE-compliant | DC | AC | AC | AC | AC | AC |

* LN, MN type: with 2 sockets.

* The DIN terminal of SY3000 series cannot be mounted on the standard sub-plate. For details, refer to page 639.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.

* For connector cable of M8 connector, refer to page 641.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.


* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Specifications

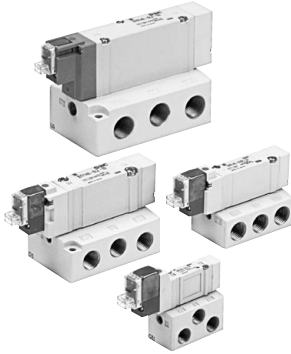

Made to Order
(For details, refer to pages 616 to 628.)

| Series | | SY3000 | SY5000 | SY7000 | SY9000 |
|--|---------------------------|---|-------------|--------|--------|
| Fluid | | Air | | | |
| Internal pilot | 2 position single | 0.15 to 0.7 | | | |
| | 2 position double | 0.1 to 0.7 | | | |
| Operating pressure range (MPa) | 3 position | 0.2 to 0.7 | | | |
| | Operating pressure range | -100 kPa to 0.7 | | | |
| External pilot | Pilot pressure | 2 position single | 0.25 to 0.7 | | |
| | | 2 position double | 0.25 to 0.7 | | |
| | range | 3 position | 0.25 to 0.7 | | |
| Ambient and fluid temperature (°C) | | -10 to 50 (No freezing.) | | | |
| Max. operating frequency (Hz) | 2 position single, double | 10 | 5 | 5 | 5 |
| | 3 position | 3 | 3 | 3 | 3 |
| Manual override (Manual operation) | | Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type | | | |
| Pilot exhaust method | Internal pilot | Common exhaust type for main and pilot valve | | | |
| | External pilot | Pilot valve individual exhaust | | | |
| Lubrication | | Not required | | | |
| Mounting orientation | | Unrestricted | | | |
| Impact/Vibration resistance (m/s²) <small>Note</small> | | 150/30 | | | |
| Enclosure | | Dust proof (* DIN terminal and M8 connector: IP65) | | | |

* Based on IEC60529

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition. (Values at the initial period)

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

SJ

SY

SY

S0700

S0700

Response Time

Note) Based on dynamic performance test, JIS B 8419: 2010. (Coil temperature: 20°C, at rated voltage)

SY3000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | | |
|-------------------|--|-------------------------------------|------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | Type S, Z | Type R, U |
| 2 position single | 12 or less | 15 or less | 12 or less | 12 or less |
| 2 position double | 10 or less | 13 or less | 10 or less | 10 or less |
| 3 position | 15 or less | 20 or less | 16 or less | 16 or less |

SY5000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | | |
|-------------------|--|-------------------------------------|------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | Type S, Z | Type R, U |
| 2 position single | 19 or less | 26 or less | 19 or less | 19 or less |
| 2 position double | 18 or less | 22 or less | 18 or less | 18 or less |
| 3 position | 32 or less | 38 or less | 32 or less | 32 or less |

SY7000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | | |
|-------------------|--|-------------------------------------|------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | Type S, Z | Type R, U |
| 2 position single | 31 or less | 38 or less | 33 or less | 33 or less |
| 2 position double | 27 or less | 30 or less | 28 or less | 28 or less |
| 3 position | 50 or less | 56 or less | 50 or less | 50 or less |

SY9000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | | |
|-------------------|--|-------------------------------------|------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | Type S, Z | Type R, U |
| 2 position single | 35 or less | 41 or less | 35 or less | 35 or less |
| 2 position double | 35 or less | 41 or less | 35 or less | 35 or less |
| 3 position | 62 or less | 64 or less | 62 or less | 62 or less |

Solenoid Specifications

| Electrical entry | | Grommet (G), (H) L plug connector (L) M plug connector (M) | DIN terminal (D), (Y) M8 connector (W) |
|--------------------------------------|---------------------------|--|---|
| Coil rated voltage (V) | DC | G, H, L, M, W | D, Y |
| | AC 50/60 Hz | 24, 12, 6, 5, 3 | 24, 12 |
| Allowable voltage fluctuation | | ±10% of rated voltage * | |
| Power consumption (W) | Standard | 0.35 (With indicator light: 0.4 DIN terminal with indicator light: 0.45) | |
| | With power saving circuit | 0.1 (With indicator light only) * [Starting 0.4, Holding 0.1] | |
| Apparent power (VA) * | AC | 100 V | 0.78 (With indicator light: 0.81) 0.78 (With indicator light: 0.87) |
| | | 110 V [115 V] | 0.86 (With indicator light: 0.89) 0.86 (With indicator light: 0.97) 0.94 (With indicator light: 0.97) 0.94 (With indicator light: 1.07) |
| | | 200 V | 1.18 (With indicator light: 1.22) 1.15 (With indicator light: 1.30) |
| | | 220 V [230 V] | 1.30 (With indicator light: 1.34) 1.27 (With indicator light: 1.46) 1.42 (With indicator light: 1.46) 1.39 (With indicator light: 1.60) |
| Surge voltage suppressor | | Diode (Varistor is for DIN terminal and Non-polar type.) | |
| Indicator light | | LED (AC of DIN connector is neon light.) | |

* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

* DIN terminal and M8 connector with power saving circuit are not available.

* For details, refer to page 636.

SY3000/5000/7000/9000 Series

Flow Rate Characteristics/Weight

SY3000 series

| Valve model | Type of actuation | | Port size | Flow rate characteristics ^{Note 1)} | | | | | | Weight (g) ^{Note 2)} | | |
|-------------|-------------------|--------|-----------|--|--------|--------|----------------------------|--------|----------|-------------------------------|---------------------------------------|-------------------|
| | | | | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | | Grommet | L plug connector, M plug connector | W M8 connector |
| | | | | C (dm ³ /s/bar) | b | Cv | C (dm ³ /s/bar) | b | Cv | | | |
| SY3□40-□-01 | 2 position | Single | 1/8 | 1.0 | 0.30 | 0.24 | 1.1 | 0.30 | 0.26 | 84 (50) | 85 (53) | 89 (57) |
| | | Double | | 0.77 | 0.28 | 0.18 | 0.85 | 0.30 | 0.19 | 102 (68) | 107 (73) | 115 (81) |
| | Closed center | 0.73 | | 0.31 | 0.18 | 1.1 | 0.26 | 0.24 | 104 (69) | 109 (74) | 117 (82) | |
| | Exhaust center | 1.2 | | 0.24 | 0.29 | [0.55] | [0.52] | [0.16] | | | | |
| | Pressure center | [0.51] | | [0.45] | [0.14] | 0.89 | 0.47 | 0.24 | | | | |

Note 1) []: denotes the normal position. Note 2) (): denotes without sub-plate.

SY5000 series

| Valve model | Type of actuation | | Port size | Flow rate characteristics ^{Note 1)} | | | | | | Weight (g) ^{Note 2)} | | | |
|-------------|-------------------|--------|-----------|--|--------|------|----------------------------|------|----------|-------------------------------|---------------------------------------|--------------|-------------------|
| | | | | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | | Grommet | L plug connector, M plug connector | DIN terminal | W M8 connector |
| | | | | C (dm ³ /s/bar) | b | Cv | C (dm ³ /s/bar) | b | Cv | | | | |
| SY5□40-□-02 | 2 position | Single | 1/4 | 2.4 | 0.41 | 0.64 | 2.8 | 0.29 | 0.66 | 121 (58) | 123 (61) | 154 (92) | 127 (65) |
| | | Double | | 1.8 | 0.47 | 0.50 | 1.8 | 0.40 | 0.47 | 139 (76) | 144 (81) | 186 (123) | 152 (89) |
| | Closed center | 1.4 | | 0.55 | 0.44 | 3.0 | 0.33 | 0.72 | 144 (82) | 150 (87) | 192 (129) | 158 (95) | |
| | Exhaust center | [1.2] | | [0.48] | [0.37] | | | | | | | | |
| | Pressure center | 3.3 | | 0.36 | 0.85 | 1.8 | 0.40 | 0.48 | | | | | |
| | | [0.84] | [0.60] | [0.28] | | | | | | | | | |

Note 1) []: denotes the normal position. Note 2) (): denotes without sub-plate.

SY7000 series

| Valve model | Type of actuation | | Port size | Flow rate characteristics ^{Note 1)} | | | | | | Weight (g) ^{Note 2)} | | | |
|-------------|-------------------|--------|-----------|--|--------|------|----------------------------|------|-----------|-------------------------------|---------------------------------------|--------------|-------------------|
| | | | | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | | Grommet | L plug connector, M plug connector | DIN terminal | W M8 connector |
| | | | | C (dm ³ /s/bar) | b | Cv | C (dm ³ /s/bar) | b | Cv | | | | |
| SY7□40-□-02 | 2 position | Single | 1/4 | 4.1 | 0.41 | 1.1 | 4.1 | 0.29 | 1.0 | 218 (89) | 221 (92) | 242 (113) | 225 (96) |
| | | Double | | 3.0 | 0.43 | 0.80 | 2.6 | 0.41 | 0.72 | 237 (108) | 242 (113) | 284 (155) | 250 (121) |
| | Closed center | 2.6 | | 0.42 | 0.71 | 4.7 | 0.35 | 1.1 | 239 (110) | 245 (116) | 287 (158) | 253 (124) | |
| | Exhaust center | [1.7] | | [0.48] | [0.49] | | | | | | | | |
| | Pressure center | 5.3 | | 0.39 | 1.3 | 2.2 | 0.49 | 0.63 | | | | | |
| | | [2.3] | [0.49] | [0.65] | | | | | | | | | |
| SY7□40-□-03 | 2 position | Single | 3/8 | 4.9 | 0.29 | 1.2 | 4.5 | 0.27 | 1.1 | 218 (89) | 221 (92) | 242 (113) | 225 (96) |
| | | Double | | 3.0 | 0.40 | 0.80 | 2.6 | 0.45 | 0.73 | 237 (108) | 242 (113) | 284 (155) | 250 (121) |
| | Closed center | 2.6 | | 0.42 | 0.71 | 4.8 | 0.35 | 1.1 | 239 (110) | 245 (116) | 287 (158) | 253 (124) | |
| | Exhaust center | [1.7] | | [0.48] | [0.49] | | | | | | | | |
| | Pressure center | 5.3 | | 0.31 | 1.3 | 2.3 | 0.45 | 0.66 | | | | | |
| | | [2.3] | [0.51] | [0.64] | | | | | | | | | |

Note 1) []: denotes the normal position. Note 2) (): denotes without sub-plate.






SY9000 series

| Valve model | Type of actuation | | Port size | Flow rate characteristics ^{Note 1)} | | | | | | Weight (g) ^{Note 2)} | | | |
|-------------|-------------------|--------|-----------|--|--------|-----|----------------------------|------|-----------|-------------------------------|---------------------------------------|--------------|-------------------|
| | | | | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | | Grommet | L plug connector, M plug connector | DIN terminal | W M8 connector |
| | | | | C (dm ³ /s/bar) | b | Cv | C (dm ³ /s/bar) | b | Cv | | | | |
| SY9□40-□-03 | 2 position | Single | 3/8 | 7.9 | 0.34 | 2.0 | 9.6 | 0.43 | 2.6 | 469(172) | 472(175) | 493(196) | 476(179) |
| | | Double | | 7.5 | 0.33 | 1.8 | 7.3 | 0.30 | 1.7 | 488(191) | 494(197) | 535(239) | 502(205) |
| | Closed center | 7.2 | | 0.34 | 1.7 | 13 | 0.23 | 2.8 | 512(215) | 518(221) | 560(263) | 526(229) | |
| | Exhaust center | [4.0] | | [0.41] | [0.95] | | | | | | | | |
| | Pressure center | 12 | | 0.26 | 2.8 | 6.7 | 0.40 | 1.9 | | | | | |
| | | [3.3] | [0.41] | [0.84] | | | | | | | | | |
| SY9□40-□-04 | 2 position | Single | 1/2 | 8.0 | 0.48 | 2.2 | 10 | 0.29 | 2.5 | 448 (172) | 453 (175) | 472 | 457(179) |
| | | Double | | 7.6 | 0.32 | 1.8 | 7.3 | 0.32 | 1.8 | 467 (191) | 473 (197) | 515 | 481(205) |
| | Closed center | 7.3 | | 0.42 | 2.0 | 13 | 0.32 | 3.6 | 491 (215) | 497 (221) | 539 | 505(229) | |
| | Exhaust center | [4.7] | | [0.54] | [1.5] | | | | | | | | |
| | Pressure center | 12 | | 0.33 | 3.3 | 7.4 | 0.33 | 1.9 | | | | | |
| | | [3.3] | [0.51] | [0.94] | | | | | | | | | |



Note 1) []: denotes the normal position. Note 2) (): denotes without sub-plate.

Construction

SY Series

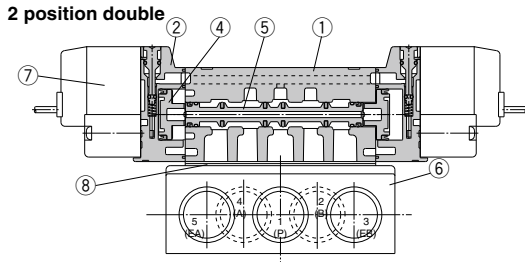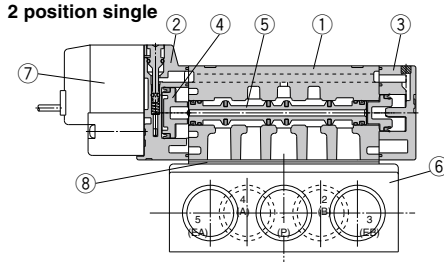

3 position closed center / exhaust center / pressure center

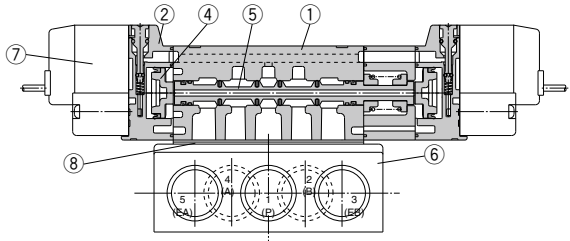

(This figure shows a closed center type.)

Component Parts

| No. | Description | Material | Note |
|-----|-----------------------------|--|-------------------------|
| 1 | Body | Aluminum die-casted (SY3000: Zinc die-casted) | White |
| 2 | Adapter plate | Resin | White (SY9000: Gray) |
| 3 | End plate | Resin | White |
| 4 | Piston | Resin | - |
| 5 | Spool valve assembly | Aluminum, H-NBR | - |

Replacement Parts

| No. | Description | Part No. | | | | Note |
|-----|--|---|------------------------------|--|--|----------------------|
| | | SY3□40 | SY5□40 | SY7□40 | SY9□40 | |
| 6 | Sub-plate <small>(Note)</small> | SY3000-27-1□ | SY5000-27-1□ | 1/4: SY7000-27-1□ 3/8: SY7000-27-2□ | 3/8: SY9000-27-1□ 1/2: SY9000-27-2□ | Aluminum die-casted |
| 7 | Pilot valve assembly | Refer to "How to Order Pilot Valve Assembly" on page 629. | | | | |
| 8 | Gasket | Standard: SY3000-11-25 CE-compliant: SY3000-11-25 | SY5000-11-15 SY5000-11-18 | SY7000-11-11 SY7000-11-14 | SY9000-11-2 SY9000-11-2 | H-NBR |
| - | Round head combination screw | SY3000-23-4 | AC00077 | AC00296 | SY9000-18-2 | For valve mounting |
| - | Reference screw size | (M2 x 21) | (M3 x 26) | (M4 x 31) | (M3 x 42) | (Matt nickel plated) |

* Thread type

⚠ Caution

Mounting screw tightening torques

M2: 0.16 N·m
M3: 0.8 N·m
M4: 1.4 N·m

SY3000/5000/7000/9000 Series

How to Order Interface Regulator

SY3000 series

ARBY3000-05-P-2


Pressure gauge connection port

| | |
|----|--|
| 05 | Pressure gauge (G15-10-01) (for odd number station) |
| 06 | Pressure gauge (G15-10-01) (for even number station) |
| M1 | Plug (M-5P) |


Regulating port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

ARBY3000-05-□-2



ARBY3000-M1-□-2



Note) The M8 connector for wiring cannot be mounted for the ARBY3000 series.

SY5000 series

ARBY5000-00-P-2


Pressure gauge connection port

| | |
|----|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |


Regulating port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

ARBY5000-00-□-2

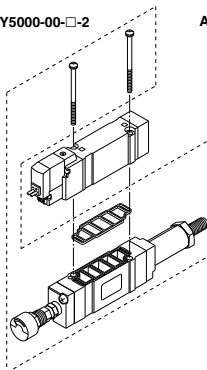

ARBY5000-M1-□-2

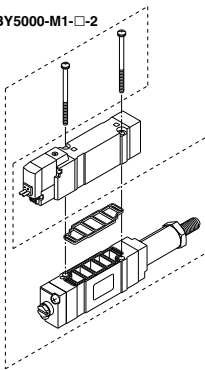

SY7000 series

ARBY7000-00-P-2


Pressure gauge connection port

| | |
|----|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |


Regulating port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

ARBY7000-00-□-2

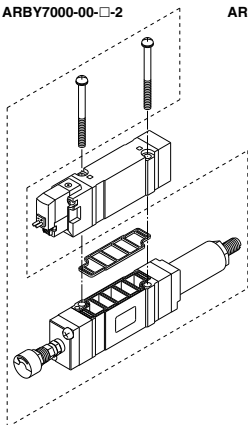

ARBY7000-M1-□-2

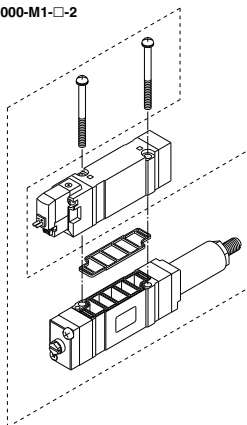

Note) ARBY is not CE-compliant.

Accessory

| Series | Round head combination screw Reference screw size | Gasket |
|----------|--|-------------|
| ARBY3000 | SY3000-23-10 (M2 x 36) | SX3000-57-4 |
| ARBY5000 | AC00283 (M3 x 48.5) | SX5000-57-6 |
| ARBY7000 | AC00282 (M4 x 58) | SX7000-57-5 |

Caution

Mounting screw
tightening torques


M2: 0.16 N·m
M3: 0.8 N·m
M4: 1.4 N·m

Dimensions: SY3000 Series

[] : AC


2 position single

Grommet (G), (H): SY3140(R)-□^G□□-01□

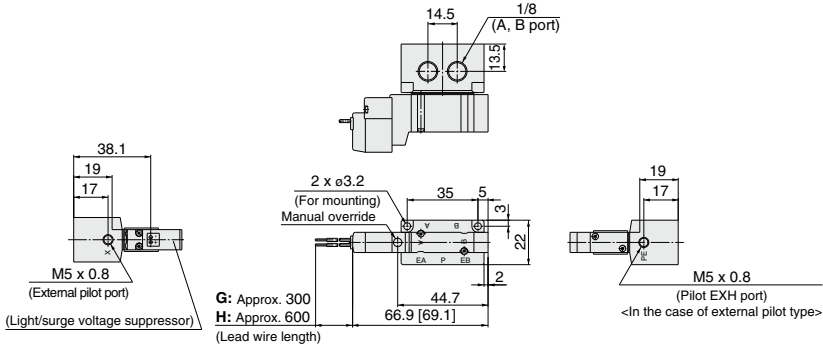


| |
|-------|
| SY |
| SY |
| S0700 |
| S0700 |


**L plug connector (L):
SY3140(R)-□L□□-01□**

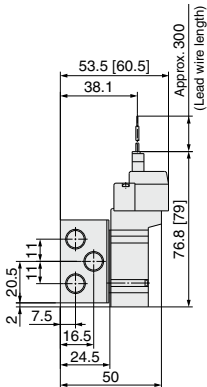

**M plug connector (M):
SY3140(R)-□M□□-01□**



**M8 connector (WO):
SY3140(R)-□WO□□-01□**



Note) Refer to page 642 for dimensions of connector types.


SY3000/5000/7000/9000 Series

Dimensions: SY3000 Series


[]: AC

2 position double


Grommet (G), (H): SY3240(R)-□^G□□-01□

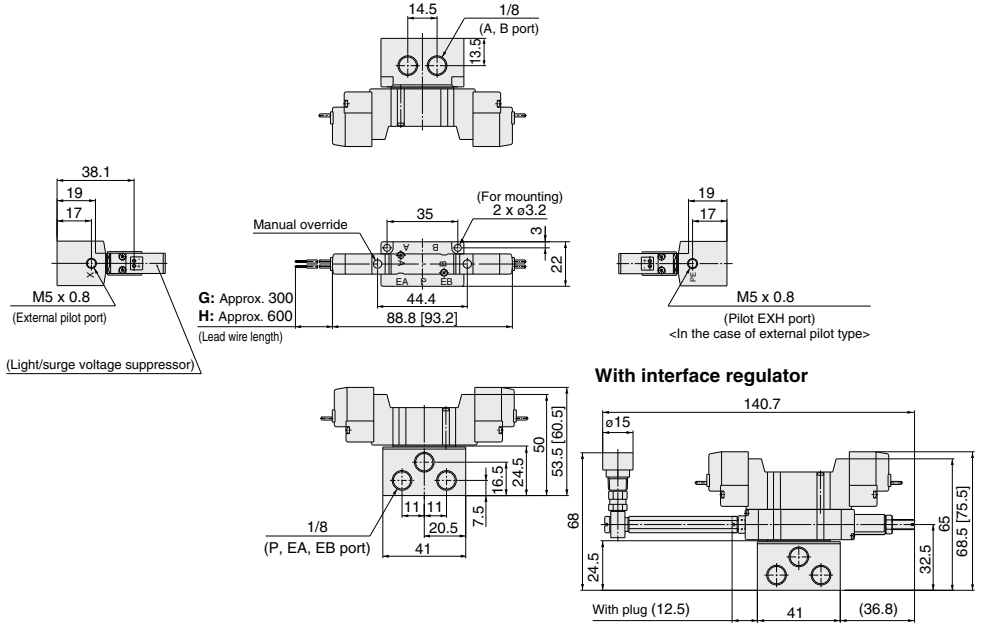


L plug connector (L):
SY3240(R)-□L□□-01□

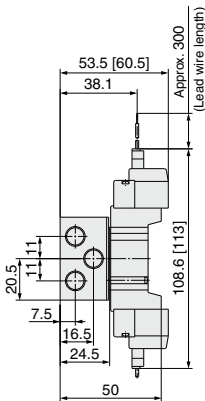

M plug connector (M):
SY3240(R)-□M□□-01□



M8 connector (WO):
SY3240(R)-□WO□□-01□





Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY3000 Series


[] : AC

3 position closed center / exhaust center / pressure center


Grommet (G), (H): SY3 $\frac{3}{5}$ 40(R)-□G□□-01□

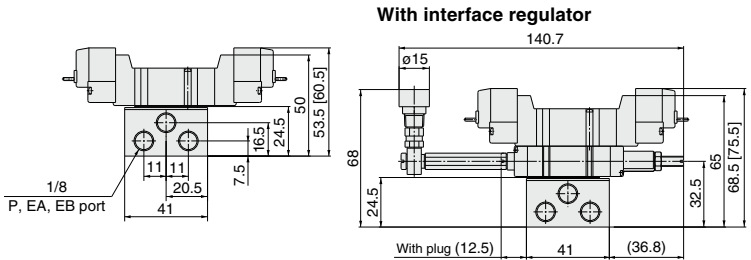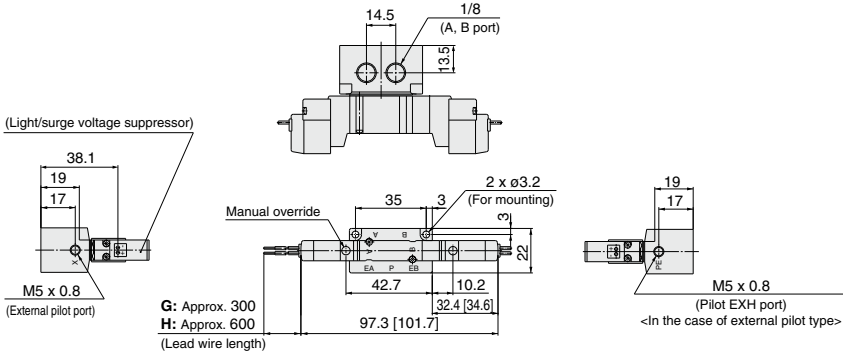


L plug connector (L):
SY3 $\frac{3}{5}$ 40(R)-□L□□-01□

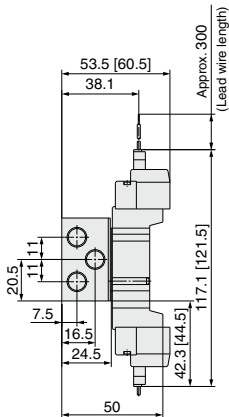

M plug connector (M):
SY3 $\frac{3}{5}$ 40(R)-□M□□-01□



M8 connector (WO):
SY3 $\frac{3}{5}$ 40(R)-□WO□□-01□



Note) Refer to page 642 for dimensions of connector types.

| |
|-------|
| SY |
| SY |
| S0700 |
| S0700 |



SY3000/5000/7000/9000 Series

Dimensions: SY5000 Series


[]: AC

2 position single

Grommet (G), (H): SY5140(R)-□^G□□□-02□

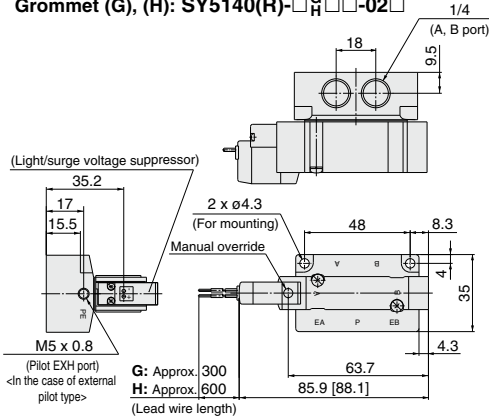

With interface regulator




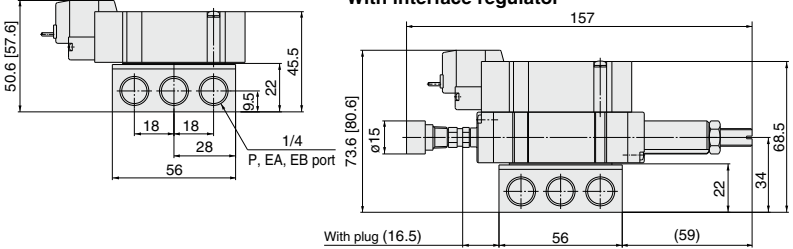


L plug connector (L):
SY5140(R)-□L□□-02□

M plug connector (M):
SY5140(R)-□M□□-02□

DIN terminal (D, Y):
SY5140(R)-□D□□-02□

M8 connector (WO):
SY5140(R)-□WO□□-02□

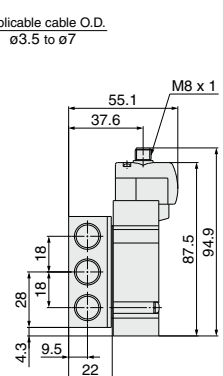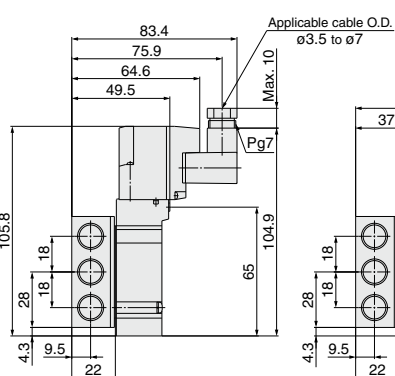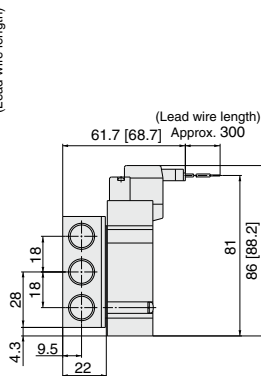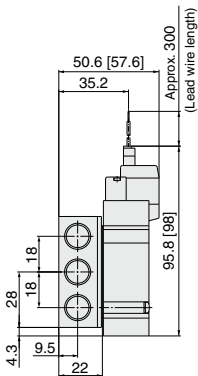


Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY5000 Series


[]: AC

2 position double

Grommet (G), (H): SY5240(R)-□_G□□-02□

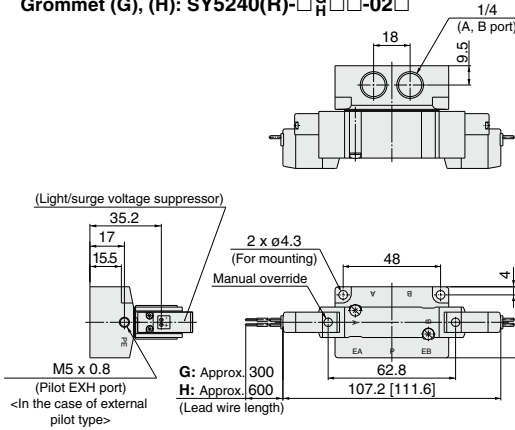

With interface regulator




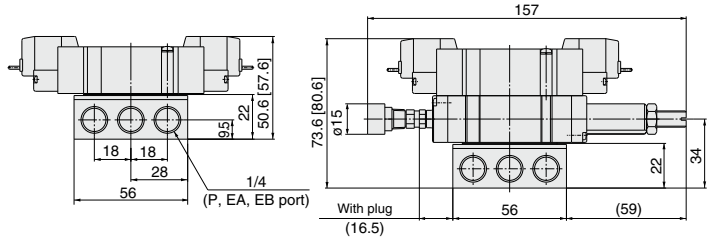


L plug connector (L):
SY5240(R)-□L□□-02□

M plug connector (M):
SY5240(R)-□M□□-02□

DIN terminal (D, Y):
SY5240(R)-□Y□□-02□

M8 connector (WO):
SY5240(R)-□WO□□-02□

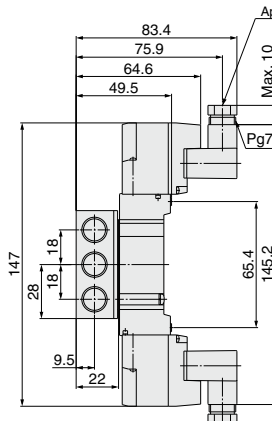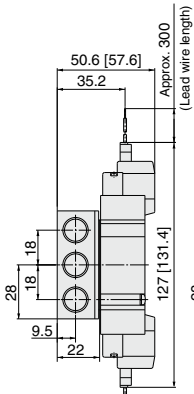

Note) Refer to page 642 for dimensions of connector types.



SY3000/5000/7000/9000 Series

Dimensions: SY5000 Series


[] : AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY5 $\frac{3}{4}$ 40(R)-□ $\frac{G}{H}$ □□-02□

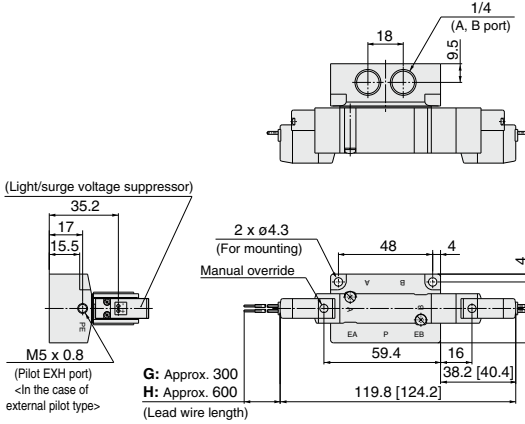

With interface regulator

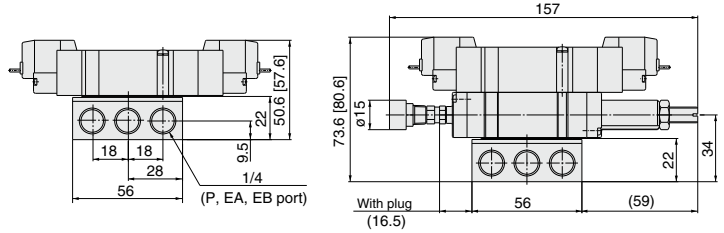

L plug connector (L):

SY5 $\frac{3}{4}$ 40(R)-□L□□-02□

M plug connector (M):




SY5 $\frac{3}{4}$ 40(R)-□M□□-02□

DIN terminal (D, Y):

SY5 $\frac{3}{4}$ 40(R)-□D□□-02□

M8 connector (WO):

SY5 $\frac{3}{4}$ 40(R)-□WO□□-02□

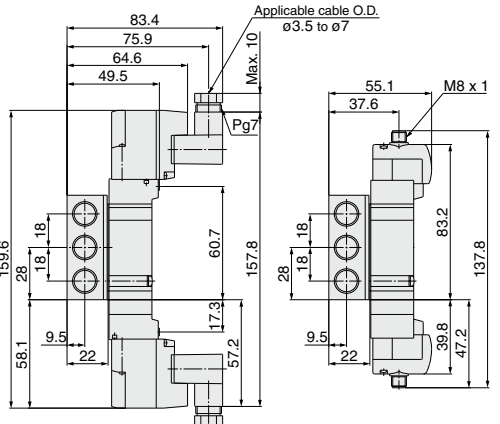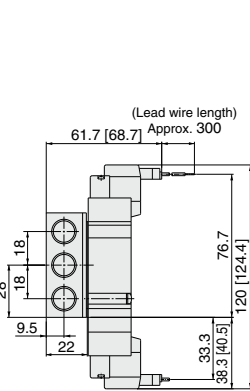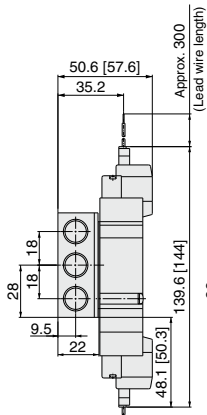


Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY7000 Series


[] : AC

2 position single


Grommet (G), (H): SY7140(R)-□^G□□-02□_H□□-03□




(Light/surge voltage suppressor)

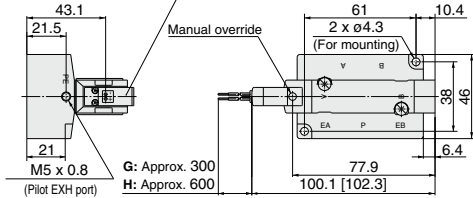

<In the case of external pilot type> (Lead wire length)



With interface regulator



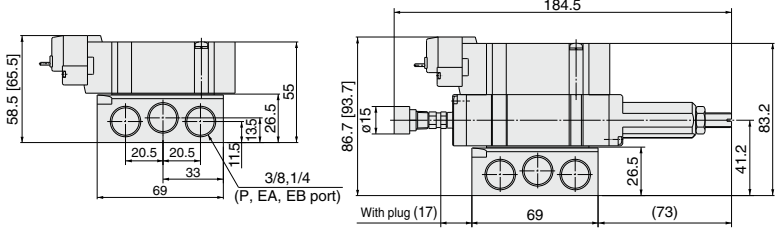


L plug connector (L):
SY7140(R)-□L□□-02□₀₃

M plug connector (M):
SY7140(R)-□M□□-02□₀₃

DIN terminal (D, Y):
SY7140(R)-□D□□-02□₀₃

M8 connector (WO):
SY7140(R)-□WO□□-02□₀₃

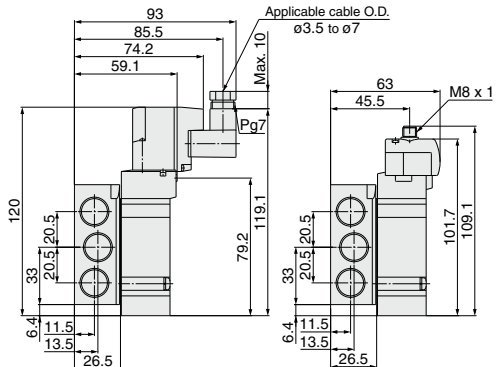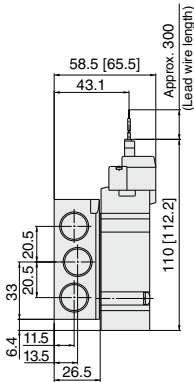

Note) Refer to page 642 for dimensions of connector types.


| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Dimensions: SY7000 Series


[] : AC

3 position closed center / exhaust center / pressure center


Grommet (G), (H): SY7³/₅40(R)-□G□□.02□□
 □H□□.03□□

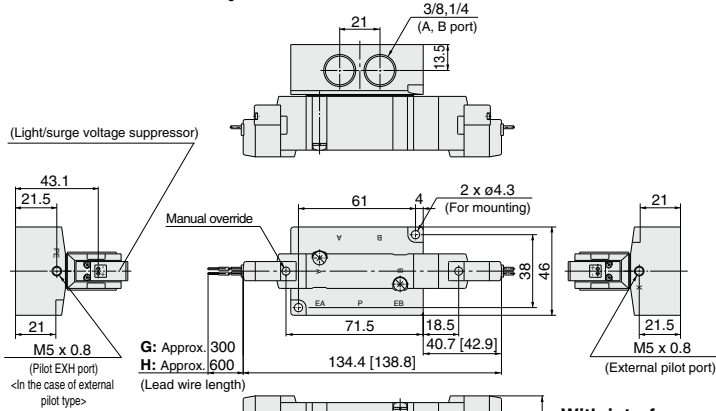


L plug connector (L):
 SY7³/₅40(R)-□L□□.02□□

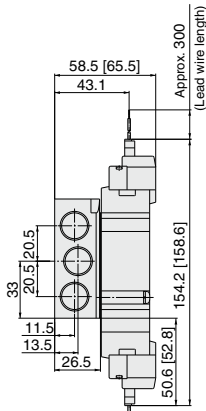


M plug connector (M):
 SY7³/₅40(R)-□M□□.02□□

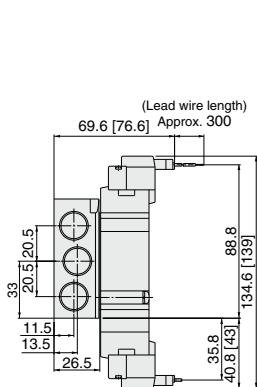

DIN terminal (D, Y):
 SY7³/₅40(R)-□Y□□.02□□

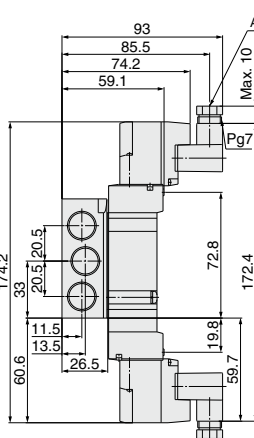

M8 connector (WO):
 SY7³/₅40(R)-□WO□□.02□□

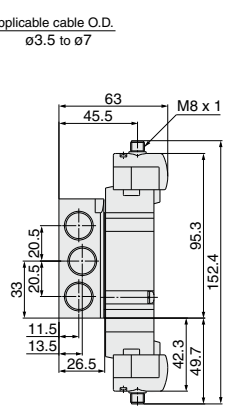

Note) Refer to page 642 for dimensions of connector types.

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |


SY3000/5000/7000/9000 Series

Dimensions: SY9000 Series

[]: AC

2 position single

Grommet (G), (H): SY9140(R)-□_G□□-03□₀₄

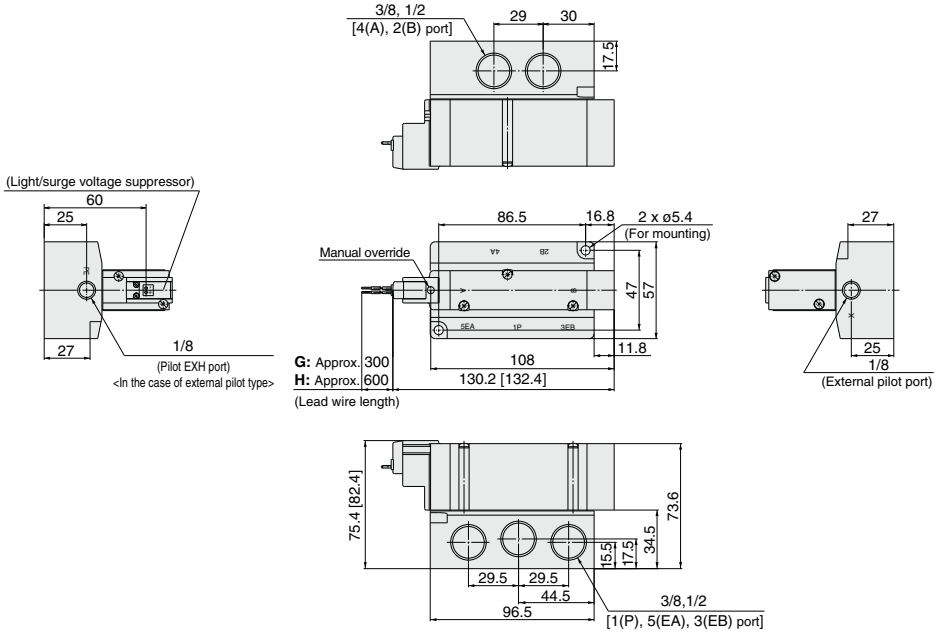


L plug connector (L):
 SY9140(R)-□L□□-03□₀₄

M plug connector (M):
 SY9140(R)-□M□□-03□₀₄

DIN terminal (D, Y):
 SY9140(R)-□D□□-03□₀₄

M8 connector (WO):
 SY9140(R)-□WO□□-03□₀₄

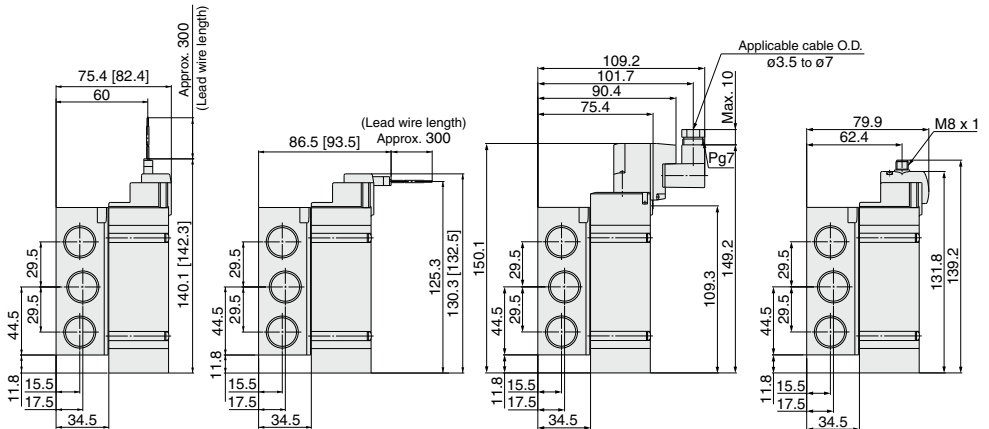


Note) Refer to page 642 for dimensions of connector types.

Dimensions: SY9000 Series

[] : AC


2 position double

Grommet (G), (H): SY9240(R)-□G□□□-03□□

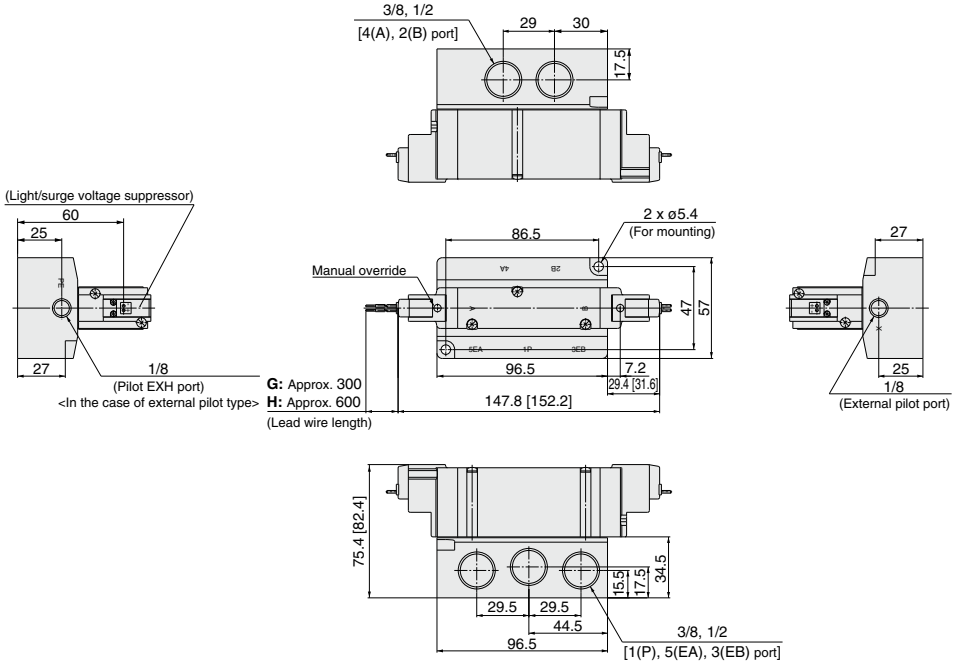


| |
|--------------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |


L plug connector (L):
SY9240(R)-□L□□□-03□□

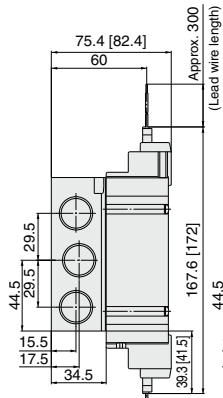


M plug connector (M):
SY9240(R)-□M□□□-03□□

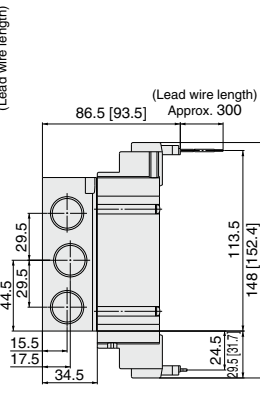

DIN terminal (D, Y):
SY9240(R)-□D□□□-03□□

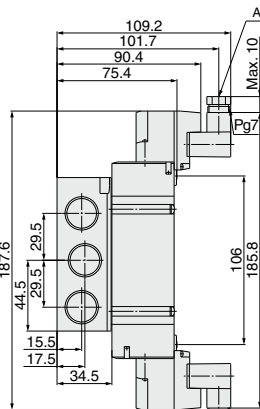

M8 connector (WO):
SY9240(R)-□WO□□□-03□□

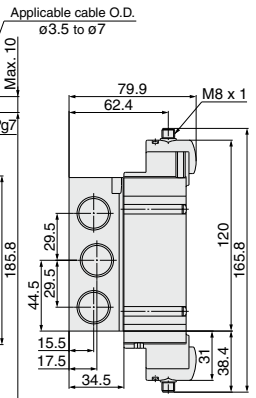

Note) Refer to page 642 for dimensions of connector types.


SY3000/5000/7000/9000 Series

Dimensions: SY9000 Series

[]: AC

3 position closed center / exhaust center / pressure center

Grommet (G), (H): SY9³/₅40(R)-□□□□-⁰³/₀₄□

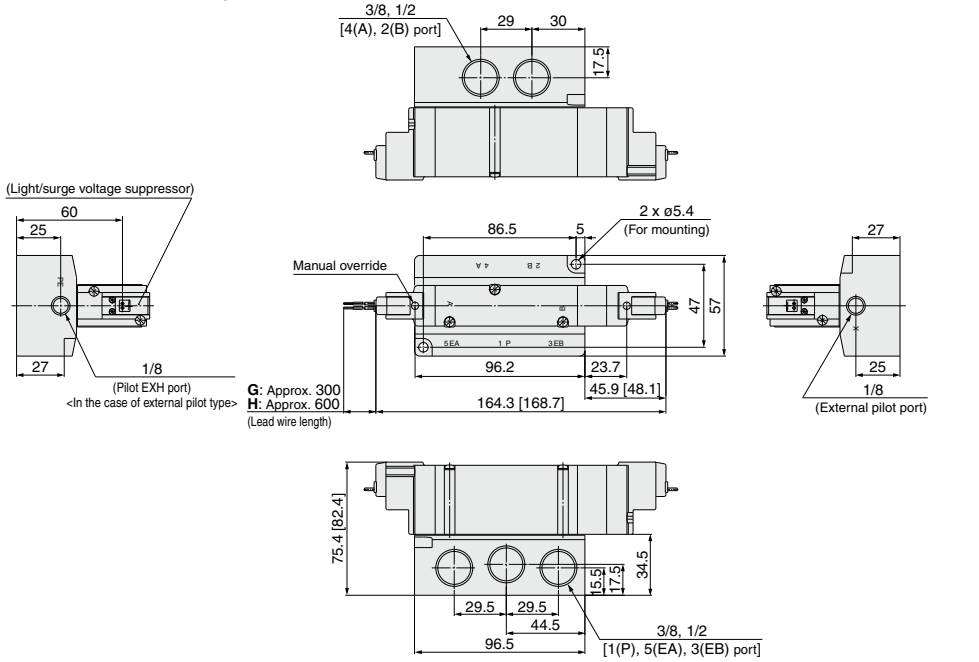


L plug connector (L):
SY9³/₅40(R)-□□□□-⁰³/₀₄□

M plug connector (M):
SY9³/₅40(R)-□M□□-⁰³/₀₄□

DIN terminal (D, Y):
SY9³/₅40(R)-□□□□-⁰³/₀₄□

M8 connector (WO):
SY9³/₅40(R)-□WO□□-⁰³/₀₄□

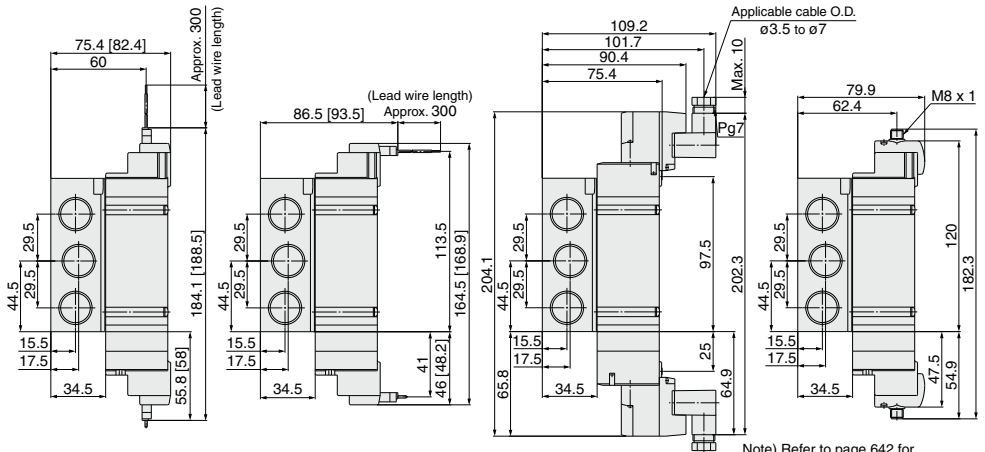

Note) Refer to page 642 for dimensions of connector types.

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

5 Port Solenoid Valve Body Ported Manifold Bar Stock Type/Individual Wiring

CE
[Option]

SY3000/5000/7000 Series

Type **20**

How to Order Manifold

SS5Y **5** - **20** - **05** - -

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Stations

| | |
|----|-------------|
| 02 | 2 stations |
| ⋮ | ⋮ |
| 20 | 20 stations |

* This also includes the number of blanking plate assemblies.

Thread type

| | |
|-----|------|
| NII | Rc |
| 00F | G |
| 00N | NPT |
| 00T | NPTF |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |


Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Manifold Assembly (Example)

Example

Cylinder port size

C6: With One-touch fitting for ø6

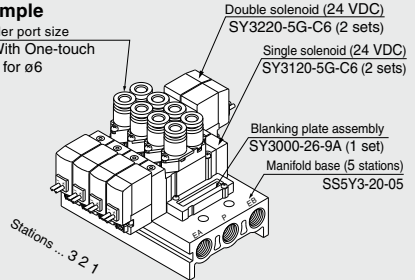

SS5Y3-20-05 1 set (Type 20, 5-station manifold base part no.)

* SY3000-26-9A 1 set (Blanking plate assembly part no.)

* SY3120-5G-C6 ... 2 sets (Single solenoid part no.)

* SY3220-5G-C6 ... 2 sets (Double solenoid part no.)

↳ The asterisk denotes the symbol for assembly.

Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Valve

SY 5 1 20 - 5 L - 01

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.

* For type W□, DC voltage is only available.

Note) AC-type models that are CE-compliant have DIN terminals only.

For AC (50/60 Hz)

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

* For "R" and "U", DC voltage is only available.

* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

A, B port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |

One-touch fitting (Metric size)


| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø3/8" | SY3000 |
| N7 | One-touch fitting for ø1/4" | SY3000 |
| N3 | One-touch fitting for ø3/8" | SY5000 |
| N7 | One-touch fitting for ø1/4" | SY5000 |
| N9 | One-touch fitting for ø9/16" | SY5000 |
| N9 | One-touch fitting for ø9/16" | SY7000 |
| N11 | One-touch fitting for ø3/8" | SY7000 |

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

Gasket assembly part no.



| Series | Gasket assembly part no. |
|--------|--------------------------|
| SY3000 | SY3000-GS-1 |
| SY5000 | SY5000-GS-1 |
| SY7000 | SY7000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

Electrical entry

| | Series | 24, 12, 6, 5, 3 VDC/ 100, 110, 200, 220 VAC | | | 24, 12 VDC/ 100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC |
|-------------------|--------|--|------------------|------------------|--|---------------------|
| | | Grommet | L plug connector | M plug connector | DIN terminal (SY5000/7000 only) | M8 connector |
| Manifold mounting | SY3000 | ● | ● | ● | ● | ● |
| | SY5000 | ● | ● | ● | ● | ● |
| | SY7000 | ● | ● | ● | ● | ● |
| CE-compliant | DC | ● | ● | ● | ● | ● |
| | AC | — | — | — | ● | — |

Note 1) The DIN terminal of the SY3000 series cannot be mounted on a standard manifold. For details, refer to page 639.

Note 2) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

* LN, MN type: with 2 sockets.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN438650C).


* For details, refer to page 638.

* For connector cable of M8 connector, refer to page 641.

* M8 thread conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.



Manifold Specifications

| Model | SS5Y3-20(-Q) | SS5Y5-20(-Q) | SS5Y7-20(-Q) | |
|----------------------------|------------------------------------|--|--|---|
| Applicable valve | SY3□20 | SY5□20 | SY7□20 | |
| Manifold type | Single base/B mount | | | |
| P (SUP)/R (EXH) | Common SUP, Common EXH | | | |
| Valve stations | 2 to 20 stations ^{Note1)} | | | |
| A, B port location | Valve | | | |
| Port size | P, EA, EB port | 1/8 | 1/4 | 1/4 |
| | A, B port | M5 x 0.8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | 1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | 1/4 C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) |
| Manifold base weight W (g) | W = 13n + 24 | W = 36n + 64 | W = 43n + 35 | |
| n: Stations | | | | |

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 467.

Flow Rate Characteristics


| Model | Port size | | Flow rate characteristics | | | | | |
|--------------|------------------------|----------------|------------------------------|------|------|------------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /(s·bar)) | b | Cv | C (dm ³ /(s·bar)) | b | Cv |
| SS5Y3-20(-Q) | 1/8 | C6 | 0.72 | 0.29 | 0.18 | 0.80 | 0.36 | 0.21 |
| SS5Y5-20(-Q) | 1/4 | C8 | 1.9 | 0.28 | 0.48 | 2.2 | 0.20 | 0.53 |
| SS5Y7-20(-Q) | 1/4 | C10 | 3.6 | 0.31 | 0.93 | 3.6 | 0.27 | 0.88 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

SY3000: SS5Y3-20-Stations - []


[] : AC

Grommet (G)

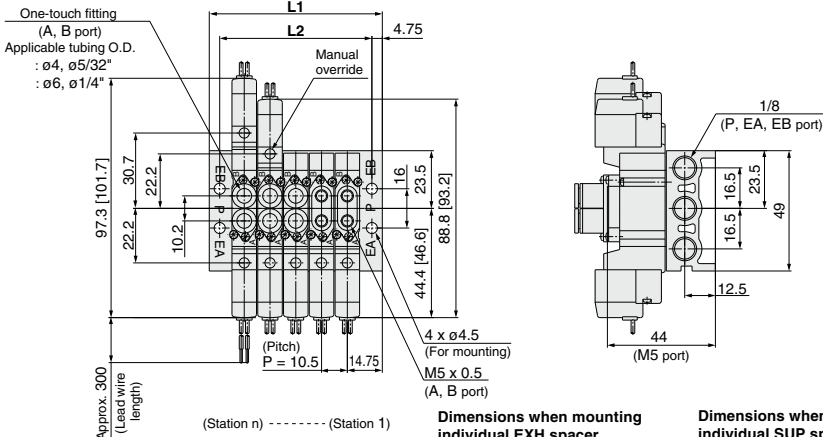


SJ
SY
SY
S0700
S0700


L plug connector (L)

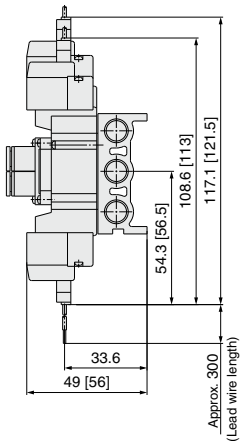

M plug connector (M)

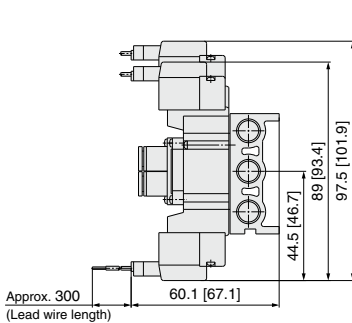

M8 connector (WO)

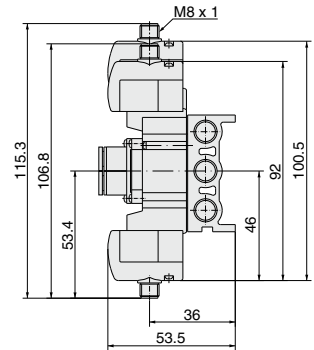



Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 40 | 50.5 | 61 | 71.5 | 82 | 92.5 | 103 | 113.5 | 124 | 134.5 | 145 | 155.5 | 166 | 176.5 | 187 | 197.5 | 208 | 218.5 | 229 |
| L2 | 30.5 | 41 | 51.5 | 62 | 72.5 | 83 | 93.5 | 104 | 114.5 | 125 | 135.5 | 146 | 156.5 | 167 | 177.5 | 188 | 198.5 | 209 | 219.5 |

SY5000: SS5Y5-20- Stations -

[] : AC




Grommet (G)

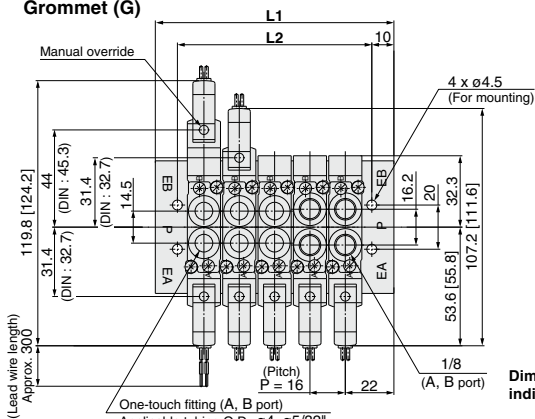

Dimensions when mounting individual EXH spacer

Dimensions when mounting individual SUP spacer

(SUP port is at the end plate of single solenoid.)


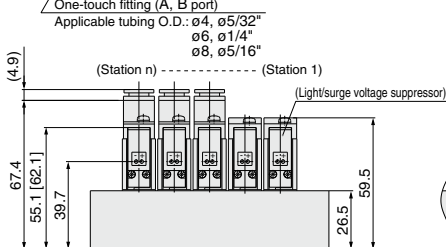


L plug connector (L)



M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)



Approx. 300 (Lead wire length)

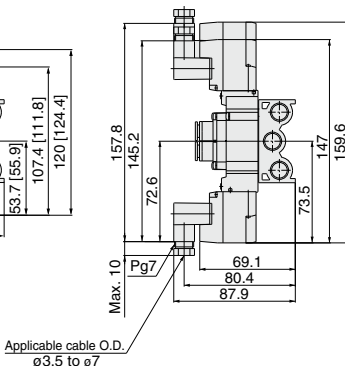


Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| L1 | 60 | 76 | 92 | 108 | 124 | 140 | 156 | 172 | 188 | 204 | 220 | 236 | 252 | 268 | 284 | 300 | 316 | 332 | 348 |
| L2 | 40 | 56 | 72 | 88 | 104 | 120 | 136 | 152 | 168 | 184 | 200 | 216 | 232 | 248 | 264 | 280 | 296 | 312 | 328 |

SY7000: SS5Y7-20-Stations -




[] : AC

Grommet (G)

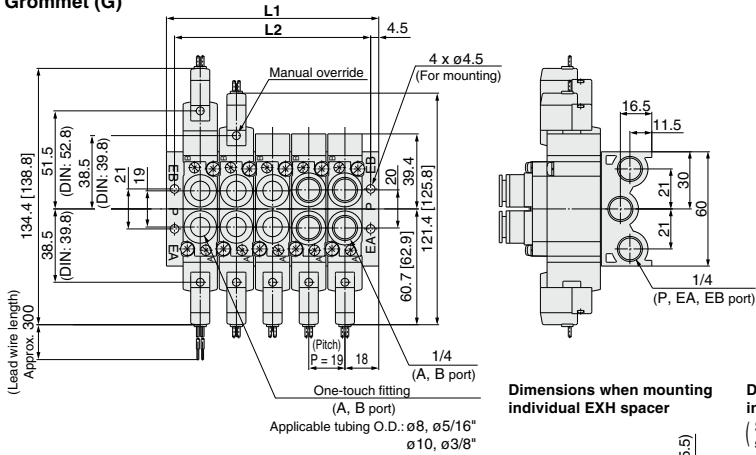

Dimensions when mounting individual EXH spacer

Dimensions when mounting individual SUP spacer
(SUP port is at the end plate of single solenoid.)




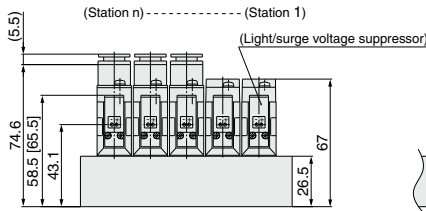


L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

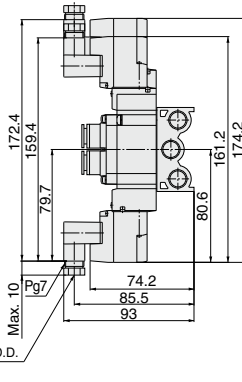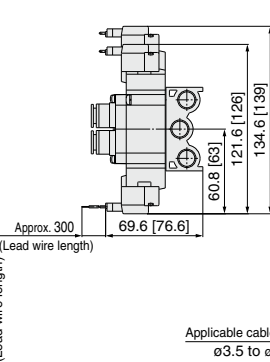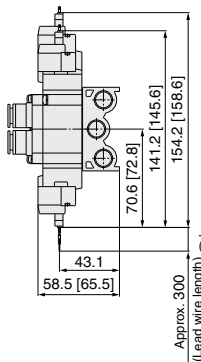

Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| L1 | 55 | 74 | 93 | 112 | 131 | 150 | 169 | 188 | 207 | 226 | 245 | 264 | 283 | 302 | 321 | 340 | 359 | 378 | 397 |
| L2 | 46 | 65 | 84 | 103 | 122 | 141 | 160 | 179 | 198 | 217 | 236 | 255 | 274 | 293 | 312 | 331 | 350 | 369 | 388 |

5 Port Solenoid Valve Body Ported Manifold Stacking Type/Individual Wiring

SY9000 Series

Type **23**

CE
[Option]

How to Order Manifold

Type 23/External pilot capable

SS5Y9-23-05 - [] - [] - []

| | |
|-----------------|----------|
| Manifold series | 9 SY9000 |
|-----------------|----------|

Valve stations

| Symbol | Stations |
|--------|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

* This also includes the number of blanking plate assemblies.

Thread type

| Nil | Rc |
|-----|------|
| 00F | G |
| 00N | NPT |
| 00T | NPTF |

Option

| Symbol | Mounting |
|--------|---|
| Nil | Direct mounting |
| D | DIN rail mounting (with DIN rail) |
| DO | DIN rail mounting (without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |


CE-compliant

| Nil | — |
|-----|--------------|
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Manifold Assembly (Example)

Example

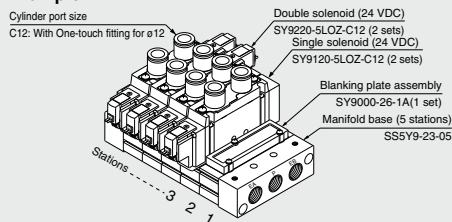

- SS5Y9-23-05 1 set (Type 23, 5-station manifold base part no.)
 * SY9000-26-1A 1 set (Blanking plate assembly part no.)
 * SY9120-5LOZ-C12 ... 2 sets (Single solenoid part no.)
 * SY9220-5LOZ-C12 ... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

[Option]

How to Order Valve

SY 9 1 20 - **5 L** - **02**

Series

| | |
|---|--------|
| 9 | SY9000 |
|---|--------|

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot specifications

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

* In the case of external pilot specifications, it cannot be used as a single unit.

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| For DC | For AC (%/50 Hz) |
|--------|------------------|
| 5 | 1 |
| 6 | 2 |
| V | 3 |
| S | 4 |
| R | |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.
Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

A, B port size Thread piping

| Symbol | Port size |
|--------|-----------|
| 02 | 1/4 |
| 03 | 3/8 |

One-touch fitting (Metric size)

| Symbol | Port size |
|--------|---------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| C12 | One-touch fitting for ø12 |

One-touch fitting (Inch size)

| Symbol | Port size |
|--------|------------------------------|
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

SJ
SY
SY
S0700
S0700


Electrical entry

| 24, 12, 6, 5, 3 VDC/ 100, 110, 200, 220 VAC | | | 24, 12 VDC/ 100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC |
|--|---|---|--|--|
| Grommet | L plug connector | M plug connector | DIN terminal | M8 connector |
| G: Lead wire length 300 mm H: Lead wire length 600 mm | L: With lead wire (Length 300 mm) LN: Without lead wire LO: Without connector | M: With lead wire (Length 300 mm) MN: Without lead wire MO: Without connector | D: With connector DC: Without connector Y: With connector YO: Without connector | WC: Without connector cable W□: With connector cable (Note) |
| CE-compliant | DC ● AC — | ● — | ● — | ● — |

- * LN, MN type: with 2 sockets.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.
- * For connector cable of M8 connector, refer to page 641.
- * M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.
- * Refer to page 638 for the lead wire length of L and M plug connectors.
- * Refer to page 639 for the connector assembly with cover for L and M plug connectors.
- Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.


Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

Gasket assembly part no.



| | |
|--------|--------------------------|
| Series | Gasket assembly part no. |
| SY9000 | SY9000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.



Manifold Specifications

| | | |
|---|-------------------------------------|---|
| Model | SS5Y9-23(-Q) | |
| Applicable valve | SY9□20 | |
| Manifold type | Stacking type | |
| P (SUP)/R (EXH) | Common SUP, Common EXH | |
| Valve stations | 2 to 20 stations ^{Note 1)} | |
| A, B port location | Valve | |
| Port size | P, EA, EB port | 3/8 |
| | A, B port | 1/4 |
| | | 3/8 |
| | | C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12) |
| Manifold base weight W (g) n: Stations | W = 66n + 246 | |

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 467.

Flow Rate Characteristics


| Model | Port size | | Flow rate characteristics | | | | | |
|---------------------|------------------------|----------------|----------------------------|------|-----|----------------------------|------|-----|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s·bar) | b | Cv | C (dm ³ /s·bar) | b | Cv |
| SS5Y9-23(-Q) | 3/8 | C12 | 6.3 | 0.20 | 1.5 | 8.2 | 0.28 | 1.9 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

SY9000: SS5Y9-23- Stations -(D)

[] : AC

Grommet (G)

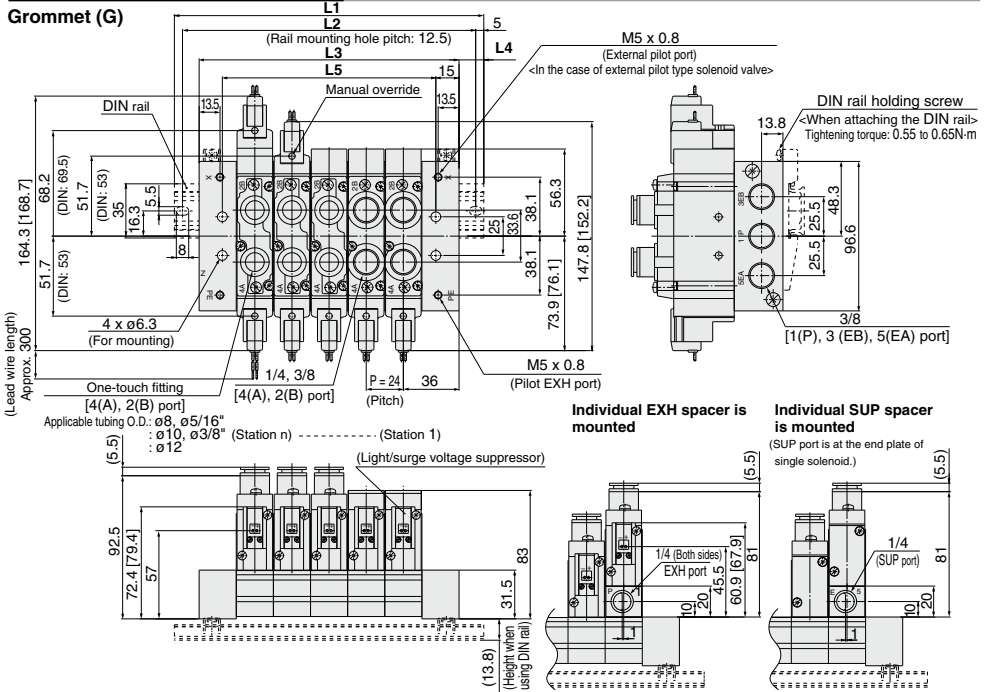


- SJ**
- SY**
- SY**
- S0700**
- S0700**

L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

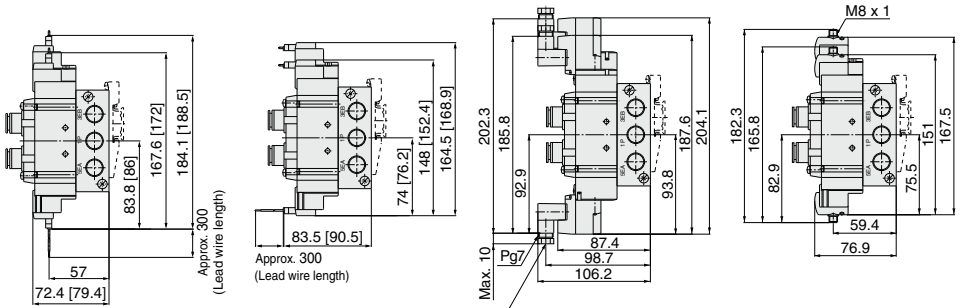

Applicable cable O.D. $\phi 3.5$ to $\phi 7$

Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 123 | 148 | 173 | 198 | 223 | 248 | 273 | 298 | 323 | 335.5 | 360.5 | 385.5 | 410.5 | 435.5 | 460.5 | 485.5 | 510.5 | 535.5 | 560.5 |
| L2 | 112.5 | 137.5 | 162.5 | 187.5 | 212.5 | 237.5 | 262.5 | 287.5 | 312.5 | 325 | 350 | 375 | 400 | 425 | 450 | 475 | 500 | 525 | 550 |
| L3 | 96 | 120 | 144 | 168 | 192 | 216 | 240 | 264 | 288 | 312 | 336 | 360 | 384 | 408 | 432 | 456 | 480 | 504 | 528 |
| L4 | 13.5 | 14 | 14.5 | 15 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 | 14 | 14.5 | 15 | 15.5 | 16 | 16.5 |
| L5 | 66 | 90 | 114 | 138 | 162 | 186 | 210 | 234 | 258 | 282 | 306 | 330 | 354 | 378 | 402 | 426 | 450 | 474 | 498 |

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

Type **20P**

5 Port Solenoid Valve Body Ported Manifold Bar Stock Type/Flat Ribbon Cable **SY3000/5000/7000 Series**

How to Order Manifold

Note) CE-compliant:
For DC only. [Option]



SS5Y **5** - 20P - **05** - [] - []

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Stations

| | |
|----|-------------|
| 03 | 3 stations |
| : | : |
| 12 | 12 stations |

Note) SS5Y3 has 4 to 12 stations.

Thread type

| | |
|-----|------|
| Nil | Rc |
| 00F | G |
| 00N | NPT |
| 00T | NPTF |


CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) CE-compliant: For DC only.

How to Order Manifold Assembly (Example)

Example

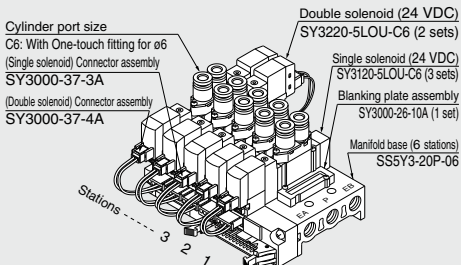

- SS5Y3-20P-06 1 set (Type 20P, 6-station manifold part no.)
- * SX3000-26-10A 1 set (Blanking plate assembly part no.)
 - * SY3120-5LOU-C6... 3 sets (Single solenoid part no.)
 - * SY3220-5LOU-C6... 2 sets (Double solenoid part no.)
 - * SY3000-37-3A..... 3 sets (Connector assembly part no.)
 - * SY3000-37-4A..... 2 sets (Connector assembly part no.)
- The asterisk denotes the symbol for assembly.
Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. below that connects the valve and the manifold.

Connector Assembly

For 12, 24 VDC

| Specifications | For SY3000 | For SY5000/7000 |
|---|--------------|-----------------|
| For single solenoid | SY3000-37-3A | SY5000-37-3A |
| Double solenoid, 3 position type | SY3000-37-4A | SY5000-37-4A |
| Single with spacer assembly | SY5000-37-3A | SY5000-37-5A |
| Double, 3 position with spacer assembly | SY3000-37-6A | SY5000-37-6A |

Note) Spacer assembly indicates Individual SUP/EXH.

For 100 VAC

| Specifications | For SY3000 | For SY5000/7000 |
|---|---------------|-----------------|
| For single solenoid | SY3000-37-32A | SY5000-37-15A |
| Double solenoid, 3 position type | SY3000-37-33A | SY5000-37-16A |
| Single with spacer assembly | SY5000-37-15A | SY5000-37-17A |
| Double, 3 position with spacer assembly | SY3000-37-34A | SY5000-37-18A |

For 100 VAC (115 VAC)

| Specifications | For SY3000 | For SY5000/7000 |
|---|---------------|-----------------|
| For single solenoid | SY3000-37-35A | SY5000-37-19A |
| Double solenoid, 3 position type | SY3000-37-36A | SY5000-37-20A |
| Single with spacer assembly | SY5000-37-19A | SY5000-37-21A |
| Double, 3 position with spacer assembly | SY3000-37-37A | SY5000-37-22A |

⚠Caution

- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



How to Order Valve

Note) CE-compliant:
For DC only. [Option]

•Coil specifications

| | |
|-----|---------------------------|
| Nil | Standard |
| T | With power saving circuit |

•Rated voltage CE-compliant

| | | |
|---|--------|---|
| 5 | 24 VDC | ● |
| 6 | 12 VDC | ● |

•Light/surge voltage suppressor

| | |
|---|--|
| Z | With light/surge voltage suppressor |
| U | With light/surge voltage suppressor (Non-polar type) |

Note) Z: Positive common specifications only.
* Power saving circuit is only available in the "Z" type.

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" for DC is positive common specifications only. For the other combination, please contact SMC.

For DC: SY **5** **1** **20** **5** **LO** **Z** **01**

For AC: SY **5** **1** **20** **1** **LO** **Z** **01**

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

•Rated voltage CE-compliant

| | | |
|---|-------------------|---|
| 1 | 100 VAC | — |
| 3 | 110 VAC (115 VAC) | — |

Note) CE-compliant: For DC only.

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

•Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

•A, B port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |


One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|-----------------------------|-------------------|
| N3 | One-touch fitting for ø3/8" | SY3000 |
| N7 | One-touch fitting for ø1/4" | SY3000 |
| N3 | One-touch fitting for ø3/8" | SY5000 |
| N7 | One-touch fitting for ø1/4" | SY5000 |
| N9 | One-touch fitting for ø3/8" | SY7000 |
| N9 | One-touch fitting for ø3/8" | SY7000 |
| N11 | One-touch fitting for ø3/8" | SY7000 |

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.
Note) Since the electrical entry is "LO", select a connector assembly part no. from those stated on page 448.

SY
SY
S0700
S0700

■Gasket assembly part no.




| Series | Gasket assembly part no. |
|--------|--------------------------|
| SY3000 | SY3000-GS-1 |
| SY5000 | SY5000-GS-1 |
| SY7000 | SY7000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

- Multiple valve wiring is simplified through the use of the flat cable connector
- Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Manifold Specifications

| Model | SS5Y3-20P(-Q) | SS5Y5-20P(-Q) | SS5Y7-20P(-Q) | |
|---|---|---|--|---|
| Applicable valve | SY3□20 | SY5□20 | SY7□20 | |
| Manifold type | Single base/B mount | | | |
| P (SUP/R (EXH)) | Common SUP, Common EXH | | | |
| Valve stations | 4 to 12 stations ⁽¹⁾ | 3 to 12 stations ^(Note 1) | | |
| A, B port location | Valve | | | |
| Port size | P, EA, EB port | 1/8 | 1/4 | 1/4 |
| | A, B port | M5 x 0.8, C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | 1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | 1/4 C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) |
| Manifold base weight W (g) n: Stations | W = 19n + 45 | W = 43n + 77 | W = 51n + 81 | |
| Applicable flat ribbon cable connector | Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503 | | | |
| Internal wiring | In common between +COM and -COM (Z type: +COM only). | | | |
| Rated voltage ^(Note 4) | 12, 24 VDC 100, 110 VAC | | | |

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 467.


Note 4) CE-compliant: For DC only.

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|-----------|------------------------|----------------|------------------------------|------|------|------------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv |
| SS5Y3-20P | 1/8 | C6 | 0.72 | 0.29 | 0.18 | 0.80 | 0.36 | 0.21 |
| SS5Y5-20P | 1/4 | C8 | 1.9 | 0.28 | 0.48 | 2.2 | 0.20 | 0.53 |
| SS5Y7-20P | 1/4 | C10 | 3.6 | 0.31 | 0.93 | 3.6 | 0.27 | 0.88 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


Internal Wiring of Manifold

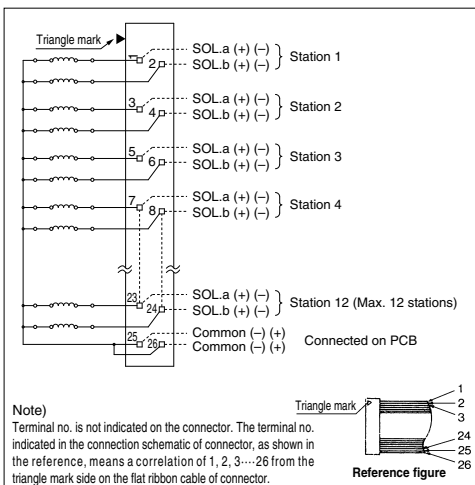

Caution



- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.

- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.



SY3000: SS5Y3-20P- Stations

[]: AC


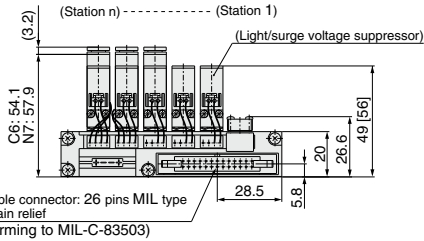
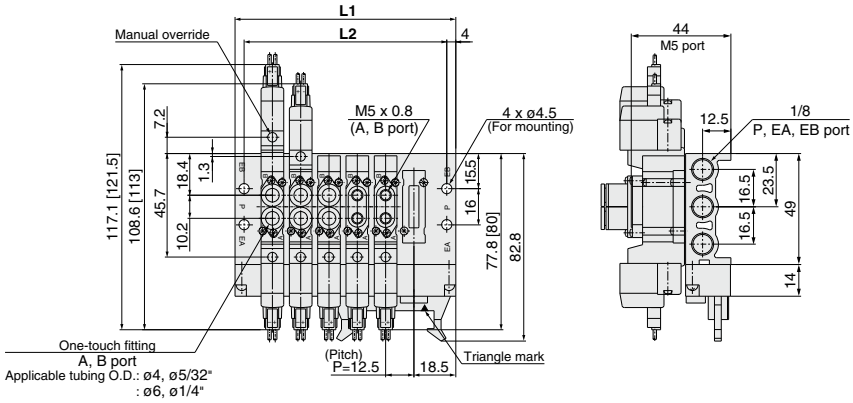


| Stations n | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|------|----|------|-----|-------|-----|-------|-----|-------|
| L1 | 72.5 | 85 | 97.5 | 110 | 122.5 | 135 | 147.5 | 160 | 172.5 |
| L2 | 64.5 | 77 | 89.5 | 102 | 114.5 | 127 | 139.5 | 152 | 164.5 |

SJ
SY
SY
S0700
S0700

SY5000: SS5Y5-20P-Stations



[]: AC

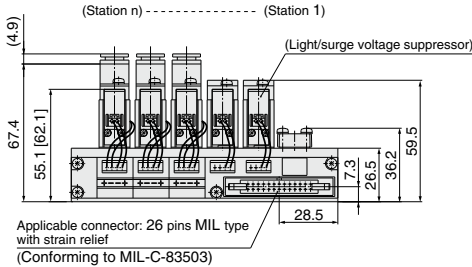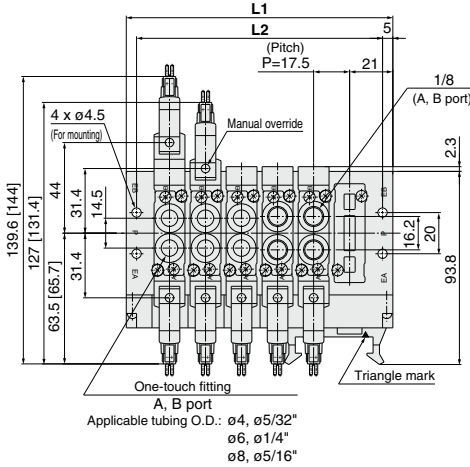

| Stations n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| L1 | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 |
| L2 | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 |

SY7000: SS5Y7-20P- Stations

[] : AC

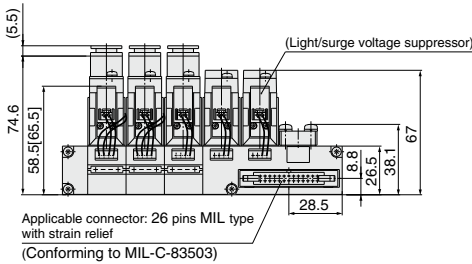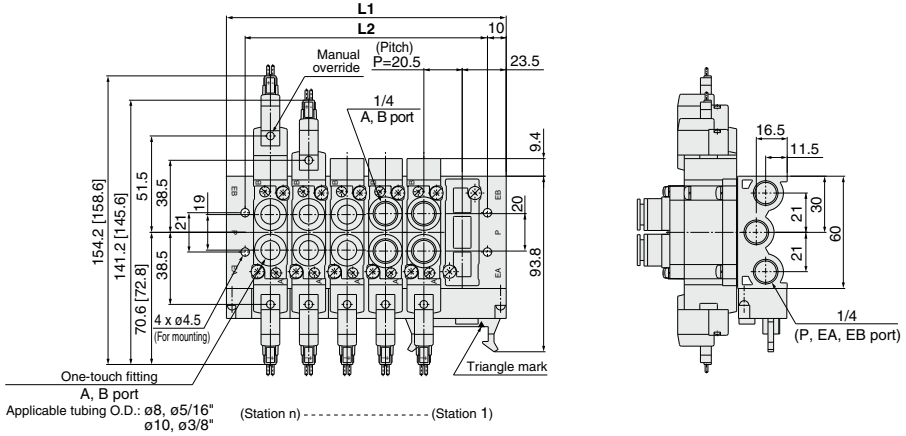

| Stations n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| L1 | 88 | 108.5 | 129 | 149.5 | 170 | 190.5 | 211 | 231.5 | 252 | 272.5 |
| L2 | 68 | 88.5 | 109 | 129.5 | 150 | 170.5 | 191 | 211.5 | 232 | 252.5 |

5 Port Solenoid Valve Body Ported Manifold Stacking Type/Flat Ribbon Cable

Type **23P**

SY9000 Series

Note) CE-compliant:
For DC only. [Option]



How to Order Manifold

Type 23P/Common external pilot capable

SS5Y 9 - 23P - 05 - [] - [] - []

Manifold series
9 SY9000

Valve stations

| Symbol | Stations |
|--------|-------------|
| 04 | 4 stations |
| : | : |
| 12 | 12 stations |

* This also includes the number of blanking plate assemblies.

Thread type

| | |
|-----|------|
| NII | Rc |
| 00F | G |
| 00N | NPT |
| 00T | NPTF |

Option

| Symbol | Mounting |
|--------|---|
| NII | Direct mounting |
| D | DIN rail mounting (with DIN rail) |
| DO | DIN rail mounting (without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |


CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Note) CE-compliant: For DC only.

How to Order Manifold Assembly (Example)

Example

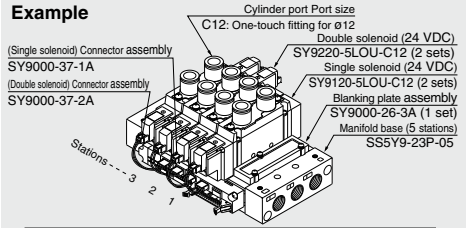

SS5Y9-23P-05 1 set (Type 23, 5-station manifold base part no.)
 *SY9000-26-3A 1 set (Blanking plate assembly part no.)
 *SY9120-SLOU-C12 ... 2 sets (Single solenoid part no.)
 *SY9220-SLOU-C12 ... 2 sets (Double solenoid part no.)
 *SY9000-37-1A 2 sets (Connector assembly part no.)
 *SY9000-37-2A 2 sets (Connector assembly part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 455) that connects the valve and the manifold.

How to Order Valve

Coil specifications

| | |
|-----|---------------------------|
| NII | Standard |
| T | With power saving circuit |

Rated voltage

| | Rated voltage | CE-compliant |
|---|---------------|--------------|
| 5 | 24 VDC | ● |
| 6 | 12 VDC | ● |

Light/Surge voltage suppressor

| | | |
|---|--|---|
| Z | With light/surge voltage suppressor | Note) Z: Positive common specifications only. |
| U | With light/surge voltage suppressor (Non-polar type) | * Power saving circuit is only available in the "Z" type. |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Note) CE-compliant: For DC only.

Thread type

| | |
|-----|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

One-touch fitting (Metric size)

| Symbol | Port size |
|--------|-----------|
| 02 | 1/4 |
| 03 | 3/8 |

One-touch fitting (Inch size)

| Symbol | Port size |
|--------|------------------------------|
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

Light/Surge voltage suppressor

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" type for DC is positive common specification only. For the other combination, please contact SMC.

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

Note) Since the electrical entry is "LO", select a connector assembly part no. from those stated on page 455.

For DC: SY 9 1 20 [] [] - 5 LO Z [] - 02 [] - []

For AC: SY 9 1 20 [] [] - 1 LO Z [] - 02 [] - []

Series

9 SY9000

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot specifications

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

* Type 23P manifolds can be used for both internal and external pilots.

Rated voltage

| | Rated voltage | CE-compliant |
|---|-------------------|--------------|
| 1 | 100 VAC | — |
| 3 | 110 VAC (115 VAC) | — |

Note) CE-compliant: For DC only.

Manual override

| | |
|-----|--------------------------------|
| NII | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

■ Gasket assembly part no.


Round head combination screw

| Series | Gasket assembly part no. |
|--------|--------------------------|
| SY9000 | SY9000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

- Multiple valve wiring is simplified through the use of the flat cable connector.
- Clean appearance

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Manifold Specifications

| | | |
|--|--|---|
| Model | SS5Y9-23P(-Q) | |
| Applicable valve | SY9□20 | |
| Manifold type | Stacking type | |
| P (SUP)/R (EXH) | Common SUP, Common EXH | |
| Valve stations | 4 to 12 stations ^{Note1)} | |
| A, B port location | Valve | |
| Port size | P, EA, EB port | 3/8 |
| | A, B port | 1/4 |
| | | 3/8 |
| | | C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12) |
| Manifold base weight W (g) | W = 73n + 259 | |
| n: Stations | | |
| Applicable flat ribbon cable connector | Flat ribbon cable connector, Socket: 26 pins MIL with strain relief, Conforming to MIL-C-83503 | |
| Internal wiring | In common between +COM and -COM (Z type: +COM only) | |
| Rated voltage ^{Note4)} | 12, 24 VDC, 100, 110 VAC | |

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.
 Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.
 Note 3) Refer to "Manifold Option" on page 467.
 Note 4) CE-compliant: For DC only.

Connector Assembly

For 12, 24 VDC

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1A |
| Double solenoid 3 position | SY9000-37-2A |
| Single with spacer assembly | SY9000-37-3A |
| Double, 3 position with spacer assembly | SY9000-37-4A |

For 100 VAC

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1B |
| Double solenoid 3 position | SY9000-37-2B |
| Single with spacer assembly | SY9000-37-3B |
| Double, 3 position with spacer assembly | SY9000-37-4B |

For 110 VAC (115 VAC)

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1C |
| Double solenoid 3 position | SY9000-37-2C |
| Single with spacer assembly | SY9000-37-3C |
| Double, 3 position with spacer assembly | SY9000-37-4C |


Note) Spacer assembly indicates individual SUP/EXH.

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|---------------|------------------------|----------------|----------------------------|------|-----|----------------------------|------|-----|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s/bar) | b | Cv | C (dm ³ /s/bar) | b | Cv |
| SS5Y9-23P(-Q) | 3/8 | C12 | 6.3 | 0.20 | 1.5 | 8.2 | 0.28 | 1.9 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


Internal Wiring of Manifold

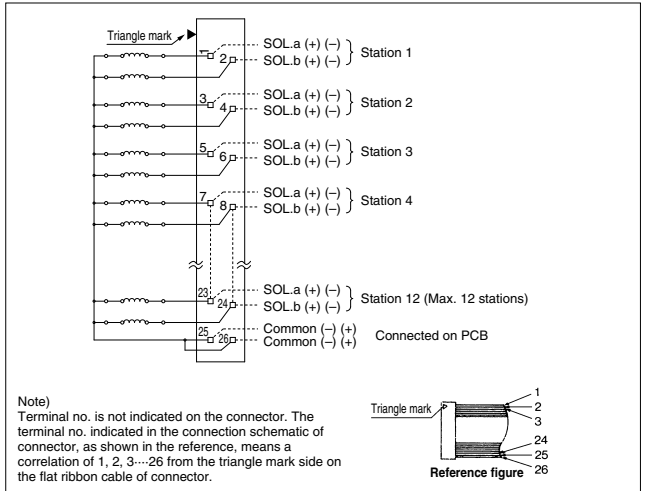

- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.

Caution



- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.



SY9000: SS5Y9-23P- Stations -(D)

[] : AC

Grommet (G)

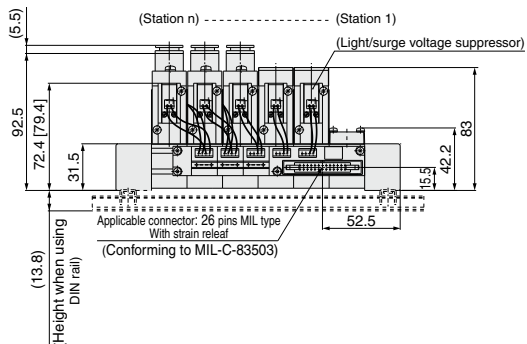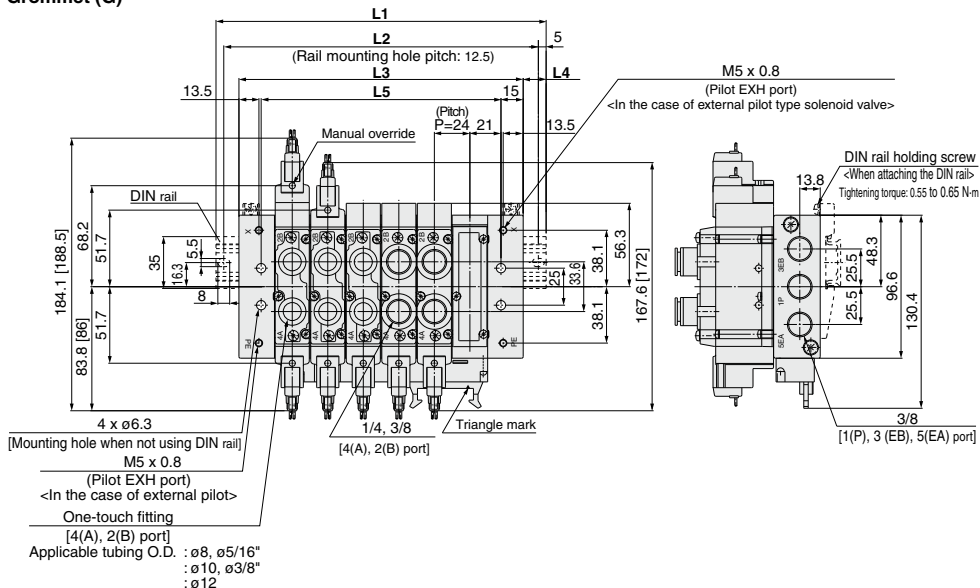

| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 198 | 223 | 248 | 273 | 298 | 323 | 335.5 | 360.5 |
| L2 | 162.5 | 187.5 | 212.5 | 237.5 | 262.5 | 287.5 | 312.5 | 325 | 350 |
| L3 | 144 | 168 | 192 | 216 | 240 | 264 | 288 | 312 | 336 |
| L4 | 14.5 | 15 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 |
| L5 | 114 | 138 | 162 | 186 | 210 | 234 | 258 | 282 | 306 |

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Type **20SA**

EX510 Gateway-type Serial Transmission System Body Ported Manifold/Integrated Base **SY3000/5000/7000 Series**



How to Order Manifold

SS5Y 3 - 20SA - 04 - - -

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

SI unit

| | |
|-----|--------------------|
| NII | NPN output (+COM.) |
| N | PNP output (-COM.) |

SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|--------|------------------------|------------------|-------|
| NII | NPN output (+COM.) | EX510-S001 | P.897 |
| N | PNP output (-COM.) | EX510-S101 | |

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

P, R port thread type

| | |
|-----|------|
| NII | Rc |
| 00F | G |
| 00N | NPT |
| 00T | NPTF |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---|
| 03 | 3 stations | Double wiring ^{Note 1)} |
| : | : | |
| 08 | 8 stations | Specified layout ^{Note 2)} (Compatible with 16 solenoid valves) |
| 03 | 3 stations | |
| : | : | |
| 16 | 16 stations | |

• SSSY3 can be set from 4 stations.


• The number of the blanking plate assembly is also included.

Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

How to Order Manifold Assembly (Example)

Example

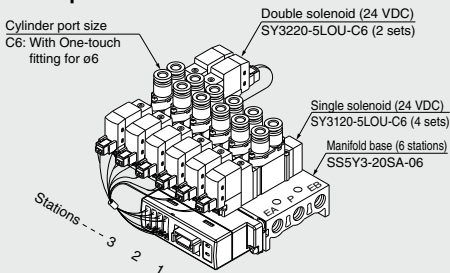

SSSY3-20SA-06 1 set (20SA type 6-station manifold part no.)
 * SY3120-5LOU-C6 4 sets (Single solenoid part no.)
 * SY3220-5LOU-C6 2 sets (Double solenoid part no.)

—The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number.

When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

How to Order Valves

SY 3 1 20 - **5 LO Z** - **M5** -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Coil specifications

| | |
|-----|---------------------------|
| Nil | Standard |
| T | With power saving circuit |

Rated voltage: 24 VDC

Light/Surge voltage suppressor

| | |
|---|--|
| Z | With light/surge voltage suppressor |
| U | With light/surge voltage suppressor (non-polar type) |

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

A, B port size

Thread piping

| | | |
|----|----------|--------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |

One-touch fitting (Metric size)


| | | |
|-----|---------------------------|--------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| | | |
|-----|------------------------------|--------|
| N3 | One-touch fitting for ø5/32" | SY3000 |
| N7 | One-touch fitting for ø1/4" | SY3000 |
| N3 | One-touch fitting for ø5/32" | SY5000 |
| N7 | One-touch fitting for ø1/4" | SY5000 |
| N9 | One-touch fitting for ø5/16" | SY5000 |
| N9 | One-touch fitting for ø5/16" | SY7000 |
| N11 | One-touch fitting for ø3/8" | SY7000 |

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

■ Gasket assembly part no.




| Series | Gasket assembly part no. |
|--------|--------------------------|
| SY3000 | SY3000-GS-1 |
| SY5000 | SY5000-GS-1 |
| SY7000 | SY7000-GS-1 |


Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

Type **20SA** **SY3000/5000/7000 Series**

SY3000: SS5Y3-20SA - Stations -

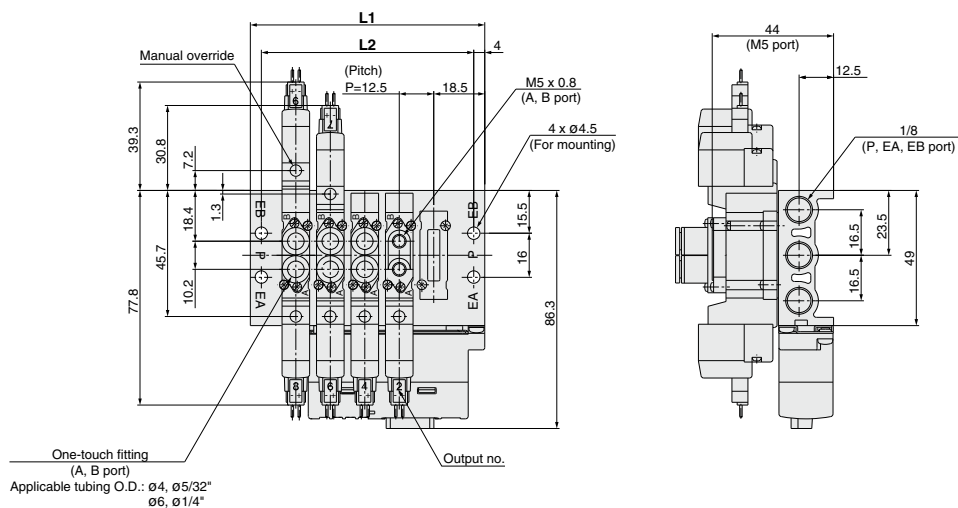


(Station n) ----- (Station 1)

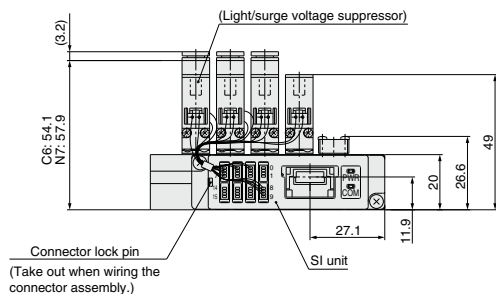


| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 72.5 | 85 | 97.5 | 110 | 122.5 | 135 | 147.5 | 160 | 172.5 | 185 | 197.5 | 210 | 222.5 |
| L2 | 64.5 | 77 | 89.5 | 102 | 114.5 | 127 | 139.5 | 152 | 164.5 | 177 | 189.5 | 202 | 214.5 |

SY5000: SS5Y5-20SA - Stations -

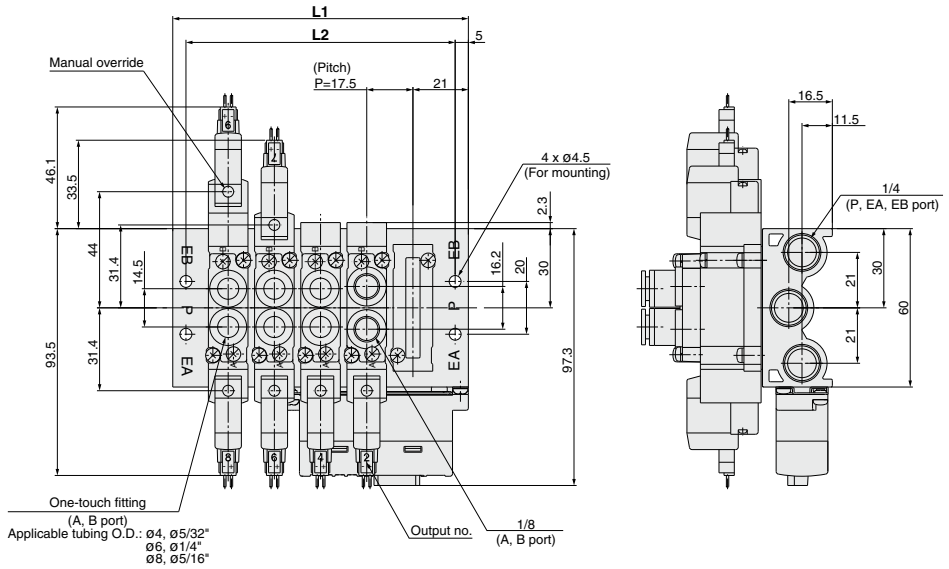


| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

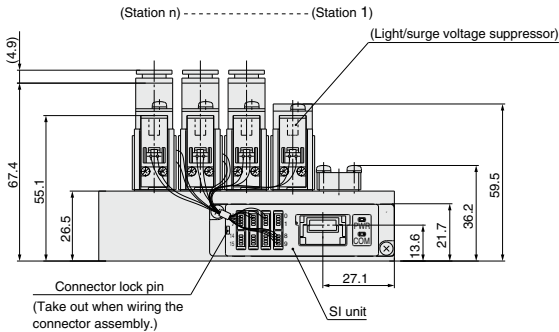


| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 | 252 | 269.5 | 287 | 304.5 |
| L2 | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 | 242 | 259.5 | 277 | 294.5 |

SY7000: SS5Y7-20SA - Stations -

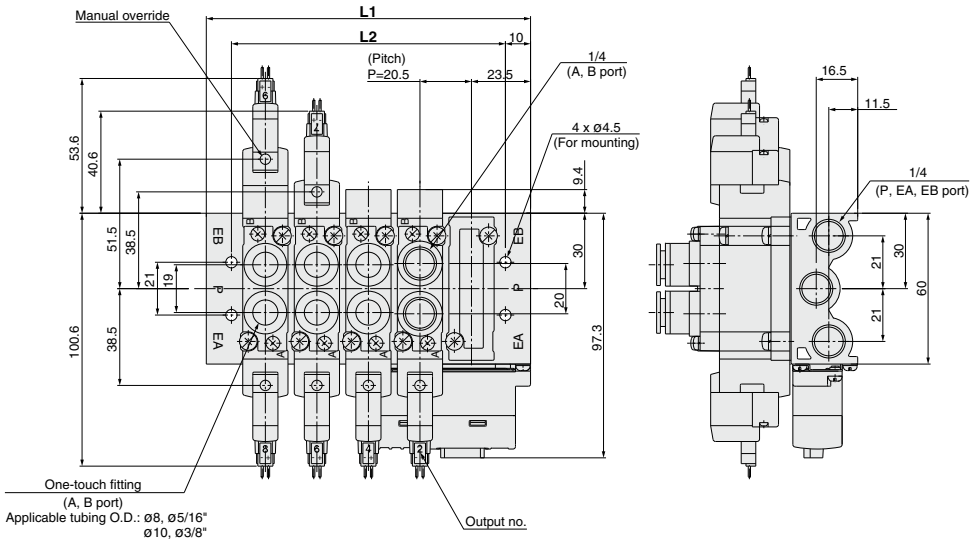

(Station n) ----- (Station 1)

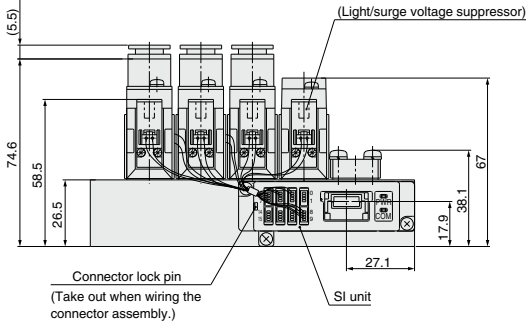

| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 88 | 108.5 | 129 | 149.5 | 170 | 190.5 | 211 | 231.5 | 252 | 272.5 | 293 | 313.5 | 334 | 354.5 |
| L2 | 68 | 88.5 | 109 | 129.5 | 150 | 170.5 | 191 | 211.5 | 232 | 252.5 | 273 | 293.5 | 314 | 334.5 |

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Type **23SA**

EX510 Gateway-type Serial Transmission System Body Ported Manifold/Stacking Type **SY9000 Series**



How to Order Manifold

SS5Y9-23SA [] - **03** - [] - [] - []

SI unit

| | |
|------------|--------------------|
| NII | NPN output (+COM.) |
| N | PNP output (-COM.) |

CE-compliant

| | |
|------------|--------------|
| NII | — |
| Q | CE-compliant |

Valve stations

| Symbol | Stations | Note |
|-----------|-------------|---|
| 03 | 3 stations | Double wiring ^{Note 1)} |
| ⋮ | ⋮ | |
| 08 | 8 stations | |
| 03 | 3 stations | Specified layout ^{Note 2)} (Compatible with 16 solenoid valves) |
| ⋮ | ⋮ | |
| 16 | 16 stations | |

- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

Option


| | |
|------------|---|
| NII | Direct mounting |
| D | DIN rail mounting (With DIN rail) |
| DO | DIN rail mounting (Without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |

P, R port thread type

| | |
|------------|------|
| NII | Rc |
| 00F | G |
| 00N | NPT |
| 00T | NPTF |

How to Order Manifold Assembly (Example)

Example

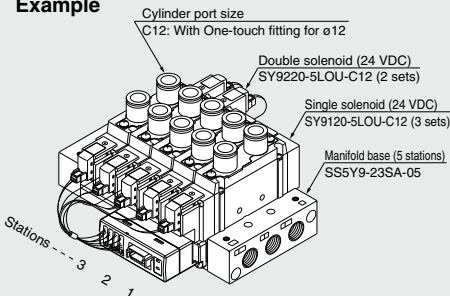

SS5Y9-23SA-05 1 set (23SA type 5-station manifold part no.)
 * **SY9120-5LOU-C12** ... 3 sets (Single solenoid part no.)
 * **SY9220-5LOU-C12** ... 2 sets (Double solenoid part no.)
 The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|------------|------------------------|------------------|-------|
| NII | NPN output (+COM.) | EX510-S001 | P.897 |
| N | PNP output (-COM.) | EX510-S101 | |

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

How to Order Valves

SY9 1 20 [] [] - 5 LO Z [] - 02 [] - []

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot specifications

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---------------------------|
| NII | Standard |
| T | With power saving circuit |

Rated voltage: 24 VDC

Light/Surge voltage suppressor

| | |
|---|--|
| Z | With light/surge voltage suppressor |
| U | With light/surge voltage suppressor (non-polar type) |

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

Manual override

| | |
|-----|--------------------------------|
| NII | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Thread type

| | |
|-----|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

A, B port size

Thread piping

| | |
|----|-----|
| 02 | 1/4 |
| 03 | 3/8 |

One-touch fitting (Metric size)

| | |
|-----|---------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| C12 | One-touch fitting for ø12 |


One-touch fitting (Inch size)

| | |
|-----|------------------------------|
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

SJ
SY
SY
S0700
S0700

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.


■ Gasket assembly part no.



| | |
|---------------|--------------------------|
| Series | Gasket assembly part no. |
| SY9000 | SY9000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

SY9000: SS5Y9-23SA - Stations - (-D)

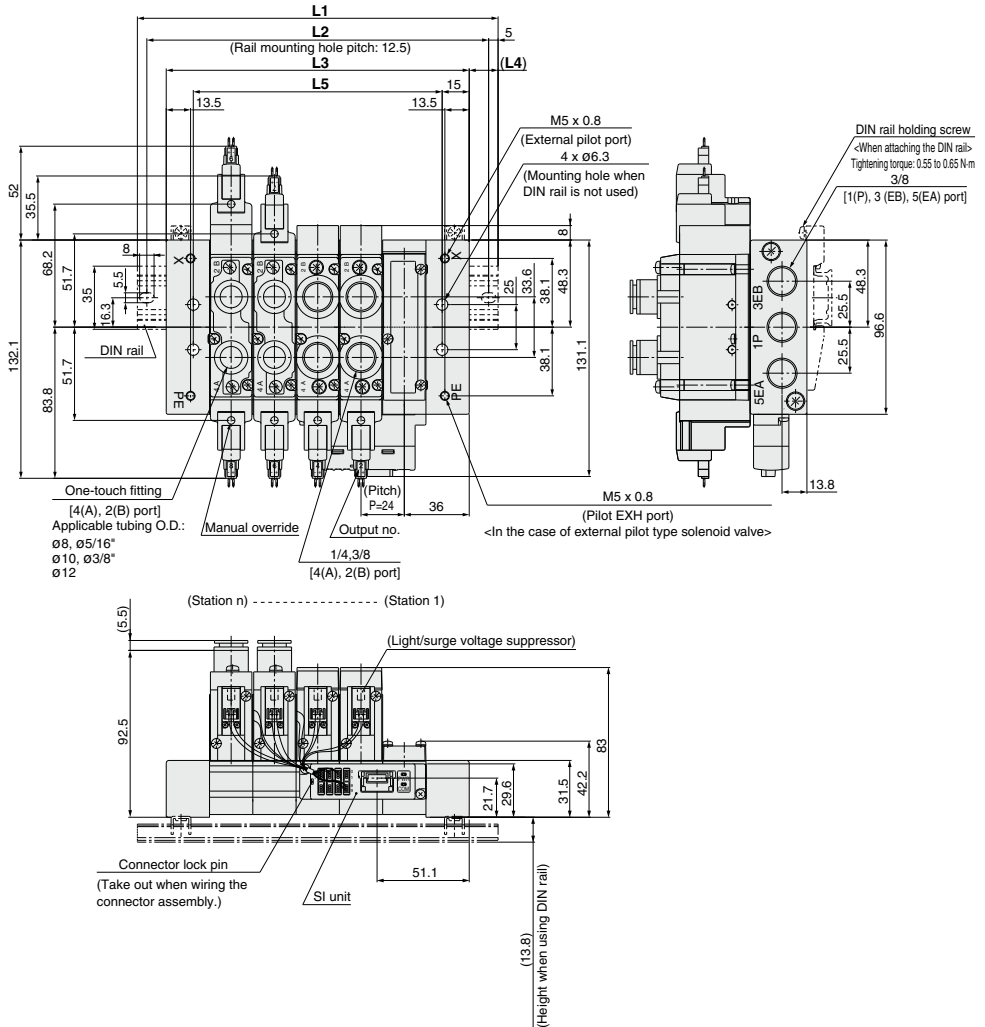


| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 198 | 223 | 248 | 273 | 298 | 323 | 335.5 | 360.5 | 385.5 | 410.5 | 435.5 | 460.5 |
| L2 | 137.5 | 162.5 | 187.5 | 212.5 | 237.5 | 262.5 | 287.5 | 312.5 | 325 | 350 | 375 | 400 | 425 | 450 |
| L3 | 120 | 144 | 168 | 192 | 216 | 240 | 264 | 288 | 312 | 336 | 360 | 384 | 408 | 432 |
| L4 | 14 | 14.5 | 15 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 | 14 | 14.5 |
| L5 | 90 | 114 | 138 | 162 | 186 | 210 | 234 | 258 | 282 | 306 | 330 | 354 | 378 | 402 |

Note) In the case of direct mounting without DIN rail, total width of manifold is L3.

Manifold Option

■ Type 20, 23, 20SA, 23SA Blanking plate assembly




<Standard>

| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-9A |
| SY5000 | SY5000-26-20A |
| SY7000 | SY7000-26-22A |
| SY9000 | SY9000-26-1A |

<CE-compliant>

| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-19A-Q |
| SY5000 | SY5000-26-1A-Q |
| SY7000 | SY7000-26-1A-Q |
| SY9000 | SY9000-26-1A-Q |

■ Type 20P, 23P Blanking plate assembly




<Standard>

| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-10A |
| SY5000 | SY5000-26-21A |
| SY7000 | SY7000-26-23A |
| SY9000 | SY9000-26-3A |

<CE-compliant>

| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-20A-Q |
| SY5000 | SY5000-26-3A-Q |
| SY7000 | SY7000-26-3A-Q |
| SY9000 | SY9000-26-3A-Q |


■ Gasket assembly part no.



| Series | Gasket assembly part no. |
|---------------|--------------------------|
| SY3000 | SY3000-GS-1 |
| SY5000 | SY5000-GS-1 |
| SY7000 | SY7000-GS-1 |
| SY9000 | SY9000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.


■ Individual SUP spacer assembly



| Series | Assembly part no. | Port size | t |
|---------------|-------------------|-----------|------|
| SY3000 | SY3000-38-20A(-Q) | M5 x 0.8 | 10.5 |
| SY5000 | SY5000-38-1+A(-Q) | 1/8 | 15 |
| SY7000 | SY7000-38-1+A(-Q) | 1/4 | 18 |
| SY9000 | SY9000-38-1+A(-Q) | 1/4 | 20 |

Note) • The SUP port of SY3000/5000/7000 may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the conditions shown in the figure.)
• For the SY9000, it can only be used on the end plate side.


■ Individual EXH spacer assembly



| Series | Assembly part no. | Port size | t |
|---------------|-------------------|-----------|------|
| SY3000 | SY3000-39-20A(-Q) | M5 x 0.8 | 10.5 |
| SY5000 | SY5000-39-1+A(-Q) | 1/8 | 15 |
| SY7000 | SY7000-39-1+A(-Q) | 1/4 | 18 |
| SY9000 | SY9000-39-1+A(-Q) | 1/4 | 20 |

Note) In case of 20P and 23P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve.

■ Individual SUP spacer assembly + Individual EXH spacer assembly (Double spacer)

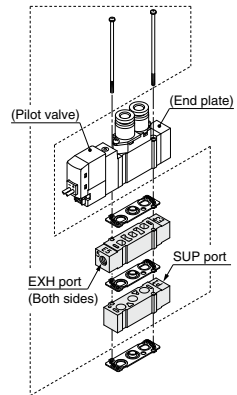

●: Available x: Not available

| Series | Individual SUP + Individual EXH Assemble part no. | Port size | Applicable manifold types | |
|---------------|---|-----------|---------------------------|-----|
| | | | 20 | 20P |
| SY3000 | SY3000-120-1A(-Q) | M5 x 0.8 | ● | x |
| SY5000 | SY5000-75-2+A(-Q) | 1/8 | ● | x |
| SY7000 | SY7000-73-3+A(-Q) | 1/4 | ● | x |

Note) The SUP spacer's port does not have an orientation. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. As for the EXH ports, adjust the symbol "S" to the pilot valve side. Also, please make sure to connect the individual ports to protect the wiring section of the pilot valve from drainage, etc.

The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)

⚠ Caution

Mounting screw tightening torques

M2: 0.16 N·m
M3: 0.8 N·m
M4: 1.4 N·m

* Thread type

| Nil | Rc |
|-----|------|
| F | G |
| N | NPT |
| T | NPTF |


⚠ Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.


Manifold Option

■ Connector assembly

For single solenoid (SY3000-37-81A-□-N)



For double solenoid (SY3000-37-81A-□-□)




Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))
Integrated type

| Model | Part no. | Connector mounting position |
|------------|-------------------|--|
| SS5Y3-20SA | SY3000-37-81A-3-N | Single : For 1 to 4 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 4 stations |
| | SY3000-37-81A-2-N | Single : For 5 to 8 stations |
| | SY3000-37-81A-2-4 | Double/3 position: For 5 to 8 stations |
| SS5Y5-20SA | SY3000-37-81A-3-N | Single : For 1 to 8 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 8 stations |
| SS5Y7-20SA | SY3000-37-81A-3-N | Single : For 1 to 4 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 4 stations |
| | SY3000-37-81A-4-N | Single : For 5 to 8 stations |
| | SY3000-37-81A-4-7 | Double/3 position: For 5 to 8 stations |

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly

SY3000-37-80A-□



■ Housing (8 pcs/set)

SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

| Model | Part no. | Connector mounting position |
|------------|------------------|-----------------------------|
| SS5Y3-20SA | SY3000-37-80A-3 | For A side |
| | SY3000-37-80A-6 | For B side |
| | SY3000-37-80A-4 | For A side |
| | SY3000-37-80A-7 | For B side |
| SS5Y5-20SA | SY3000-37-80A-3 | For A side |
| | SY3000-37-80A-6 | For B side |
| | SY3000-37-80A-7 | For A side |
| | SY3000-37-80A-9 | For B side |
| SS5Y7-20SA | SY3000-37-80A-4 | For A side |
| | SY3000-37-80A-7 | For B side |
| | SY3000-37-80A-8 | For A side |
| | SY3000-37-80A-11 | For B side |
| SS5Y9-23SA | SY3000-37-80A-6 | For A side |
| | SY3000-37-80A-11 | For B side |
| | SY3000-37-80A-9 | For A side |
| | SY3000-37-80A-14 | For B side |
| | SY3000-37-80A-13 | For A side |
| | SY3000-37-80A-18 | For B side |

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.

Manifold Option

■ SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



| Series | Part no. |
|---------------|--------------|
| SY9000 | SY9000-61-2A |

■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



| Series | Part no. |
|---------------|--------------|
| SY9000 | SY9000-61-2A |

■ Label for blocking disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk

Label for EXH block disk

Label for SUP/EXH block disk




* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ DIN Rail Dimensions/Weight for SY9000

VZ1000-11-4-□

Refer to L dimensions

* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.

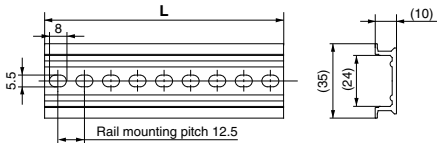


| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------------|------|-------|------|-------|-------|-------|------|-------|-------|-------|
| L Dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| Weight (g) | 24.8 | 28 | 31.1 | 34.3 | 37.4 | 40.6 | 43.8 | 46.9 | 50.1 | 53.3 |
| No. | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| L Dimension | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 |
| Weight (g) | 56.4 | 59.6 | 62.7 | 65.9 | 69.1 | 72.2 | 75.4 | 78.6 | 81.7 | 84.9 |
| No. | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| L Dimension | 348 | 360.5 | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 |
| Weight (g) | 88 | 91.2 | 94.4 | 97.5 | 100.7 | 103.9 | 107 | 110.2 | 113.3 | 116.5 |

Note) For DIN rail, refer to page 640.

Refer to L1 dimension on pages 447, 456 and 466 for lengths that correspond to the number of manifold stations.

■ Cable assembly (For 20P, 23P)

AXT100-FC26-1

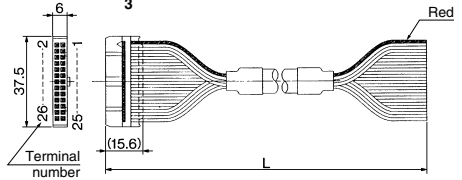

Connector Assembly for Flat Ribbon Cables

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|------------------------|
| 1.5 m | AXT100-FC26-1 | Cable 26 core x 28 AWG |
| 3 m | AXT100-FC26-2 | |
| 5 m | AXT100-FC26-3 | |


* For other commercial connectors, use a 26 pins with strain relief conforming to MIL-C-83503.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- Japan Aviation Electronics Industry, Limited
- 3M Japan Limited
- J.S.T. Mfg. Co., Ltd.
- Fujitsu Limited

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size od | Model | A | L | D |
|-----------------------------|----------------|------|------|------|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 12 | KQ2P-12 | 24 | 44.5 | 14 |
| 1/8" | KQ2P-01 | 16 | 31.5 | 5 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |
| 3/8" | KQ2P-11 | 22 | 43 | 11.5 |

How to Increase Manifold Bases (SY9000 series only) Manifold case can be added at any location.

When a type 23 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 23P manifold, wiring unit for the stations and lead assembly will be required.)

- 1 Loosen the tension bolts ⑤ connecting the manifold base, and pull out both of 2 tension bolts.
(When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)
- 2 Separate the blocks at the location where station expansion is desired.
- 3 Mount additional manifold block assembly.
- 4 Press block-to-block so that there's no gap. After connection, insert a tension bold for desired stations and then tighten it.


⚠ Caution (Tightening torque: 2.9 N·m)
(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 1.4 N·m)

⚠ Caution

1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
3. By adding wiring unit assembly to type 23 manifold, it can be changed to type 23P manifold, too.

Body Ported Manifold Exploded View, 23/23P Common

As for body ported manifold, it is available only for SY9000 series to disassemble or increase the manifold.

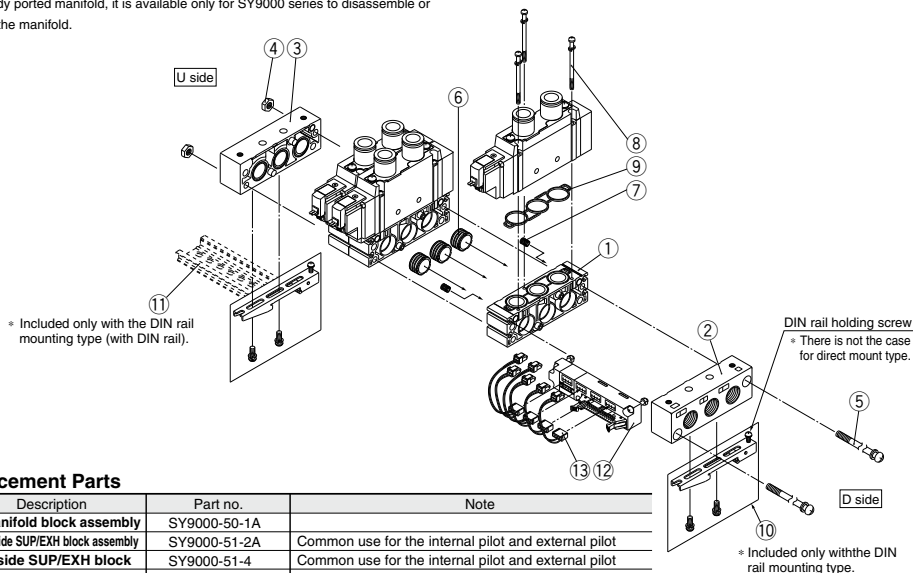

Replacement Parts

| No. | Description | Part no. | Note |
|-----|--------------------------------------|---------------|---|
| 1 | Manifold block assembly | SY9000-50-1A | |
| 2 | D side SUP/EXH block assembly | SY9000-51-2A | Common use for the internal pilot and external pilot |
| 3 | U side SUP/EXH block | SY9000-51-4 | Common use for the internal pilot and external pilot |
| 4 | Hexagon nut | SY9000-25-1 | M5 x 0.8 |
| 5 | Tension bolt | SY9000-23-□ | Since □ at the end of part number corresponds with the number of stations, fill in the same number as the number of stations. |
| 6 | Bush assembly | SY9000-61-1A | Included in the Manifold block assembly and the D side SUP/EXH block assembly. |
| 7 | Bush assembly | SY9000-61-3A | Included in the Manifold block assembly and the D side SUP/EXH block assembly. |
| 8 | Round head combination screw | SY9000-18-2 | Included in the Manifold block assembly. |
| 9 | Manifold gasket | SY9000-11-1 | Included in the Manifold block assembly. |
| 10 | Clamp sub assembly | SY9000-29-1A | |
| 11 | DIN rail | VZ1000-11-4-□ | Refer to page 469. |
| 12 | Wiring unit assembly | SY9000-36-□A | Since □ in part number corresponds with the number of stations, fill in the number of stations (4 to 12). |
| 13 | Connector assembly | SY9000-37-□□ | Refer to page 455. |

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |


5 Port Solenoid Valve Body Ported Manifold Cassette Type

Note) AC-type models that are CE-compliant have DIN terminals only.



Type **60**

SY3000/5000/7000 Series



How to Order

SS5Y **3** - 60 - **05** **D** - [] - []

| Series | |
|--------|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

| Valve stations | |
|----------------|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Option

When a DIN rail longer than standard is required, enter the number of manifold stations that corresponds with the length of DIN rail needed. Max. 20 stations


SUP/EXH block assembly mounting position

| Symbol | Mounting position | Applicable stations |
|--------|-------------------|---------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 20 stations |
| B | Both sides | 2 to 20 stations |
| M | Special location | |

* For special specifications, indicate separately by the manifold specification sheet.

How to Order Manifold Assembly (Example)

Example

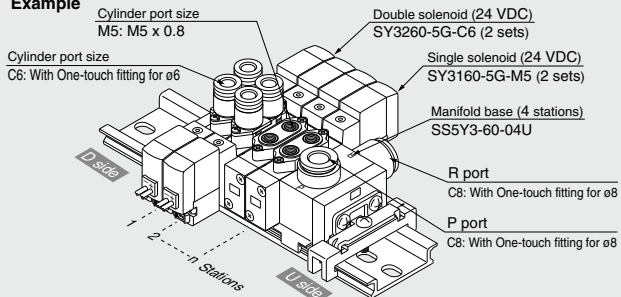

SS5Y3-60-04U 1 set (Type 60, 4-station manifold base part no.)
 * SY3260-5G-C6 2 sets (Double solenoid part no.)
 * SY3160-5G-M5 2 sets (Single solenoid part no.)

↳ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Manifold Specifications

| Model | SS5Y3-60(-Q) | | SS5Y5-60(-Q) | | SS5Y7-60(-Q) | |
|---|-------------------------------------|--|---|--|--------------|--|
| Applicable valve | SY3□60 | | SY5□60 | | SY7□60 | |
| Manifold type | Stacking type/DIN rail mounted | | | | | |
| P (SUP)/R (EXH) | Common SUP/Common EXH | | | | | |
| Valve stations | 2 to 20 stations ^{Note 1)} | | | | | |
| A, B port location | Valve | | | | | |
| Port size | P, R port | C8 (One-touch fitting for ø8) M5 x 0.8 | C10 (One-touch fitting for ø10) 1/8 | C12 (One-touch fitting for ø12) 1/4 | | |
| | A, B port | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) | | |
| Manifold base weight W (g) ^{Note 2)} (n: Number of SUP/EXH blocks, m: Weight of DIN rail) | | W = 13n + m + 36 | W = 41.2n + m + 77.6 | W = 65.4n + m + 128.2 | | |

Note 1) In cases such as those where many valves are operated simultaneously, use "-[station]B (SUP/EXH block on both sides)", applying pressure to the P ports on both sides and exhausting from the R ports on both sides.

Note 2) For DIN rail weight, refer to page 478.

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|--------------|----------------|--------------|------------------------------|------|------|------------------------------|------|------|
| | 1,5/3 (P,R) | 4,2 (A,B) | 1 → 4/2(P → A/B) | | | 4/2 → 5/3(A/B → R) | | |
| | | | C (dm ³ /(s·bar)) | b | Cv | C (dm ³ /(s·bar)) | b | Cv |
| SS5Y3-60(-Q) | C8 | M5 | 0.55 | 0.29 | 0.14 | 0.72 | 0.24 | 0.18 |
| | | C4 | 0.57 | 0.24 | 0.14 | 0.71 | 0.20 | 0.17 |
| | | C6 | 0.68 | 0.28 | 0.17 | 0.77 | 0.24 | 0.19 |
| SS5Y5-60(-Q) | C10 | 1/8 | 1.8 | 0.24 | 0.44 | 2.1 | 0.17 | 0.47 |
| | | C6 | 1.5 | 0.30 | 0.37 | 2.0 | 0.16 | 0.46 |
| | | C8 | 1.8 | 0.20 | 0.45 | 2.2 | 0.17 | 0.50 |
| SS5Y7-60(-Q) | C12 | 1/4 | 3.7 | 0.25 | 0.96 | 3.8 | 0.19 | 0.94 |
| | | C8 | 3.2 | 0.26 | 0.81 | 4.0 | 0.18 | 0.96 |
| | | C10 | 3.7 | 0.28 | 0.98 | 4.1 | 0.19 | 1.0 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

SJ

SY

SY

S0700

S0700

How to Order Valve

Note) AC-type models that are CE-compliant have DIN terminals only.

SY 3 1 60 - **5 L** - **C6**

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | | |
|---|--------------------------------------|--|
| 1 | 2 position single (A)4 2(B) | |
| | (EA)5 1 3(EB) (P) | |
| 2 | 2 position double (A)4 2(B) | |
| | (EA)5 1 3(EB) (P) | |
| 3 | 3 position closed center (A)4 2(B) | |
| | (EA)5 1 3(EB) (P) | |
| 4 | 3 position exhaust center (A)4 2(B) | |
| | (EA)5 1 3(EB) (P) | |
| 5 | 3 position pressure center (A)4 2(B) | |
| | (EA)5 1 3(EB) (P) | |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| For DC | |
|--------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

For AC (50/60Hz)

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.

* D, Y, DO and YO only available for SY5000, SY7000.

* For type W□, DC voltage is only available.

Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|---|
| Nil | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluoro rubber (Refer to page 624.) |

A, B port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |

Thread type

| Nil | Rc |
|-----|------|
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5


One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø5/32" | — |
| N7 | One-touch fitting for ø1/4" | SY3000 |
| N3 | One-touch fitting for ø5/32" | — |
| N7 | One-touch fitting for ø1/4" | SY5000 |
| N9 | One-touch fitting for ø5/16" | — |
| N9 | One-touch fitting for ø5/16" | SY7000 |
| N11 | One-touch fitting for ø3/8" | SY7000 |

Manual override

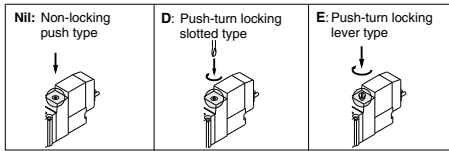

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With light/surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y, (SY5000/7000 only)

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

| | 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC | | | | 24, 12 VDC/100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC |
|-----------------------------------|--|--|------------------------------|--|--|---------------------|
| | Grommet | L plug connector | M plug connector | DIN terminal | M8 connector | |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | MN: Without lead wire | (SY5000, 7000) D, Y: With connector | W□: Without connector cable | |
| | | | | | | |
| H: Lead wire length 600 mm | LN: Without lead wire | LO: Without connector | MO: Without connector | DO, YO: Without connector | W□: With connector cable (Note 2) | |
| | | | | | | |
| Manifold mounting | SY3000 ● | ● | ● | — (Note 1) | ● | |
| | SY5000 ● | ● | ● | ● | ● | |
| | SY7000 ● | ● | ● | ● | ● | |
| CE-compliant | DC ● | — | — | ● | — | |
| | AC — | — | — | ● | — | |

Note 1) The DIN terminal of the SY3000 series cannot be mounted on a standard manifold. For details, refer to page 639.

Note 2) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

Note 3) When ordering single unit of the cassette type solenoid valve, the bushing assembly is included.

* LN, MN type: with 2 sockets.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.

* For connector cable of M8 connector, refer to page 641.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Specifications

| Series | | SY3000 | SY5000 | SY7000 |
|---|-------------------|---|--------|--------|
| Fluid | | Air | | |
| Internal pilot Operating pressure range (MPa) | 2 position single | 0.15 to 0.7 | | |
| | 2 position double | 0.1 to 0.7 | | |
| | 3 position | 0.2 to 0.7 | | |
| Ambient and fluid temperature (°C) | | Max. 50 | | |
| Max. operating frequency (Hz) | 2 position double | 10 | 5 | 5 |
| | 3 position | 3 | 3 | 3 |
| Manual override (Manual operation) | | Non-locking push type, Push-turn locking slotted type, Push-turn locking lever type | | |
| Pilot exhaust method | | Common exhaust type for main and pilot valve | | |
| Lubrication | | Not required | | |
| Mounting position | | Unrestricted | | |
| Impact/Vibration resistance <small>Note)</small> | | 150/30 | | |
| Enclosure | | Dust proof (+ DIN terminal, M8 connector: IP65) | | |

Note) Impact resistance: No malfunction occurred when it is tested in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition.

Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz.

Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values in the initial stage)

* Based on IEC60529

Solenoid Specifications

| | | | |
|--------------------------------------|-------------|---|--|
| Electrical entry | | Grommet (G), (H) L plug connector (L) M plug connector (M) DIN terminal (D), (Y) M8 connector (W) | |
| Coil rated voltage (V) | DC | 24, 12, 6, 5, 3 | 24, 12 |
| | AC 50/60 Hz | 100, 110, 200, 220 | |
| Allowable voltage fluctuation | | ±10% of rated voltage * | |
| Power consumption (W) | DC | Standard | 0.35 [With indicator light: 0.4 (DIN terminal with indicator light: 0.45)] |
| | | With power saving circuit | 0.1 (With indicator light only) * [Starting 0.4, Holding 0.1] |
| Apparent power (VA) * | AC | 100 V | 0.78 (With indicator light: 0.81) 0.78 (With indicator light: 0.87) |
| | | 110 V [115 V] | 0.86 (With indicator light: 0.89) 0.86 (With indicator light: 0.97) 0.94 (With indicator light: 0.97) 0.94 (With indicator light: 1.07) |
| | | 200 V | 1.18 (With indicator light: 1.22) 1.15 (With indicator light: 1.30) |
| | | 220 V [230 V] | 1.30 (With indicator light: 1.34) 1.27 (With indicator light: 1.46) 1.42 (With indicator light: 1.46) 1.39 (With indicator light: 1.60) |
| Surge voltage suppressor | | Diode (Varistor is for DIN terminal and non-polar) | |
| Indicator light | | LED (AC of DIN connector is neon light.) | |

* In common between 110 VAC and 115 VAC, and between 220 VAC and 230 VAC.

* For 115 VAC and 230 VAC, the allowable voltage is -15% to +5% of rated voltage.

* For details, refer to page 636.

Response Time

Note) Based on dynamic performance test, JIS B 8375-1981. (Coil temperature: 20°C, at rated voltage)

SY3000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|----------------------|---|-------------------------------|------------|
| | Without surge voltage suppressor | With surge voltage suppressor | |
| | | S, Z type | R, U type |
| 2 position single | 12 or less | 15 or less | 12 or less |
| 2 position double | 10 or less | 13 or less | 10 or less |
| 3 position | 15 or less | 20 or less | 16 or less |

SY5000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|----------------------|---|-------------------------------|------------|
| | Without surge voltage suppressor | With surge voltage suppressor | |
| | | S, Z type | R, U type |
| 2 position single | 19 or less | 26 or less | 19 or less |
| 2 position double | 18 or less | 22 or less | 18 or less |
| 3 position | 32 or less | 38 or less | 32 or less |

SY7000

| Type of actuation | Response time (ms) (at the pressure of 0.5 MPa) | | |
|----------------------|---|-------------------------------------|------------|
| | Without light/surge voltage suppressor | With light/surge voltage suppressor | |
| | | S, Z type | R, U type |
| 2 position single | 31 or less | 38 or less | 33 or less |
| 2 position double | 27 or less | 30 or less | 28 or less |
| 3 position | 50 or less | 56 or less | 50 or less |

SJ

SY

SY

S0700

S0700

Weight

SY3000 series

| Valve model | Type of actuation | | Port size A, B | Weight (g) | | |
|-------------|-------------------|-----------------------------------|----------------------------------|------------|--------------------|--------------|
| | | | | Gro-mmet | L/M plug connector | M8 Connector |
| SY3□60-□-M5 | 2 position | Single | M5 x 0.8 | 49 | 51 | 55 |
| | | Double | | 70 | 73 | 81 |
| | 3 position | Closed center | | 73 | 76 | 84 |
| | | Exhaust center Pressure center | | | | |
| SY3□60-□-C4 | 2 position | Single | C4 (One-touch fitting for ø4) | 62 | 61 | 65 |
| | | Double | | 80 | 83 | 91 |
| | 3 position | Closed center | | 82 | 86 | 94 |
| | | Exhaust center Pressure center | | | | |
| SY3□60-□-C6 | 2 position | Single | C6 (One-touch fitting for ø6) | 55 | 57 | 61 |
| | | Double | | 76 | 79 | 87 |
| | 3 position | Closed center | | 78 | 82 | 90 |
| | | Exhaust center Pressure center | | | | |

Note) [] : denotes normal position.

SY7000 series


| Valve model | Type of actuation | | Port size A, B | Weight (g) | | | |
|--------------|-------------------|-----------------------------------|------------------------------------|------------|--------------------|--------------|--------------|
| | | | | Gro-mmet | L/M plug connector | DIN terminal | M8 Connector |
| SY7□60-□-02 | 2 position | Single | 1/4 | 103 | 105 | 126 | 109 |
| | | Double | | 125 | 128 | 170 | 136 |
| | 3 position | Closed center | | 133 | 136 | 178 | 144 |
| | | Exhaust center Pressure center | | | | | |
| SY7□60-□-C8 | 2 position | Single | C8 (One-touch fitting for ø8) | 138 | 139 | 160 | 143 |
| | | Double | | 160 | 163 | 205 | 171 |
| | 3 position | Closed center | | 168 | 171 | 213 | 179 |
| | | Exhaust center Pressure center | | | | | |
| SY7□60-□-C10 | 2 position | Single | C10 (One-touch fitting for ø10) | 123 | 125 | 146 | 129 |
| | | Double | | 145 | 149 | 191 | 157 |
| | 3 position | Closed center | | 153 | 157 | 199 | 165 |
| | | Exhaust center Pressure center | | | | | |

SY5000 series

| Valve model | Type of actuation | | Port size A, B | Weight (g) | | | |
|-------------|-------------------|-----------------------------------|----------------------------------|------------|--------------------|--------------|--------------|
| | | | | Gro-mmet | L/M plug connector | DIN terminal | M8 Connector |
| SY5□60-□-01 | 2 position | Single | 1/8 | 67 | 69 | 90 | 71 |
| | | Double | | 91 | 94 | 136 | 102 |
| | 3 position | Closed center | | 97 | 100 | 142 | 108 |
| | | Exhaust center Pressure center | | | | | |
| SY5□60-□-C4 | 2 position | Single | C4 (One-touch fitting for ø4) | 91 | 93 | 114 | 97 |
| | | Double | | 113 | 116 | 158 | 124 |
| | 3 position | Closed center | | 119 | 122 | 164 | 130 |
| | | Exhaust center Pressure center | | | | | |
| SY5□60-□-C6 | 2 position | Single | C6 (One-touch fitting for ø6) | 86 | 88 | 109 | 92 |
| | | Double | | 108 | 111 | 153 | 119 |
| | 3 position | Closed center | | 114 | 117 | 159 | 125 |
| | | Exhaust center Pressure center | | | | | |
| SY5□60-□-C8 | 2 position | Single | C8 (One-touch fitting for ø8) | 78 | 80 | 101 | 84 |
| | | Double | | 100 | 103 | 145 | 111 |
| | 3 position | Closed center | | 106 | 109 | 151 | 117 |
| | | Exhaust center Pressure center | | | | | |

Manifold Option

■ Individual SUP block assembly




One-touch fitting (Metric size)

| Port size | Assembly part no. | Applicable series |
|---------------------------|-------------------|-------------------|
| One-touch fitting for ø6 | SY3000-54-2C(-Q) | SY3000 |
| One-touch fitting for ø8 | SY3000-54-1C(-Q) | SY3000 |
| One-touch fitting for ø10 | SY5000-54-1C(-Q) | SY5000 |
| One-touch fitting for ø12 | SY7000-54-1C(-Q) | SY7000 |

One-touch fitting (Inch size)

| Port size | Assembly part no. | Applicable series |
|------------------------------|-------------------|-------------------|
| One-touch fitting for ø5/16" | SY3000-54-3C(-Q) | SY3000 |
| One-touch fitting for ø3/8" | SY5000-54-2C(-Q) | SY5000 |
| One-touch fitting for ø3/8" | SY7000-54-3C(-Q) | SY7000 |

■ Individual EXH block assembly



One-touch fitting (Metric size)

| Port size | Assembly part no. | Applicable series |
|---------------------------|-------------------|-------------------|
| One-touch fitting for ø6 | SY3000-55-1B(-Q) | SY3000 |
| One-touch fitting for ø10 | SY5000-55-1B(-Q) | SY5000 |
| One-touch fitting for ø12 | SY7000-55-1B(-Q) | SY7000 |


One-touch fitting (Inch size)

| Port size | Assembly part no. | Applicable series |
|------------------------------|-------------------|-------------------|
| One-touch fitting for ø5/16" | SY3000-55-2B(-Q) | SY3000 |
| One-touch fitting for ø3/8" | SY5000-55-2B(-Q) | SY5000 |
| One-touch fitting for ø3/8" | SY7000-55-3B(-Q) | SY7000 |

[When supplying the manifold with 2 different supply pressures.]

Specify arrangement of individual SUP block assembly on the manifold specification sheet. (When using SSSY□-60-□□□, blocking disk is assembled on D side.)


<Manifold model no.: SSSY $\frac{3}{8}$ -60-□□□>

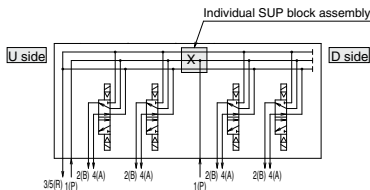

[When 2 different EXH passages are required.]

Specify arrangement of individual EXH block assembly on the manifold specification sheet. (When using SS5Y□-60-□□□, blocking disk is assembled on D side.)


<Manifold model no.: SS5Y $\frac{3}{8}$ -60-□□□>

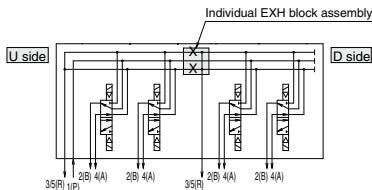

[When a different supply pressure is required for only a middle valve.]

Specify arrangement of individual SUP block assembly and SUP blocking disk on the manifold specification sheet.


(Applicable manifold model no.: SSSY□-60-□□B)

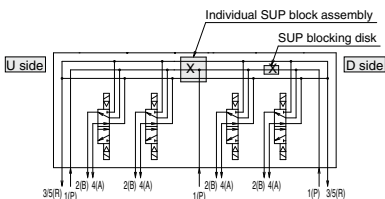

[When a separate exhaust passage is needed on only a middle valve.]

Specify arrangement of individual EXH block assembly and EXH blocking disk on the manifold specification sheet.

(Applicable manifold model no.: SS5Y□-60-□□B)

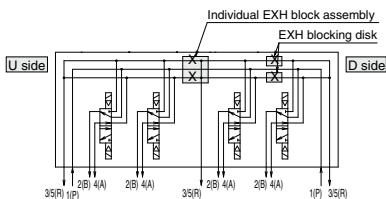

Manifold Option

■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold. (This is the same block disk used with the individual SUP block assembly.)



| Series | Part no. |
|---------------|--------------|
| SY3000 | SY3000-52-6A |
| SY5000 | SY5000-52-4A |
| SY7000 | SY7000-70-2A |

■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to separate both EXH passages. It is the same block disk that is used in the individual EXH block assembly.)



| Series | Part no. |
|---------------|--------------|
| SY3000 | SY3000-52-6A |
| SY5000 | SY5000-52-4A |
| SY7000 | SY7000-70-2A |

■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A


Label for SUP block disk

Label for EXH block disk

Label for SUP/EXH block disk




* When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

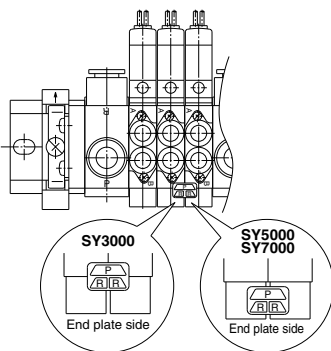

■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



| Series | Model | Effective area mm ² | A | B | C |
|-------------------------|----------|--------------------------------|-------|------|------|
| SY3000 (for ø8) | AN15-C08 | 20 | ø13 | 20 | 45 |
| SY5000 (for ø10) | AN20-C10 | 30 | ø16.5 | 30.5 | 57.5 |
| SY7000 (for ø12) | AN30-C12 | 41 | ø20 | 43.5 | 71.5 |

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions


| Applicable fittings size ød | Model | A | L | D |
|-----------------------------|----------------|------|------|------|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 12 | KQ2P-12 | 24 | 45.5 | 14 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |
| 3/8" | KQ2P-11 | 22 | 43 | 11.5 |

■ DIN Rail Dimensions/Weight for SY3000/5000

VZ1000-11-1-□

Refer to the L dimension tables

* Enter a number from the DIN rail dimension table below in them.

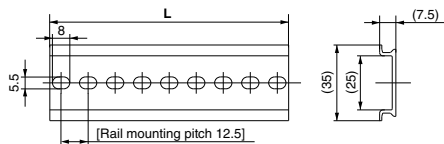

| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------------|------|-------|------|-------|------|-------|------|-------|------|-------|
| L dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| Weight (g) | 17.6 | 19.9 | 22.1 | 24.4 | 26.6 | 28.9 | 31.1 | 33.4 | 35.6 | 37.9 |

| No. | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|-------------|------|-------|------|-------|------|-------|------|-------|------|-------|
| L dimension | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 |
| Weight (g) | 40.1 | 42.4 | 44.6 | 46.9 | 49.1 | 51.4 | 53.6 | 55.9 | 58.1 | 60.4 |


| No. | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
|-------------|------|-------|------|-------|------|-------|------|-------|------|-------|
| L dimension | 348 | 360.5 | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 |
| Weight (g) | 62.6 | 64.9 | 67.1 | 69.4 | 71.6 | 73.9 | 76.1 | 78.4 | 80.6 | 82.9 |

■ DIN Rail Dimensions/Weight for SY7000

VZ1000-11-4-□

Refer to the L dimension tables

* Enter a number from the DIN rail dimension table below in them.

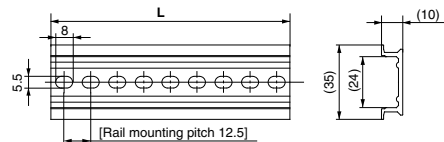

| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------------|------|-------|------|-------|------|-------|------|-------|------|-------|
| L dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| Weight (g) | 24.8 | 28 | 31.1 | 34.3 | 37.4 | 40.6 | 43.8 | 46.9 | 50.1 | 53.3 |

| No. | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
|-------------|------|-------|------|-------|------|-------|------|-------|------|-------|
| L dimension | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 |
| Weight (g) | 56.4 | 59.6 | 62.7 | 65.9 | 69.1 | 72.2 | 75.4 | 78.6 | 81.7 | 84.9 |

| No. | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
|-------------|-----|-------|------|-------|-------|-------|-----|-------|-------|-------|
| L dimension | 348 | 360.5 | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 |
| Weight (g) | 88 | 91.2 | 94.4 | 97.5 | 100.7 | 103.9 | 107 | 110.2 | 113.3 | 116.5 |


Note) For DIN rail mounting, refer to page 640.

Construction


SY series

Symbol

2 position single




2 position single

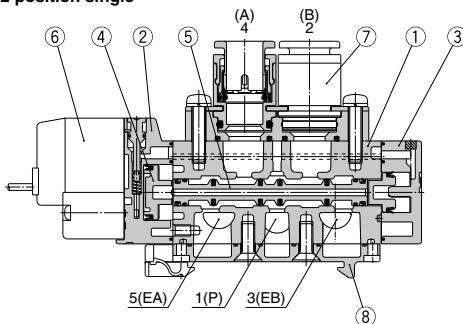


Symbol

2 position double




2 position double

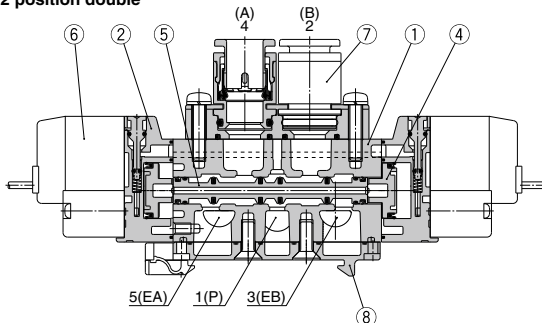


Symbol


3 position closed center




3 position exhaust center



3 position pressure center



3 position closed center / exhaust center / pressure center

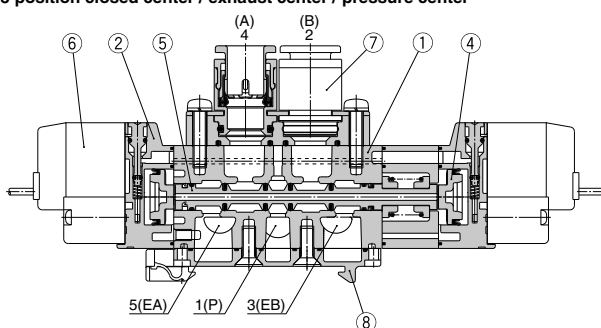

(This figure shows a closed center type.)

Component Parts

| No. | Description | Material | Note |
|-----|----------------------|---|-------|
| 1 | Body | Aluminum die-casted SY3000: Zinc die-casted | White |
| 2 | Adapter plate | Resin | White |
| 3 | End plate | Resin | White |
| 4 | Piston | Resin | — |
| 5 | Spool valve assembly | Aluminum/H-NBR | — |

Replacement Parts

| No. | Description | No. |
|-----|---|--|
| 6 | Pilot valve assembly | Refer to "How to Order Pilot Valve Assembly" on page 629. |
| 7 | Port block assembly | Refer to "How to Order Port Block Assembly" on page 629. |
| 8 | Bottom cover assembly ^(Note) | SY3000-41-2A (with screw, gasket) SY5000-41-2A (with screw, gasket) |

Note) There is no bottom cover assembly available for SY7000.

SJ

SY

SY




S0700

S0700

Dimensions




[]: AC

SS5Y3-60- Stations U

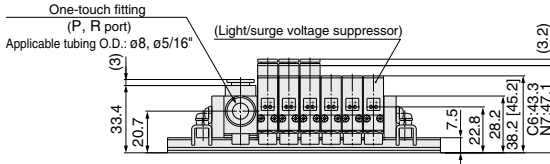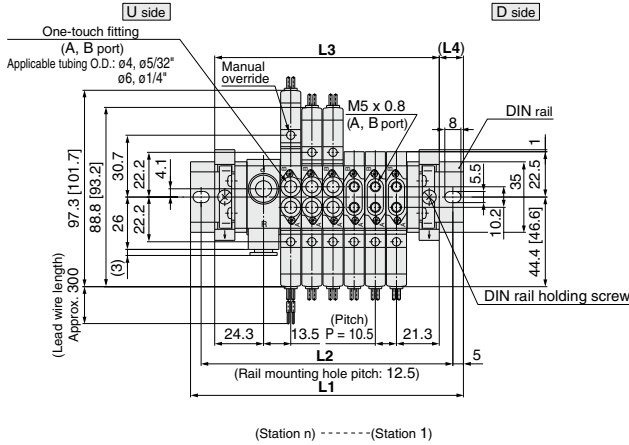



| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|-----------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 98 | 110.5 | 123 | 135.5 | 135.5 | 148 | 160.5 | 173 | 185.5 |
| L2 | 87.5 | 100 | 112.5 | 125 | 125 | 137.5 | 150 | 162.5 | 175 |
| L3 | 69.5 | 80 | 90.5 | 101 | 111.5 | 122 | 132.5 | 143 | 153.5 |
| L4 | 14 | 15 | 16 | 17 | 12 | 13 | 14 | 15 | 16 |

SS5Y3-60- Stations D

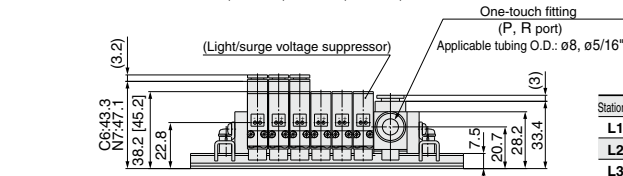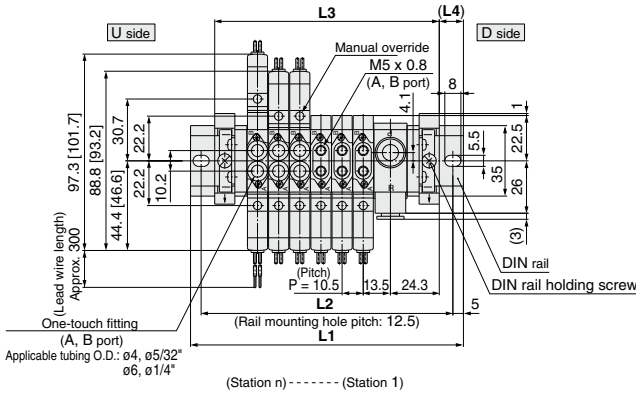

| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|-----------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 98 | 110.5 | 123 | 135.5 | 135.5 | 148 | 160.5 | 173 | 185.5 |
| L2 | 87.5 | 100 | 112.5 | 125 | 125 | 137.5 | 150 | 162.5 | 175 |
| L3 | 69.5 | 80 | 90.5 | 101 | 111.5 | 122 | 132.5 | 143 | 153.5 |
| L4 | 14 | 15 | 16 | 17 | 12 | 13 | 14 | 15 | 16 |


SS5Y3-60-Stations B

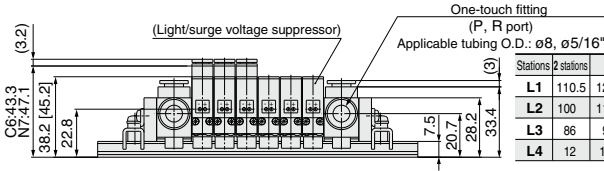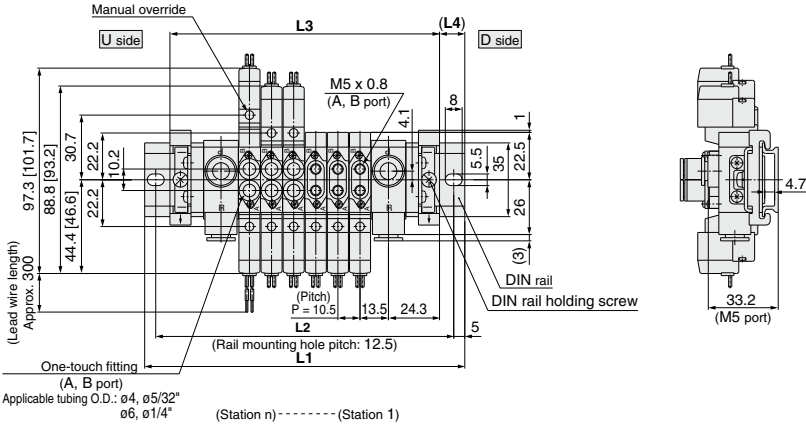


| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|----------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 173 | 185.5 | 198 |
| L2 | 100 | 112.5 | 125 | 137.5 | 150 | 162.5 | 162.5 | 175 | 187.5 |
| L3 | 86 | 96.5 | 107 | 117.5 | 128 | 138.5 | 149 | 159.5 | 170 |
| L4 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 | 14 |

| Stations | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|----------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 210.5 | 223 | 235.5 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 |
| L2 | 200 | 212.5 | 225 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 |
| L3 | 180.5 | 191 | 201.5 | 212 | 222.5 | 233 | 243.5 | 254 | 264.5 | 275 |
| L4 | 15 | 16 | 17 | 11.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |


L plug connector (L)

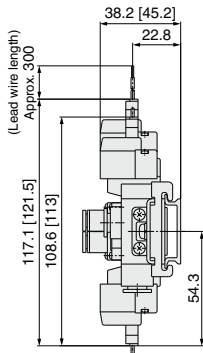

M plug connector (M)



M8 connector (WO)




Note) Refer to page 642 for dimensions of connector types.


Dimensions

[] : AC




SS5Y5-60-Stations U

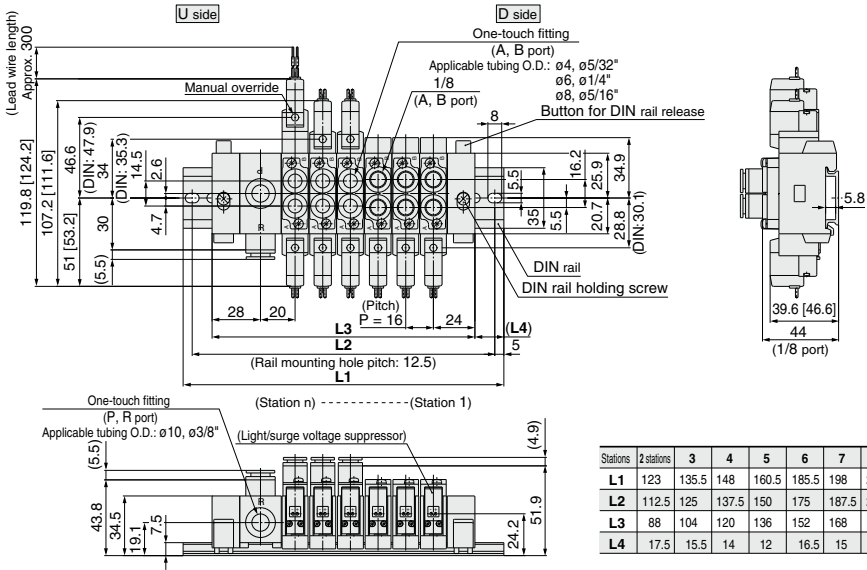

SS5Y5-60-Stations D

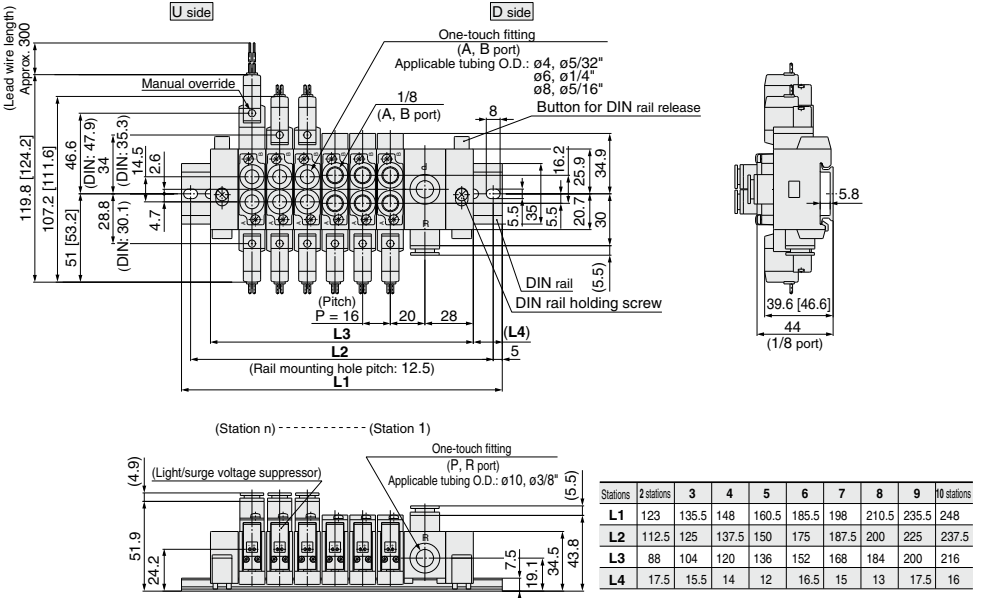

SS5Y5-60-Stations B

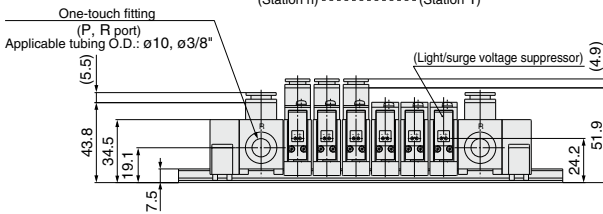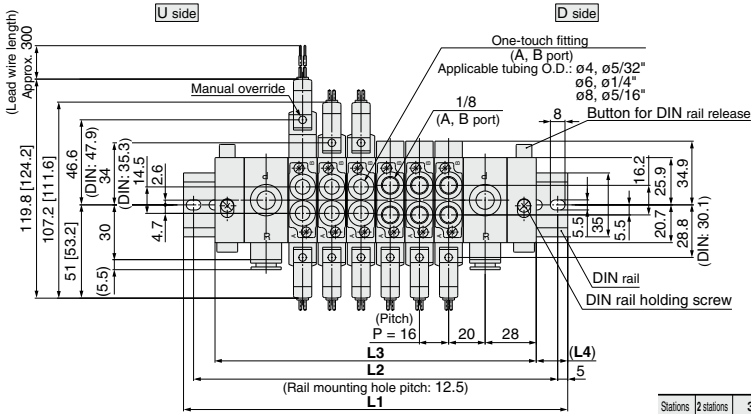


| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 stations |
|----------|------------|-------|-------|-------|-------|-------|------------|
| L1 | 135.5 | 160.5 | 173 | 185.5 | 210.5 | 223 | 235.5 |
| L2 | 125 | 150 | 162.5 | 175 | 200 | 212.5 | 225 |
| L3 | 112 | 128 | 144 | 160 | 176 | 192 | 208 |
| L4 | 11.5 | 16 | 14.5 | 12.5 | 17.5 | 15.5 | 13.5 |

| Stations | 9 stations | 10 | 11 | 12 | 13 | 14 | 15 stations |
|----------|------------|-------|-------|-------|-------|-------|-------------|
| L1 | 248 | 273 | 285.5 | 298 | 323 | 335.5 | 348 |
| L2 | 237.5 | 262.5 | 275 | 287.5 | 312.5 | 325 | 337.5 |
| L3 | 224 | 240 | 256 | 272 | 288 | 304 | 320 |
| L4 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 |


| Stations | 16 stations | 17 | 18 | 19 | 20 stations |
|----------|-------------|-------|-------|-------|-------------|
| L1 | 360.5 | 385.5 | 398 | 410.5 | 435.5 |
| L2 | 350 | 375 | 387.5 | 400 | 425 |
| L3 | 336 | 352 | 368 | 384 | 400 |
| L4 | 12 | 16.5 | 15 | 13 | 17.5 |

- JS
- SY
- SY
- S0700
- S0700


L plug connector (L)

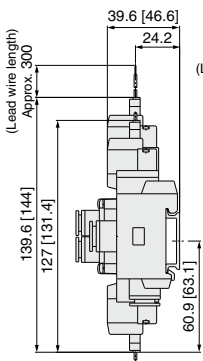


M plug connector (M)



DIN terminal (D, Y)

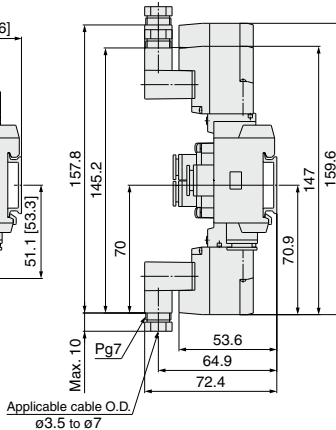

M8 connector (WO)




Note) Refer to page 642 for dimensions of connector types.


Dimensions

[] : AC


SS5Y7-60-Stations U

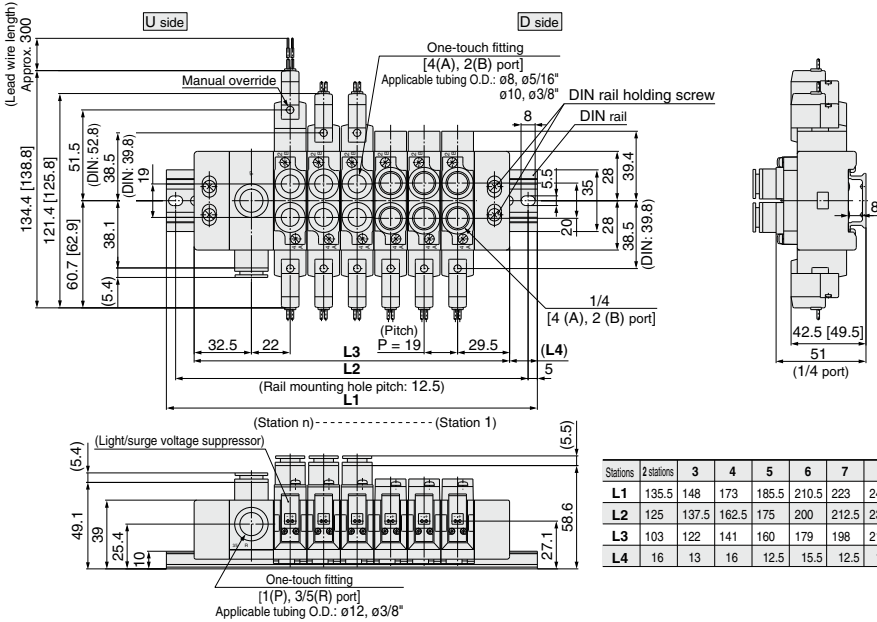


SS5Y7-60-Stations D

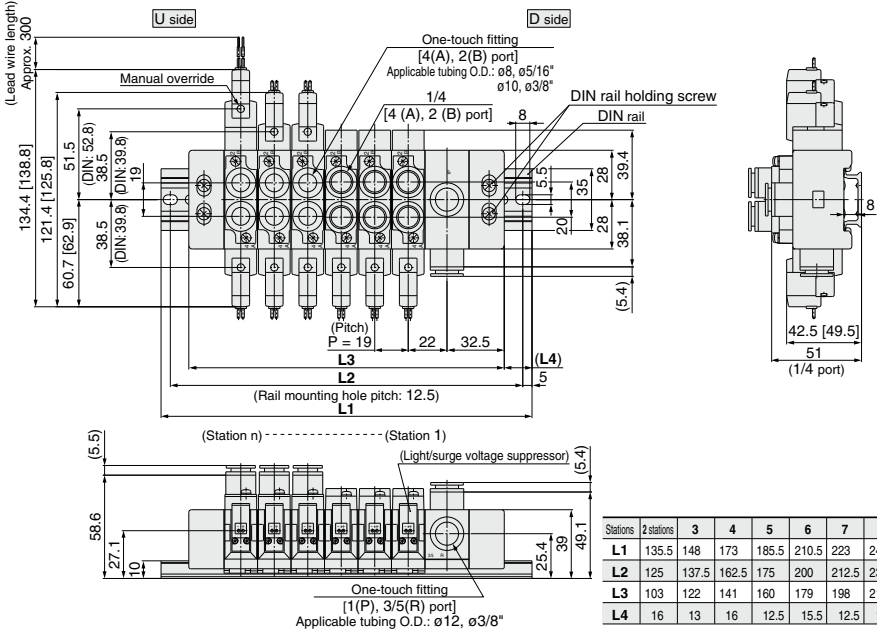

SS5Y7-60-Stations B

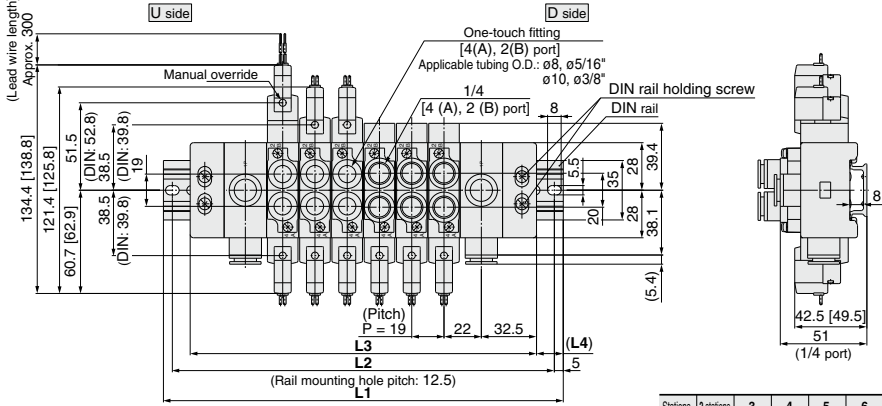

(Station n) ----- (Station 1)

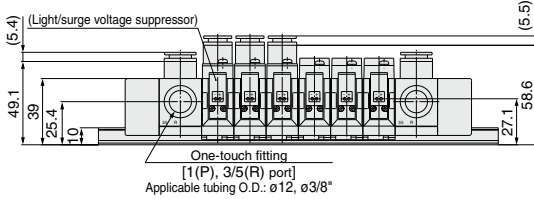


| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 stations |
|----------|------------|-------|-------|-------|-------|-------|------------|
| L1 | 160.5 | 173 | 198 | 210.5 | 235.5 | 248 | 273 |
| L2 | 150 | 162.5 | 187.5 | 200 | 225 | 237.5 | 262.5 |
| L3 | 128 | 147 | 166 | 185 | 204 | 223 | 242 |
| L4 | 16 | 13 | 16 | 12.5 | 15.5 | 12.5 | 15.5 |


| Stations | 9 stations | 10 | 11 | 12 | 13 | 14 | 15 stations |
|----------|------------|-------|-------|-------|-------|-------|-------------|
| L1 | 285.5 | 310.5 | 323 | 348 | 360.5 | 385.5 | 410.5 |
| L2 | 275 | 300 | 312.5 | 337.5 | 350 | 375 | 400 |
| L3 | 261 | 280 | 299 | 318 | 337 | 356 | 375 |
| L4 | 12 | 15 | 12 | 15 | 11.5 | 14.5 | 17.5 |

| Stations | 16 stations | 17 | 18 | 19 | 20 stations |
|----------|-------------|-------|-------|-------|-------------|
| L1 | 423 | 448 | 460.5 | 485.5 | 498 |
| L2 | 412.5 | 437.5 | 450 | 475 | 487.5 |
| L3 | 394 | 413 | 432 | 451 | 470 |
| L4 | 14.5 | 17.5 | 14 | 17 | 14 |


L plug connector (L)

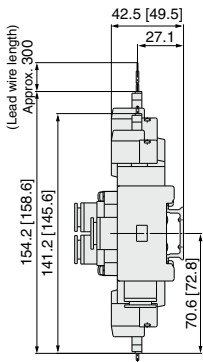


M plug connector (M)



DIN terminal (D, Y)

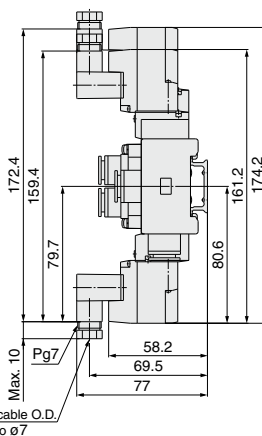

M8 connector (WO)




Note) Refer to page 642 for dimensions of connector types.

DIN Rail Manifold Exploded View

SY3000


Type 60

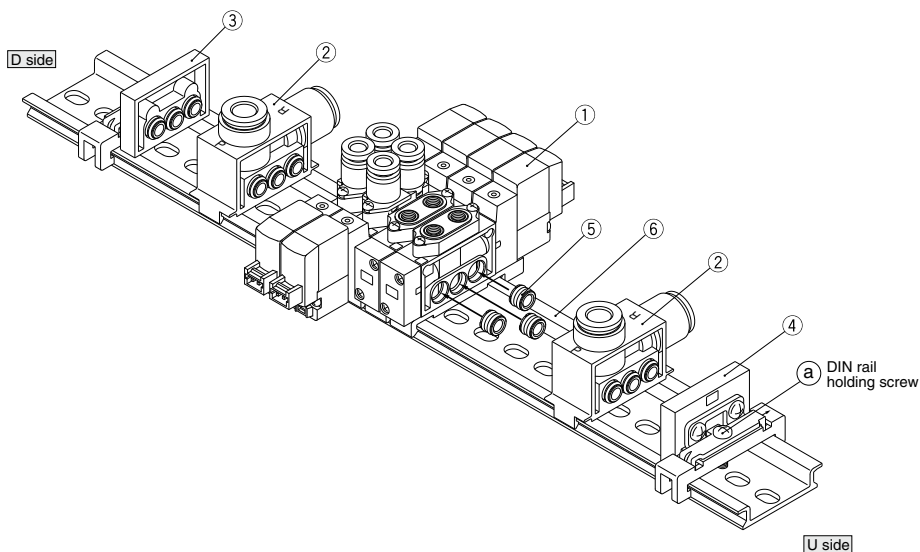

Replacement Parts

| No. | Description | Part no. | Note |
|-----|------------------------|--------------------------------|--|
| 1 | Valve | SY3□60-□□□(-Q) | □ at the end of part number denotes A. B port size: M5, C4, C6, N3, N7. Includes bushing assembly (SY3000-52-5A) 3 pcs. |
| 2 | SUP/EXH block assembly | SY3000-55- $\frac{1}{2}$ A(-Q) | P, R port (1: One-touch fitting for ø8, 2: One-touch fitting for ø5/16") Includes bushing assembly (SY3000-52-5A) 3 pcs. |
| 3 | End block assembly | SY3000-56-1A(-Q) | For D side (Bushing assembly: Not available for SY3000-52-5A) |
| 4 | End block assembly | SY3000-56-1B(-Q) | For U side (Bushing assembly: Not available for SY3000-52-5A) |
| 5 | Bushing assembly | SY3000-52-5A | |
| 6 | DIN rail | VZ1000-11-1-□ | Refer to page 478. |

SY5000
Type 60

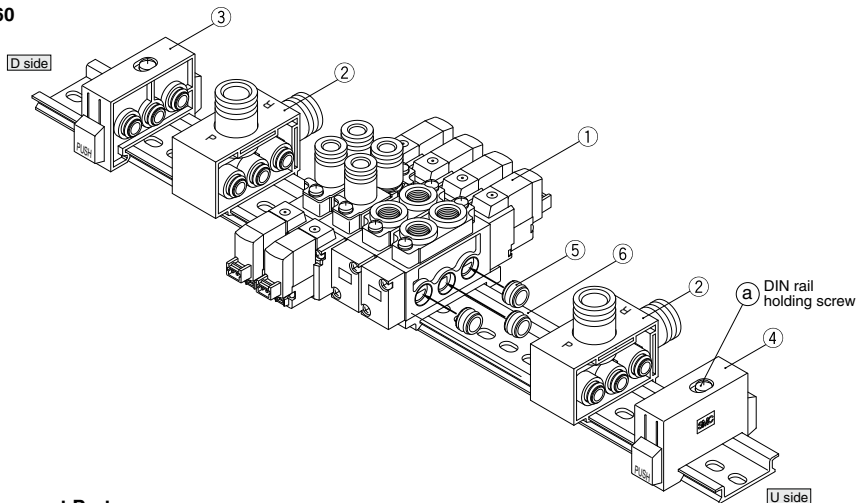

| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Replacement Parts

| No. | Description | Part no. | Note |
|-----|------------------------|--------------------------------|---|
| 1 | Valve | SY5□60-□□□(-Q) | □ at the end of part number denotes A, B port size: 01, C4, C6, C8, N3, N7, N9. Includes bushing assembly (SY5000-52-3A) 3 pcs. |
| 2 | SUP/EXH block assembly | SY5000-55- $\frac{1}{2}$ A(-Q) | P, R port (1: One-touch fitting for $\phi 10$, 2: One-touch fitting for $\phi 3/8$) Includes bushing assembly (SY5000-52-3A) 3 pcs. |
| 3 | End block assembly | SY5000-56-1A(-Q) | For D side (Bushing assembly: Not available for SY5000-52-3A) |
| 4 | End block assembly | SY5000-56-1B(-Q) | For U side (Bushing assembly: Not available for SY5000-52-3A) |
| 5 | Bushing assembly | SY5000-52-3A | |
| 6 | DIN rail | VZ1000-11-1-□ | Refer to page 478. |

How to Add Additional Valves to the DIN Rail Valves can be added at any station on the rail.

- 1 Loosen the manifold base clamping screw ②.
- 2 Separate the valves at the point where more valves are to be added.
- 3 Mount the additional valves on the DIN rail as shown in Fig. 1
- 4 Connect them together while pressing the block assemblies toward each other, and tighten the holding screw ③ to fix them to the DIN rail.

⚠ Caution

Tightening torque

SY3000: 1 N·m


SY5000: 1.4 N·m

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)

- Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.
- Refer to the fig. 2 when dismantling the valve from the DIN rail.

Fig. 1 Manifold mounting procedure


Fig. 2 Manifold dismantling procedure

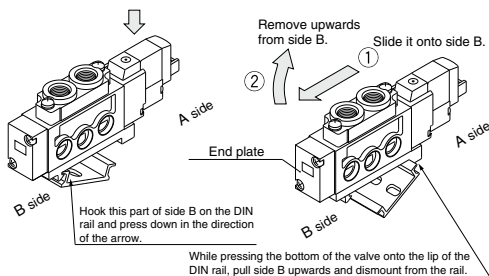

- ⚠ Caution** When clamping screw ③ of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rail in order to ensure air supply without leakage.

DIN Rail Manifold Exploded View

SY7000 Type 60

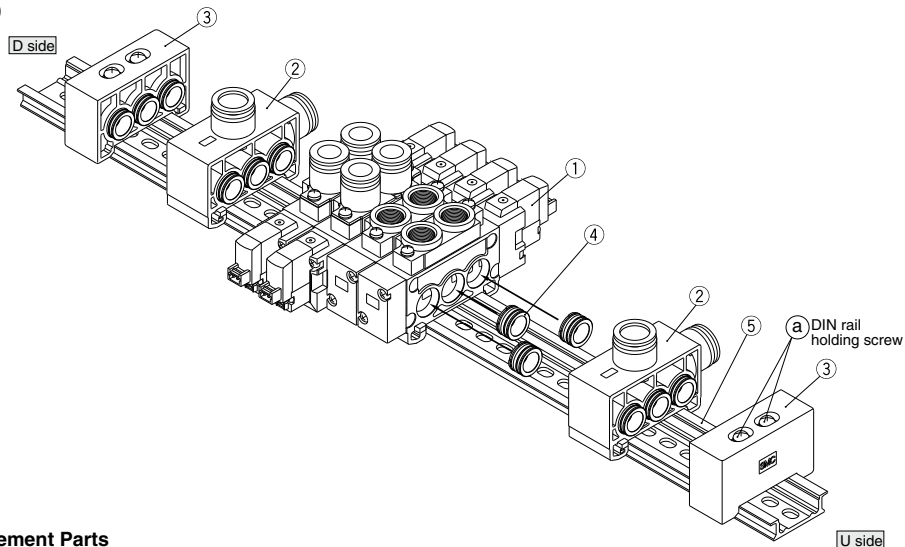

Replacement Parts

| No. | Description | Part no. | Note |
|-----|------------------------|--|---|
| 1 | Valve | SY7□60-□□-□(-Q) | □ at the end of part number denotes A, B port size: 02, C8, C10, N9, N11. Includes bushing assembly (SY7000-70-1A) 3 pcs. |
| 2 | SUP/EXH block assembly | SY7000-75- ¹ / ₃ A(-Q) | P, R port size (1: ø12 One-touch fitting, 3: 3/8" One-touch fitting) Includes bushing assembly (SY7000-70-1A) 3 pcs. |
| 3 | End block assembly | SY7000-56-1A(-Q) | In common for D side and U side (Bushing assembly: Not available for SY7000-70-1A.) |
| 4 | Bushing assembly | SY7000-70-1A | |
| 5 | DIN rail | VZ1000-11-4-□ | Refer to page 478. |

How to Add Additional Valves to the DIN Rail

Valves can be added at any station on the rail.

- 1 Loosen the rail holding screw (a) at both of 2 locations which holds the manifold base either in the U side or D side.
[When removing the end block assembly from the DIN rail, loosen the holding screws for DIN rail at first, then slide it to the edge of the rail.]
- 2 Separate the valves at the point where more valves are to be added.
- 3 Mount the additional valves on the DIN rail as shown in Fig. 1.
- 4 Connect them together while pressing the block assemblies toward each other, and tighten the 2 holding screws (a) for DIN rail alternately (2 to 3 times) with the prescribed torque (1.4 N·m) to fix them to the DIN rail.

⚠ Caution

Tightening torque

SY7000: 1.4 N·m

(While lightly holding the blocks after fixing an end block on one side, tighten the other end block for better sealing after no gap between valves is confirmed.)

- Bushing assembly must be seated properly to each valve block in order to prevent air leaks from occurring.
- Refer to the fig. 2 when dismantling the valve from the DIN rail.

Fig. 1 Manifold mounting procedure





Fig. 2 Manifold dismantling procedure



⚠ Caution

When clamping screw (a) of the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there are no gaps between valves and that the end block is firmly secured to the DIN rail in order to ensure air supply without leakage.

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Type **41**Type **42**

5 Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Individual Wiring

SY3000/5000/7000 Series



[Option]
Note) AC-type models that are
CE-compliant have DIN
terminals only.

How to Order Manifold

Type 41/Compact type

SS5Y **5** - **41** - **05** - **C8** □ - □

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Stations

| | |
|----|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

* This also includes the number of blanking plate assemblies.

Thread type

| | |
|-----|------|
| Nll | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

CE-compliant

| | |
|-----|--------------|
| Nll | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

A, B port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|--|-------------------|
| N3 | One-touch fitting for ø $\frac{3}{32}$ " | SY3000 |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | SY3000 |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | SY5000 |
| N9 | One-touch fitting for ø $\frac{5}{16}$ " | SY5000 |

Type 42/External pilot capable

SS5Y **5** - **42** - **05** - **C8** □ - □

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Stations

| | |
|----|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

* This also includes the number of blanking plate assemblies.

Thread type

| | |
|-----|------|
| Nll | Rc |
| F | G |
| N | NPT |
| T | NPTF |

CE-compliant

| | |
|-----|--------------|
| Nll | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

A, B port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01 | 1/8 | SY3000 |
| 02 | 1/4 | SY5000 |
| 02 | 1/4 | SY7000 |

One-touch fitting (Metric size)


| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|--|-------------------|
| N3 | One-touch fitting for ø $\frac{3}{32}$ " | SY3000 |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | SY3000 |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | SY5000 |
| N9 | One-touch fitting for ø $\frac{5}{16}$ " | SY5000 |
| N11 | One-touch fitting for ø $\frac{3}{8}$ " | SY7000 |

How to Order Manifold Assembly (Example)

Example

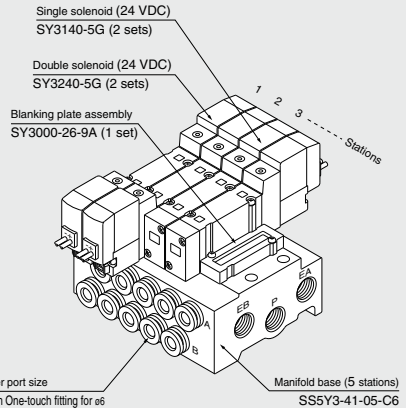

SS5Y3-41-05-C6 ... 1 set (Type 41, 5-station manifold base part no.)

* **SY3240-5G ... 2 sets (Double solenoid part no.)**

* **SY3140-5G ... 2 sets (Single solenoid part no.)**

* **SY3000-26-9A ... 1 set (Blanking plate assembly part no.)**

The asterisk denotes the symbol for assembly.
Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



How to Order Valve

(Note) AC-type models that are CE-compliant have DIN terminals only.

SY **5** **2** **40** - **5** **L** - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot type

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

For AC (50/60 Hz)

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.
 * For type W□, DC voltage is only available.
 (Note) AC-type models that are CE-compliant have DIN terminals only.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

(Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
 * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

(Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Electrical entry

| | | 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC | | | 24, 12 VDC/ 100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC |
|-------------------|--|--|--|--|---|--|
| | | Grommet | L plug connector | M plug connector | DIN terminal | M8 connector |
| | G: Lead wire length 300 mm lead | | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | (SY5000/7000 only) D: With connector | WO: Without connector cable |
| | H: Lead wire length 600 mm | | LN: Without lead wire | MN: Without lead wire | DO: Without connector | WC: With connector cable ^{Note 2)} |
| | | | LO: Without connector | MO: Without connector | Y: With connector | |
| | | | | | YO: Without connector | |
| | | | | | — Note 1) | |
| Manifold mounting | SY3000 | ● | ● | ● | ● | ● |
| | SY5000 | ● | ● | ● | ● | ● |
| | SY7000 | ● | ● | ● | ● | ● |
| CE-compliant | DC | ● | ● | ● | ● | ● |
| | AC | — | — | — | ● | — |

Note 1) The DIN terminal of the SY3000 series cannot be mounted on a standard manifold. For details, refer to page 639.

Note 2) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

* LN, MN type: with 2 sockets.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.

* For connector cable of M8 connector, refer to page 641.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

SY


SY

SY

S0700

S0700

Manifold Specifications



| | | | | | | | | | | |
|---|-------------------------------------|--|--|--|--|--|---------------------|-----|---------------------|-----|
| Model | SS5Y3-41(-Q) | | SS5Y3-42(-Q) | | SS5Y5-41(-Q) | | SS5Y5-42(-Q) | | SS5Y7-42(-Q) | |
| Applicable valve | SY3□40 | | | | SY5□40 | | | | | |
| Manifold type | Single base/B mount | | | | | | | | | |
| P(SUP)/R(EXH) | Common SUP, Common EXH | | | | | | | | | |
| Valve stations | 2 to 20 stations ^{Note 1)} | | | | | | | | | |
| A, B port | Base | | | | | | | | | |
| | Side | | | | | | | | | |
| Porting specifications | Direction | | | | | | | | | |
| | P, EA, EB port | 1/8 | | | 1/4 | | | 1/4 | | |
| Port size | A, B port | M5 x 0.8, | 1/8 | 1/8 | 1/8 | 1/4 | 1/4 | 1/4 | 1/4 | 1/4 |
| | | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) | | | | |
| Manifold base weight W (g) n: Stations | W = 30n + 50 | W = 37n + 63 | W = 61n + 101 | W = 79n + 127 | W = 100n + 151 | | | | | |

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 530.

Flow Rate Characteristics



| Model | Port size | | Flow rate characteristics | | | | | |
|---------------------|------------------------|----------------|-----------------------------|------|------|-----------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s(bar)) | b | Cv | C (dm ³ /s(bar)) | b | Cv |
| SS5Y3-41(-Q) | 1/8 | C6 | 0.75 | 0.19 | 0.18 | 0.81 | 0.23 | 0.20 |
| SS5Y3-42(-Q) | 1/8 | C6 | 0.75 | 0.20 | 0.18 | 0.82 | 0.20 | 0.20 |
| SS5Y5-41(-Q) | 1/4 | C8 | 1.8 | 0.23 | 0.44 | 1.9 | 0.16 | 0.45 |
| SS5Y5-42(-Q) | 1/4 | C8 | 1.9 | 0.20 | 0.46 | 1.9 | 0.12 | 0.43 |
| SS5Y7-42(-Q) | 1/4 | C10 | 3.0 | 0.25 | 0.75 | 3.0 | 0.12 | 0.66 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


SY3000: SS5Y3-41-Stations-M5, C4,N3, C6,N7

[]: AC

Grommet (G)




With interface regulator (with gauge)

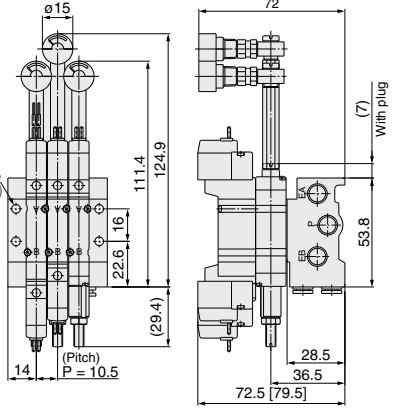


- SJ**
- SY**
- SY**
- S0700**
- S0700**


(Station 1) - - - - (Station n)

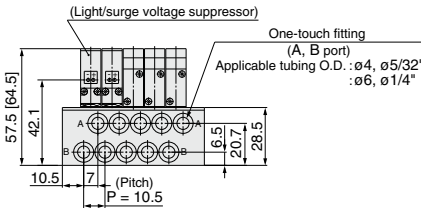


For M5




L plug connector (L)

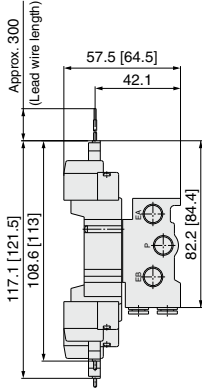

M plug connector (M)



M8 connector (WO)




Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|------|----|------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 38.5 | 49 | 59.5 | 70 | 80.5 | 91 | 101.5 | 112 | 122.5 | 133 | 143.5 | 154 | 164.5 | 175 | 185.5 | 196 | 206.5 | 217 | 227.5 |
| L2 | 30.5 | 41 | 51.5 | 62 | 72.5 | 83 | 93.5 | 104 | 114.5 | 125 | 135.5 | 146 | 156.5 | 167 | 177.5 | 188 | 198.5 | 209 | 219.5 |

SY5000: SS5Y5-41- Stations -01, C6, N7, C8, N9

[]: AC

Grommet (G)

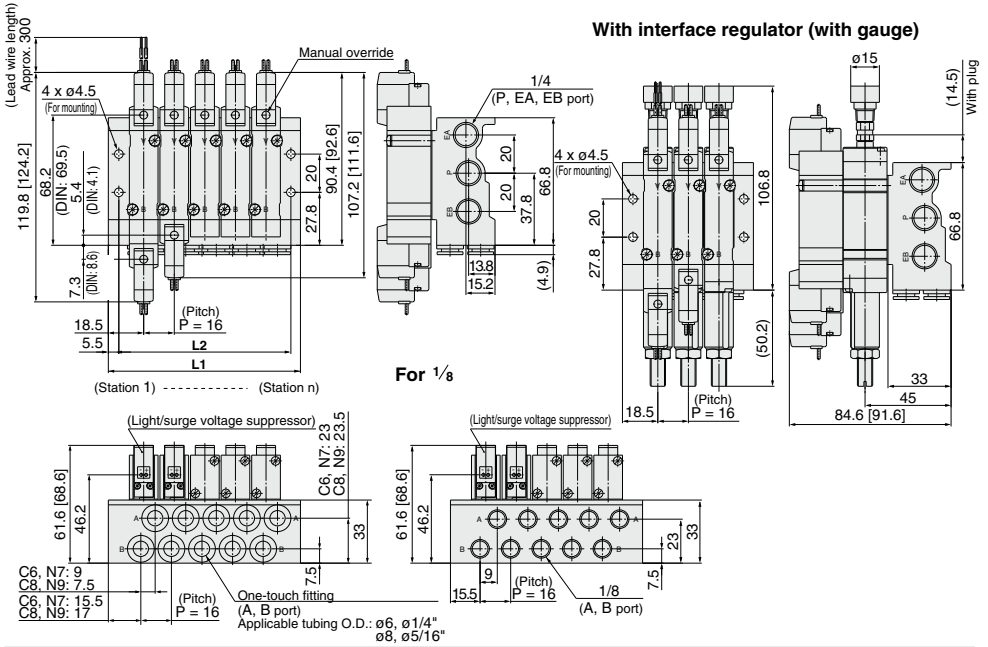


L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

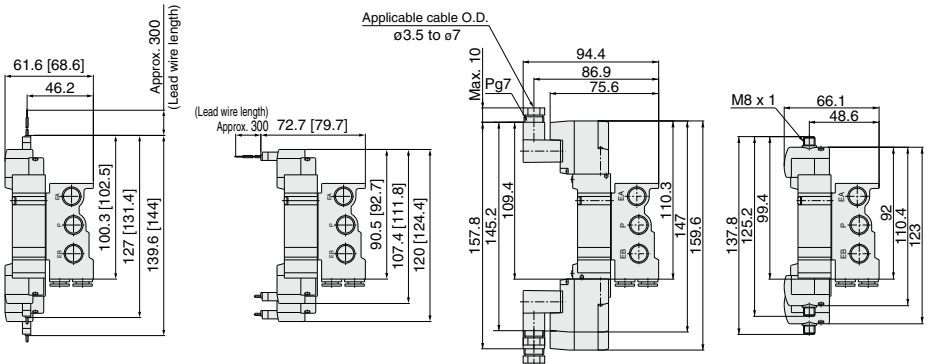


Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 52.5 | 68.5 | 84.5 | 100.5 | 116.5 | 132.5 | 148.5 | 164.5 | 180.5 | 196.5 | 212.5 | 228.5 | 244.5 | 260.5 | 276.5 | 292.5 | 308.5 | 324.5 | 340.5 |
| L2 | 42 | 58 | 74 | 90 | 106 | 122 | 138 | 154 | 170 | 186 | 202 | 218 | 234 | 250 | 266 | 282 | 298 | 314 | 330 |

SY3000: SS5Y3-42- Stations - C4, N3
C6, N7


[]: AC

Grommet (G)

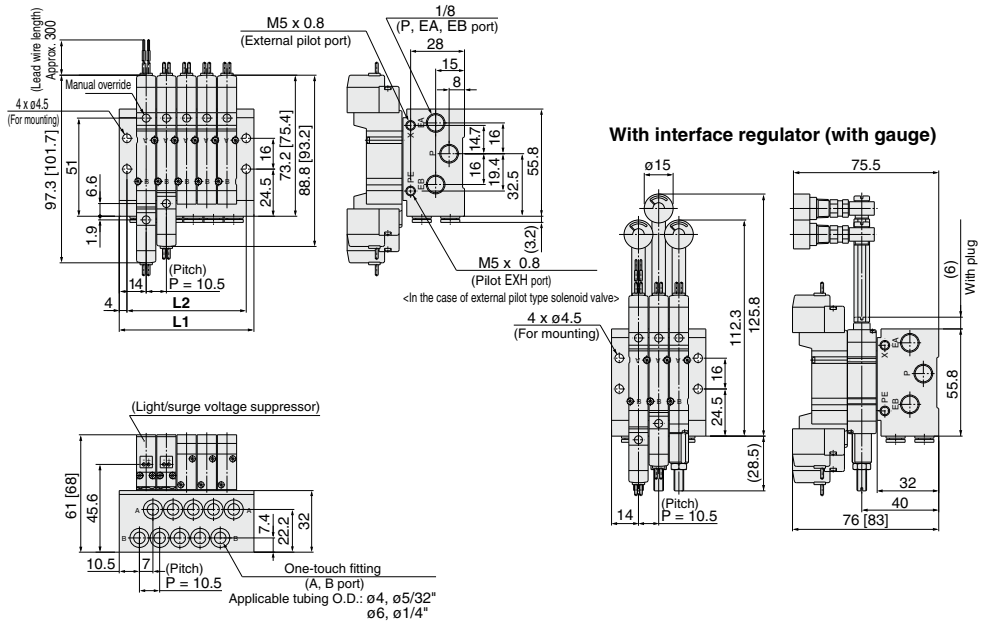


- SJ**
- SY**
- SY**
- S0700**
- S0700**


L plug connector (L)

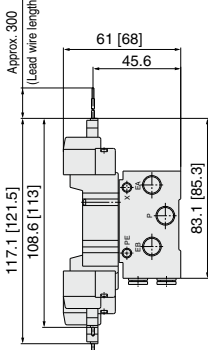

M plug connector (M)



M8 connector (WO)





Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|------|----|------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 38.5 | 49 | 59.5 | 70 | 80.5 | 91 | 101.5 | 112 | 122.5 | 133 | 143.5 | 154 | 164.5 | 175 | 185.5 | 196 | 206.5 | 217 | 227.5 |
| L2 | 30.5 | 41 | 51.5 | 62 | 72.5 | 83 | 93.5 | 104 | 114.5 | 125 | 135.5 | 146 | 156.5 | 167 | 177.5 | 188 | 198.5 | 209 | 219.5 |



SY5000: SS5Y5-42- Stations C6, N7
C8, N9

[] : AC

Grommet (G)

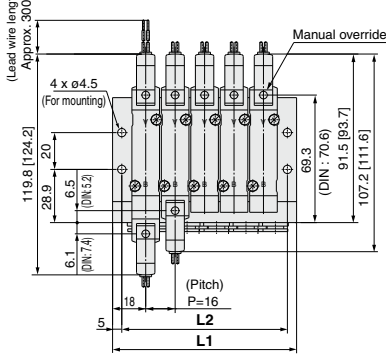

With interface regulator (with gauge)



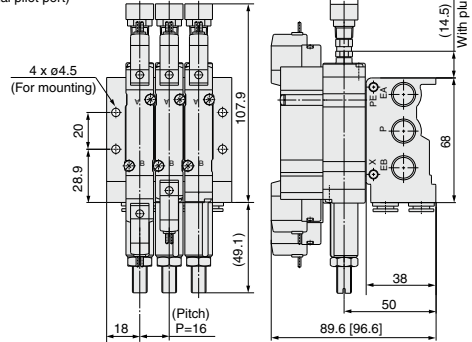
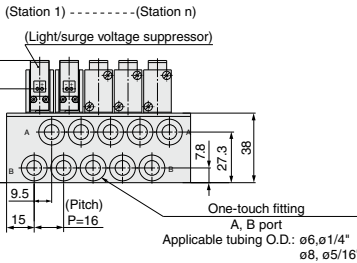


L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

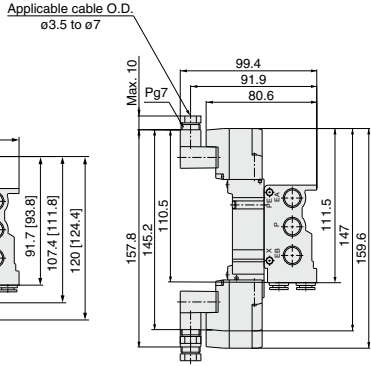


Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| L1 | 52 | 68 | 84 | 100 | 116 | 132 | 148 | 164 | 180 | 196 | 212 | 228 | 244 | 260 | 276 | 292 | 308 | 324 | 340 |
| L2 | 42 | 58 | 74 | 90 | 106 | 122 | 138 | 154 | 170 | 186 | 202 | 218 | 234 | 250 | 266 | 282 | 298 | 314 | 330 |

SY5000: SS5Y5-42- Stations -02

[] : AC

Grommet (G)

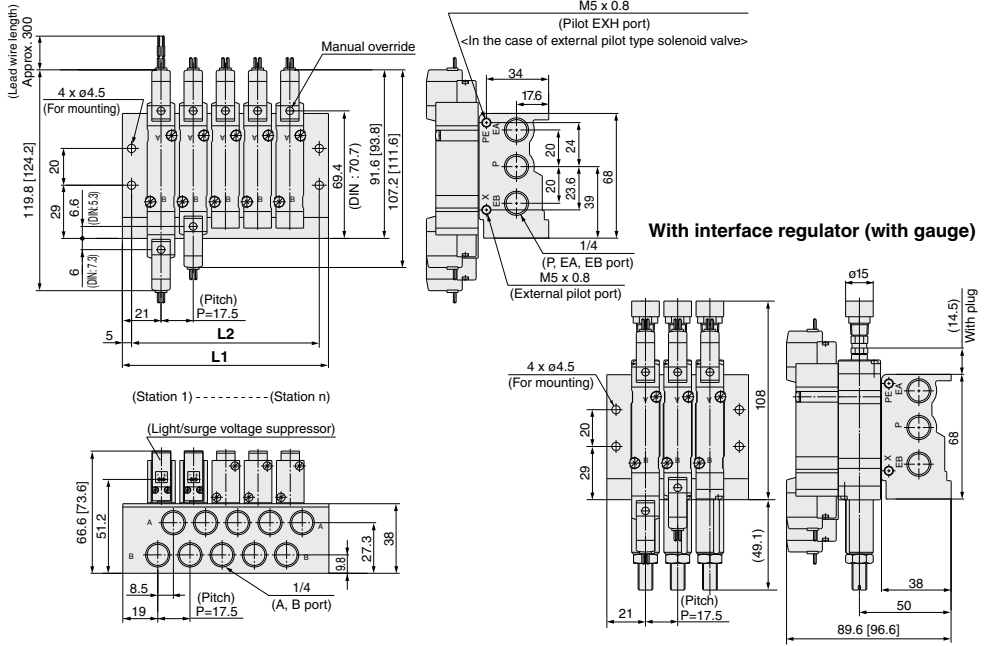


L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

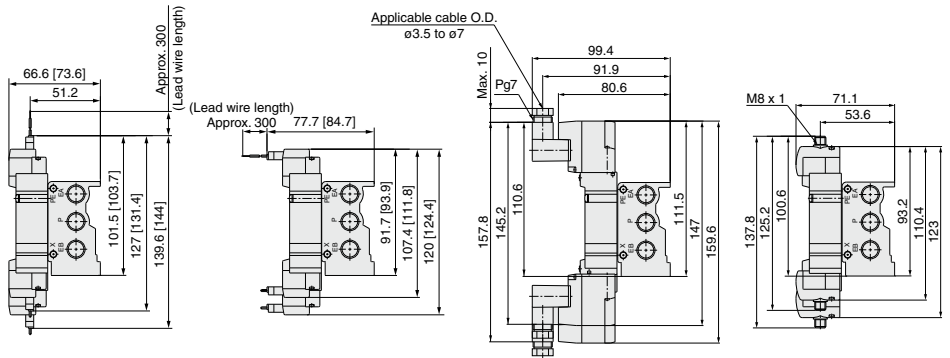


Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 59.5 | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 | 252 | 269.5 | 287 | 304.5 | 322 | 339.5 | 357 | 374.5 |
| L2 | 49.5 | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 | 242 | 259.5 | 277 | 294.5 | 312 | 329.5 | 347 | 364.5 |

SY7000: SS5Y7-42- Stations -02, C10, N11

[] : AC

Grommet (G)

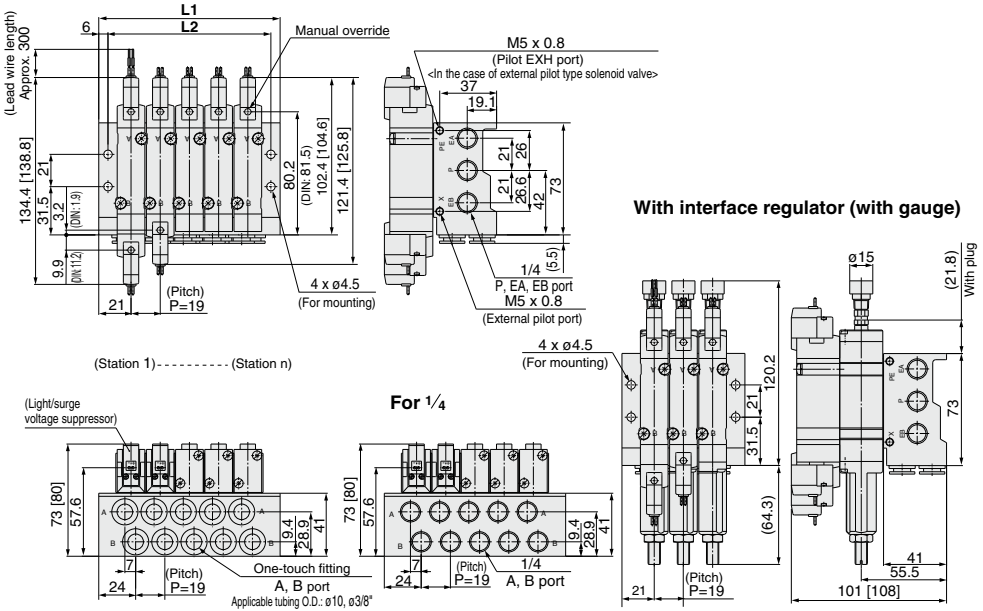


- SJ**
- SY**
- SY**
- S0700**
- S0700**

L plug connector (L)

M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)

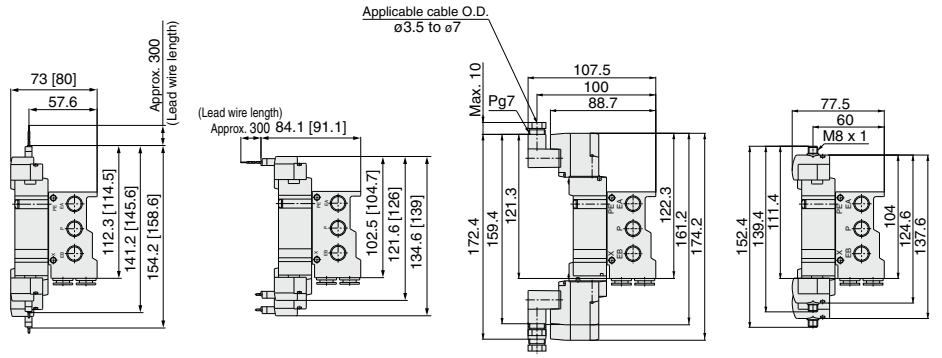

Note) Refer to page 642 for dimensions of connector types.

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|------------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| L1 | 61 | 80 | 99 | 118 | 137 | 156 | 175 | 194 | 213 | 232 | 251 | 270 | 289 | 308 | 327 | 346 | 365 | 384 | 403 |
| L2 | 49 | 68 | 87 | 106 | 125 | 144 | 163 | 182 | 201 | 220 | 239 | 258 | 277 | 296 | 315 | 334 | 353 | 372 | 391 |

Type **43**

5 Port Solenoid Valve Base Mounted Manifold Stacking Type/Individual Wiring **SY9000 Series**



[Option]
Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Manifold

SS5Y9-43-05 U [] C8 [] [] []

• **Manifold series**

| | |
|---|--------|
| 9 | SY9000 |
|---|--------|

• **Valve stations**

| Symbol | Stations |
|--------|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

* This also includes the number of blanking plate assemblies.

• **P, R port outlets**

| Symbol | Port outlet | Applicable stations |
|--------|-------------|---------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 20 stations |

• **SUP/EXH block assembly specifications**

| Symbol | Specifications |
|--------|---------------------------------------|
| NI | Standard/Internal pilot specification |
| R | External pilot specification |
| S | Internal pilot/Built-in silencer |
| RS | External pilot/Built-in silencer |

• **Thread type**

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* When One-touch fittings are selected for "A, B port size", the symbol is nil.

• **Option**

| Symbol | Mounting |
|--------|---|
| Nil | Direct mounting |
| D | DIN rail mounting (with DIN rail) |
| DO | DIN rail mounting (without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |

• **A, B port size
Thread piping**

| Symbol | Port size |
|--------|-----------|
| 02 | 1/4 |
| 03 | 3/8 |

• **One-touch fitting (Metric size)**

| Symbol | Port size |
|--------|---------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| C12 | One-touch fitting for ø12 |
| M | Mixed |

• **One-touch fitting (Inch size)**

| Symbol | Port size |
|--------|------------------------------|
| N9 | One-touch fitting for ø3/16" |
| N11 | One-touch fitting for ø3/8" |
| M | Mixed |

* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.


• **CE-compliant**

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Manifold Assembly (Example)

Example

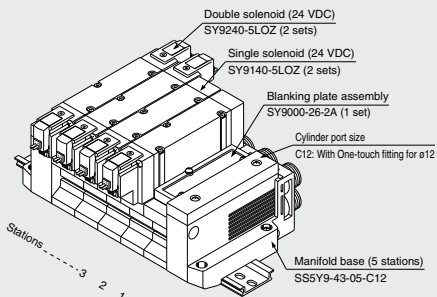

SS5Y9-43-05B-C12 ... 1 set (Type 43, 5-station manifold base part no.)
 * **SY9000-26-2A ... 1 set (Blanking plate assembly part no.)**
 * **SY9140-5LOZ ... 2 sets (Single solenoid part no.)**
 * **SY9220-5LOZ ... 2 sets (Double solenoid part no.)**

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Valve

SY 9 2 40 [] [] - **5 L** [] [] - [] - []

Series

| | |
|---|--------|
| 9 | SY9000 |
|---|--------|

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot type

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| For DC | |
|--------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

| For AC (%/60 Hz) | |
|------------------|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.
 * For type W□, DC voltage is only available.

Note) AC-type models that are CE-compliant have DIN terminals only.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

| Electrical entry for G, H, L, M, W | |
|------------------------------------|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With indicator light and surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.

| Electrical entry for D, Y | |
|---------------------------|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
 * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.


Electrical entry

| | | 24, 12, 6, 5, 3 VDC/ 100, 110, 200, 220 VAC | | | 24, 12 VDC/ 100, 110, 200, 220 VAC | 24, 12, 6, 5, 3 VDC | |
|--------------|-------------------------|--|--------------------------------|------------------|--|---------------------|---------------------------------------|
| | | Grommet | L plug connector | M plug connector | DIN terminal | M8 connector | |
| G: | Lead wire length 300 mm | L: | With lead wire (Length 300 mm) | M: | With lead wire (Length 300 mm) | D: | With connector |
| H: | Lead wire length 600 mm | LN: | Without lead wire | MN: | Without lead wire | DO: | Without connector |
| | | LO: | Without connector | MO: | Without connector | Y: | With connector |
| | | | | | | YO: | Without connector |
| | | | | | | W□: | Without connector cable |
| | | | | | | W□: | With connector cable ^{Note)} |
| CE-compliant | DC | ● | ● | ● | ● | ● | ● |
| | AC | — | — | — | ● | — | — |

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

- * LN, MN type: with 2 sockets.
 - * DIN terminal type "Y" which conforms to EN-175301-803C (former DIN43650C) is also available. For details, refer to page 638.
 - * For connector cable of M8 connector, refer to page 641.
 - * M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.
 - * Refer to page 638 for the lead wire length of L and M plug connectors.
 - * Refer to page 639 for the connector assembly with cover for L and M plug connectors.
- Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

| |
|-------|
| SY |
| SY |
| S0700 |
| S0700 |



Manifold Specifications

| | | |
|------------------------|----------------|---|
| Model | | SS5Y9-43(-Q) |
| Applicable valve | | SY9□40 |
| Manifold type | | Stacking type |
| P(SUP)/R(EXH) | | Common SUP, Common EXH |
| Valve stations | | 2 to 20 stations ⁽¹⁾ |
| A, B port | Location | Base |
| Porting specifications | Direction | Side |
| Port size | P, EA, EB port | C12 (One-touch fitting for ø12) |
| | A, B port | $\frac{1}{4}$ $\frac{3}{8}$ C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12) |
| Manifold base weight | | W = 107n + 330 |
| W (g), n: Stations | | |

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) Refer to "Manifold Option" on page 530.

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|---------------------|------------------------|----------------|---------------------------|------|-----|---------------------------|------|-----|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1→4/2 (P→A/B) | | | 4/2→5/3 (A/B→EA/EB) | | |
| | | | C (dm ³ /sbar) | b | Cv | C (dm ³ /sbar) | b | Cv |
| SS5Y9-43(-Q) | C12 | C12 | 6.4 | 0.29 | 1.6 | 7.3 | 0.29 | 1.8 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.



SY9000: SS5Y9-43- Stations D - 02, C8, N9, C10, N11 (-D)

[]: AC




Grommet (G)

* When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

With External Pilot Specifications

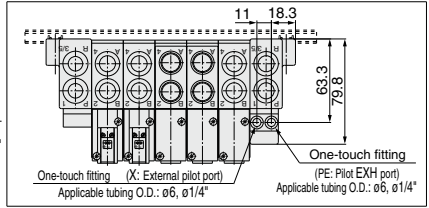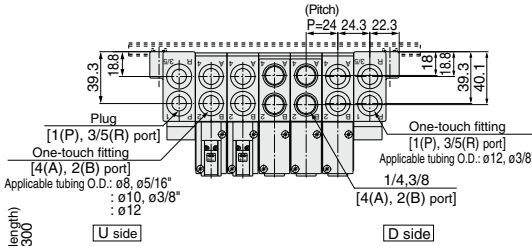

* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

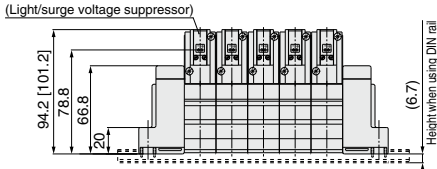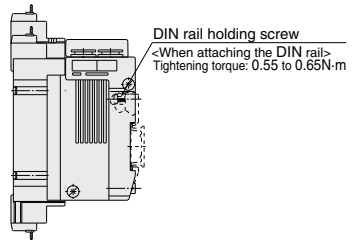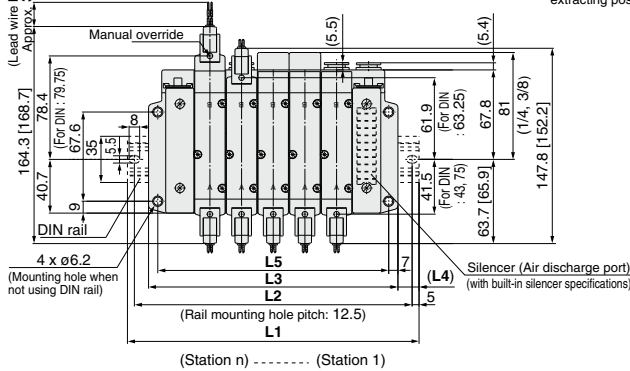



| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 137.5 | 162.5 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 117 | 141 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 103 | 127 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |

L plug connector (L)



M plug connector (M)

DIN terminal (D, Y)

M8 connector (WO)



Applicable cable O.D.
ø3.5 to ø7




Note) Refer to page 642 for dimensions of connector types.

SY9000: SS5Y9-43- Stations U -02 C9, N9 C10, N11 C12 (-D)


[] : AC

Grommet (G)


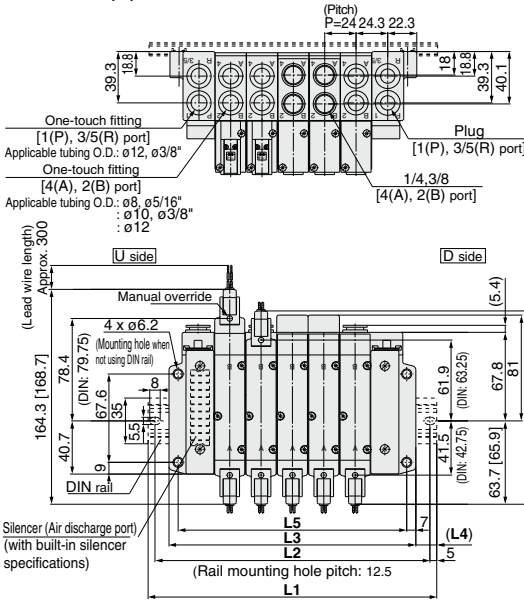


* When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

With External Pilot Specifications

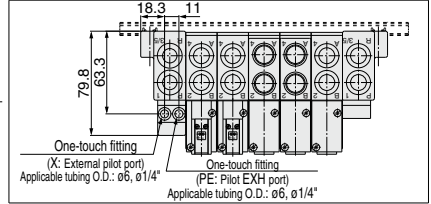


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

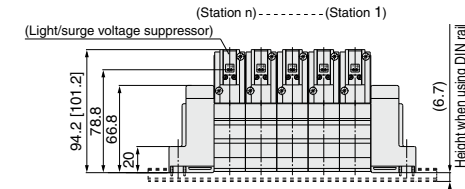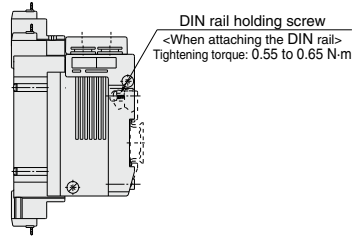


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 137.5 | 162.5 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 117 | 141 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 103 | 127 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |


L plug connector (L)




M plug connector (M)



DIN terminal (D, Y)

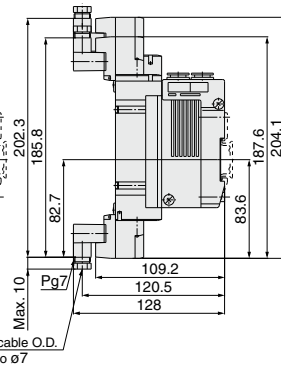

M8 connector (WO)




Note) Refer to page 642 for dimensions of connector types.

SY9000: SS5Y9-43- Stations B ^{02, C8, N9} _{03, C10, N11} **(-D)**


[] : AC

Grommet (G)


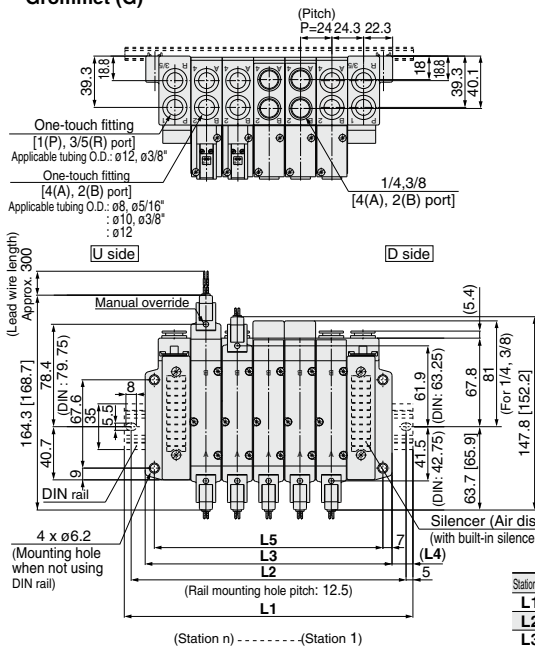


* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.

With External Pilot Specifications

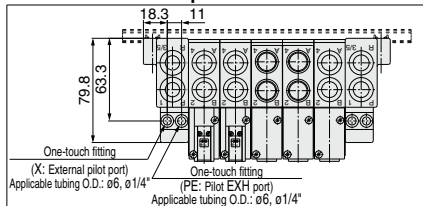


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

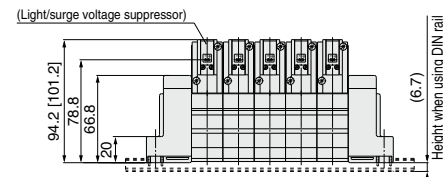


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 137.5 | 162.5 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 117 | 141 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 15.5 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 103 | 127 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 360.5 | 385.5 | 410.5 | 435.5 | 460.5 | 485.5 | 510.5 | 535.5 | 560.5 | 573 |
| L2 | 350 | 375 | 400 | 425 | 450 | 475 | 500 | 525 | 550 | 562.5 |
| L3 | 333 | 357 | 381 | 405 | 429 | 453 | 477 | 501 | 525 | 549 |
| L4 | 14 | 14.5 | 15 | 15.5 | 16 | 16.5 | 17 | 17.5 | 18 | 12 |
| L5 | 319 | 343 | 367 | 391 | 415 | 439 | 463 | 487 | 511 | 535 |


L plug connector (L)



M plug connector (M)




DIN terminal (D, Y)



Applicable cable O.D.
 $\phi 3.5$ to $\phi 7$

M8 connector (WO)



Note) Refer to page 642 for dimensions of connector types.

5 Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Flat Ribbon Cable **SY3000/5000/7000 Series**

Note) CE-compliant:
For DC only. [Option]



Type **41P**
Type **42P**

How to Order Manifold

Type 41P/Compact type

SS5Y 5 - 41P - 05 - C8 [] [] []

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Stations

| | |
|----|-------------|
| 03 | 3 stations |
| : | : |
| 12 | 12 stations |

* SS5Y3 has 4 to 12 stations.
* This also includes the number of blanking plate assemblies.

A, B port size
Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |

Thread type

| | Nil | Rc | CE-compliant |
|---|------|----|--------------|
| F | F | G | — |
| N | NPT | Q | CE-compliant |
| T | NPTF | Q | CE-compliant |

Note) CE-compliant: For DC only.

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|---|-------------------|
| N3 | One-touch fitting for ø ⁹ / ₃₂ | SY3000 |
| N7 | One-touch fitting for ø ¹ / ₄ " | SY3000 |
| N7 | One-touch fitting for ø ¹ / ₄ " | SY5000 |
| N9 | One-touch fitting for ø ⁵ / ₁₆ | SY5000 |

Type 42P/Common external pilot capable

SS5Y 5 - 42P - 05 - C8 [] [] []

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Stations

| | |
|----|-------------|
| 03 | 3 stations |
| : | : |
| 12 | 12 stations |

* SS5Y3 has 4 to 12 stations.
* This also includes the number of blanking plate assemblies.

A, B port size
Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01 | 1/8 | SY3000 |
| 02 | 1/4 | SY5000 |
| 02 | 1/4 | SY7000 |

Thread type

| | Nil | Rc | CE-compliant |
|---|------|----|--------------|
| F | F | G | — |
| N | NPT | Q | CE-compliant |
| T | NPTF | Q | CE-compliant |

Note) CE-compliant: For-DC only.

One-touch fitting (Metric size)


| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|---|-------------------|
| N3 | One-touch fitting for ø ⁹ / ₃₂ | SY3000 |
| N7 | One-touch fitting for ø ¹ / ₄ " | SY3000 |
| N7 | One-touch fitting for ø ¹ / ₄ " | SY5000 |
| N9 | One-touch fitting for ø ⁵ / ₁₆ | SY5000 |
| N11 | One-touch fitting for ø ³ / ₈ " | SY7000 |

How to Order Manifold Assembly (Example)

Example

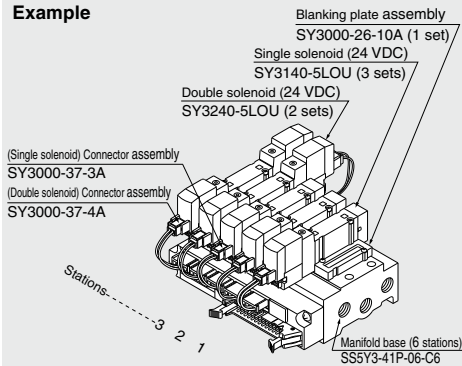

- SS5Y3-41P-06-C6... 1 set (Type 41P, 6-station manifold base part no.)**
*** SX3000-26-10A..... 1 set (Blanking plate assembly part no.)**
*** SY3140-5LOU..... 3 sets (Single solenoid part no.)**
*** SY3240-5LOU..... 2 sets (Double solenoid part no.)**
*** SY3000-37-3A..... 3 sets (Connector assembly part no.)**
*** SY3000-37-4A..... 2 sets (Connector assembly part no.)**

The asterisk denotes the symbol for assembly.
Prefix it to the part nos. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 507) that connects the valve and the manifold.



Note) CE-compliant:
For DC only. [Option]

How to Order Valve

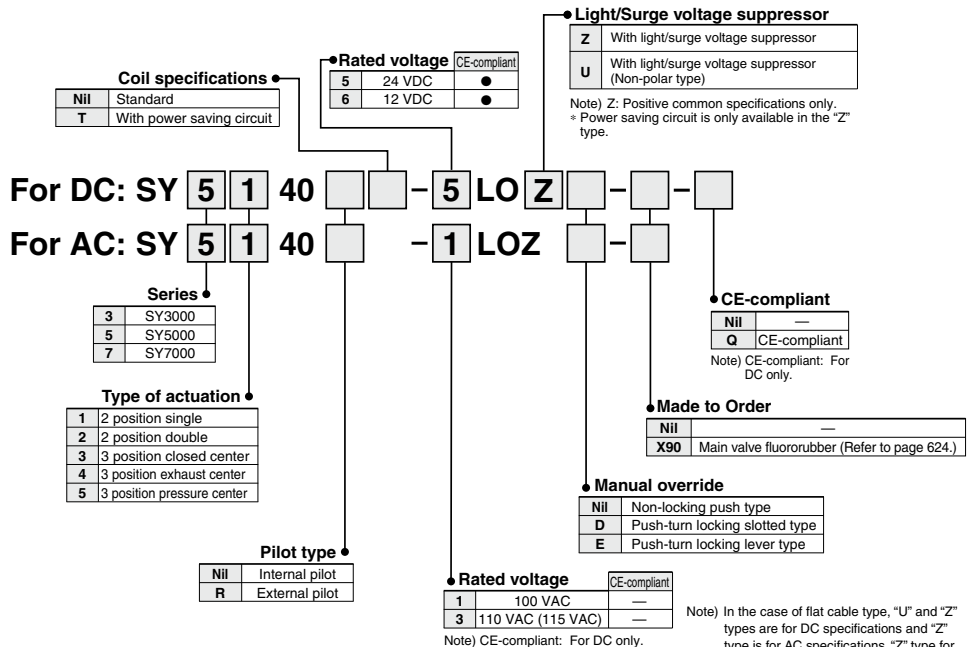

SY
S0700
S0700

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" type for DC is positive common specification only. For the other combination, please contact SMC.

Note) Since the electrical entry is "LO", select an appropriate connector assembly part no.

Connector Assembly

For 12, 24 VDC

| Specifications | For SY3000 | For SY5000/7000 |
|---|--------------|-----------------|
| For single solenoid | SY3000-37-3A | SY5000-37-3A |
| Double solenoid, 3 position type | SY3000-37-4A | SY5000-37-4A |
| Single with spacer assembly | SY5000-37-3A | SY5000-37-5A |
| Double, 3 position with spacer assembly | SY3000-37-6A | SY5000-37-6A |

Note) Spacer assembly indicates Individual SUP/EXH spacer.

For 100 VAC

| Specifications | For SY3000 | For SY5000/7000 |
|---|---------------|-----------------|
| For single solenoid | SY3000-37-32A | SY5000-37-15A |
| Double solenoid, 3 position type | SY3000-37-33A | SY5000-37-16A |
| Single with spacer assembly | SY5000-37-15A | SY5000-37-17A |
| Double, 3 position with spacer assembly | SY3000-37-34A | SY5000-37-18A |

For 100 VAC (115 VAC)


| Specifications | For SY3000 | For SY5000/7000 |
|---|---------------|-----------------|
| For single solenoid | SY3000-37-35A | SY5000-37-19A |
| Double solenoid, 3 position type | SY3000-37-36A | SY5000-37-20A |
| Single with spacer assembly | SY5000-37-19A | SY5000-37-21A |
| Double, 3 position with spacer assembly | SY3000-37-37A | SY5000-37-22A |

Flat Ribbon Cable Manifold Specifications

• **Multiple valve wiring is simplified through the use of the flat cable connector.**

• **Clean appearance**

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



| | | | | | |
|--|---|--|---|---|---|
| Model | SS5Y3-41P(-Q) | SS5Y3-42P(-Q) | SS5Y5-41P(-Q) | SS5Y5-42P(-Q) | SS5Y7-42P(-Q) |
| Applicable valve | SY3□40 | | SY5□40 | | SY7□40 |
| Manifold type | Single base/B mount | | | | |
| P(SUP)/R(EXH) | Common SUP, Common EXH | | | | |
| Valve stations | 4 to 12 stations ⁽¹⁾ | | 3 to 12 stations ^(Note 1) | | |
| A, B port | Location | Base | | | |
| | Porting specifications | Side | | | |
| Port size | P, EA, EB port | 1/8 | | 1/4 | |
| | A, B port | MS x 0.8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | 1/8 C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | 1/8 C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | 1/4 C8 (One-touch fitting for ø8) C8 (One-touch fitting for ø8) |
| Manifold base weight W (g), n: Stations | W = 39n + 83 | W = 48n + 99 | W = 67n + 118 | W = 88n + 151 | W = 109n + 174 |
| Applicable flat ribbon cable connector | Flat ribbon cable connector, Socket: 26 pins MIL type with strain relief, Conforming to MIL-C-83503 | | | | |
| Internal wiring | In common between +COM and -COM (Z type: +COM only). | | | | |
| Rated voltage ^(Note 4) | 12, 24 VDC, 100, 110 VAC | | | | |

Note 1) For more than 10 stations (more than 5 stations in case of SS5Y7), supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 530.


Note 4) CE-compliant: For DC only.

Flow Rate Characteristics


| Model | Port size | | Flow rate characteristics | | | | | |
|-----------|------------------------|----------------|------------------------------|------|------|------------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /(s·bar)) | b | Cv | C (dm ³ /(s·bar)) | b | Cv |
| SS5Y3-41P | 1/8 | C6 | 0.75 | 0.19 | 0.18 | 0.81 | 0.23 | 0.20 |
| SS5Y3-42P | 1/8 | C6 | 0.75 | 0.20 | 0.18 | 0.82 | 0.20 | 0.20 |
| SS5Y5-41P | 1/4 | C8 | 1.8 | 0.23 | 0.44 | 1.9 | 0.16 | 0.45 |
| SS5Y5-42P | 1/4 | C8 | 1.9 | 0.20 | 0.46 | 1.9 | 0.12 | 0.43 |
| SS5Y7-42P | 1/4 | C10 | 3.0 | 0.25 | 0.75 | 3.0 | 0.12 | 0.66 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

Internal Wiring of Manifold

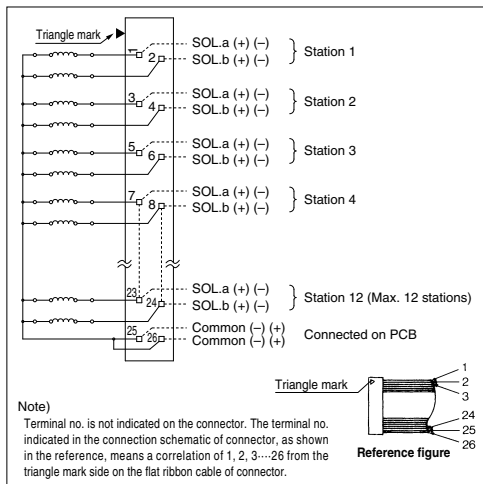

- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.




Caution




- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.

SY3000: SS5Y3-41P-Stations -M5, C4, N3, C6, N7



[]: AC

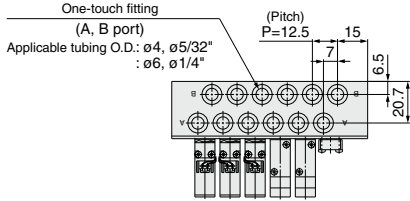

For M5 x 0.8

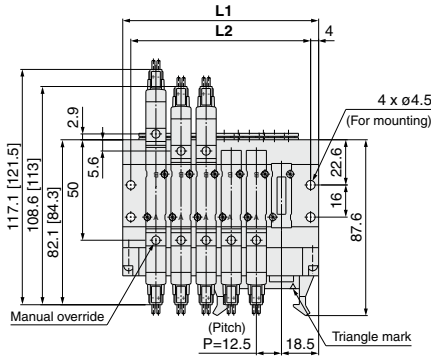

With interface regulator (with gauge)



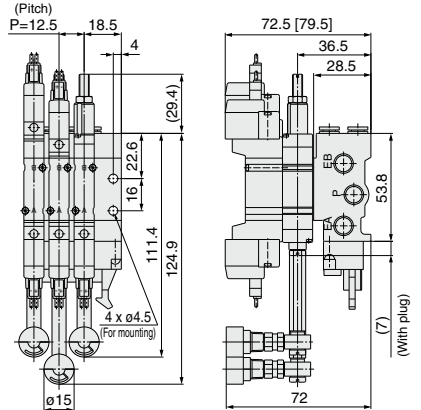
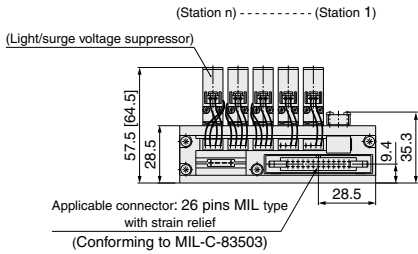


| Stations n | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|------|----|------|-----|-------|-----|-------|-----|-------|
| L1 | 72.5 | 85 | 97.5 | 110 | 122.5 | 135 | 147.5 | 160 | 172.5 |
| L2 | 64.5 | 77 | 89.5 | 102 | 114.5 | 127 | 139.5 | 152 | 164.5 |


SJ
SY
SY
S0700
S0700

SY5000: SS5Y5-41P-Stations -01, C6,N7, C8,N9


[] : AC

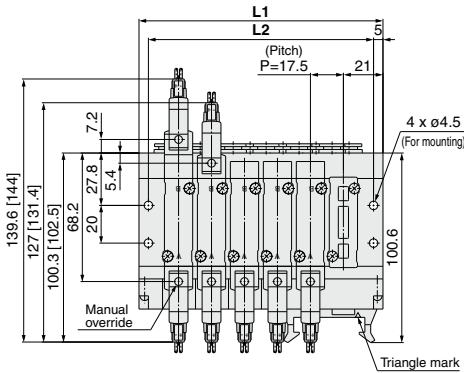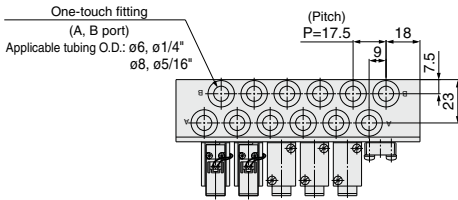

(Station n) ----- (Station 1)

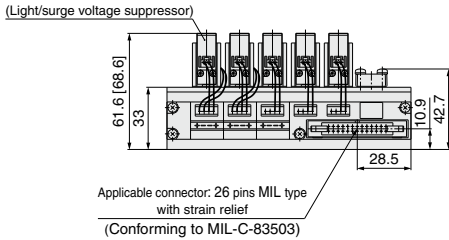






With interface regulator (with gauge)

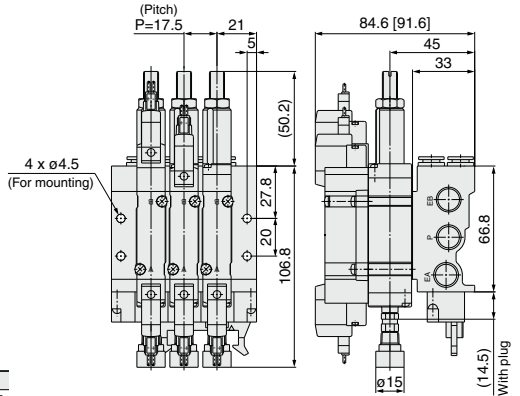


| Stations n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| L1 | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 |
| L2 | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 |

SY3000: SS5Y3-42P-Stations -01, C4, N3
C6, N7

[]: AC

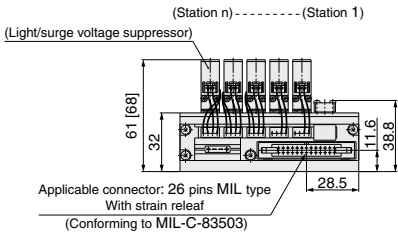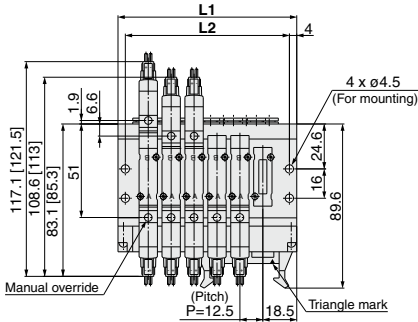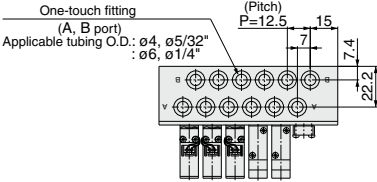

With interface regulator (with gauge)

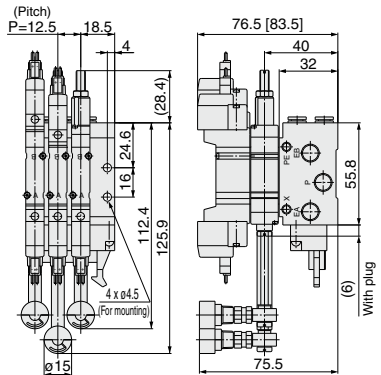


| Stations n | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|------|----|------|-----|-------|-----|-------|-----|-------|
| L1 | 72.5 | 85 | 97.5 | 110 | 122.5 | 135 | 147.5 | 160 | 172.5 |
| L2 | 64.5 | 77 | 89.5 | 102 | 114.5 | 127 | 139.5 | 152 | 164.5 |

SJ
SY
SY
S0700
S0700




SY5000: SS5Y5-42P- Stations -02 ^{C6, N7} _{, C8, N9}

[] : AC

Grommet (G)

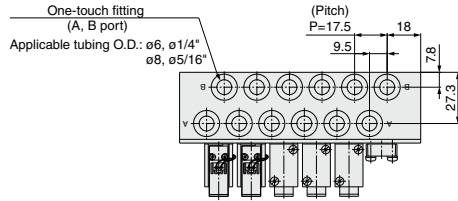


For 1/4

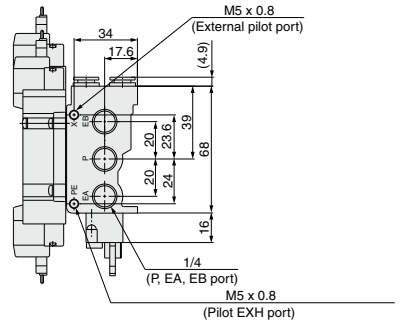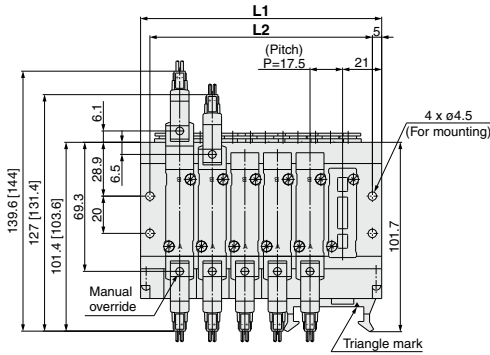


<In the case of external pilot type solenoid valve>

(Station n) ----- (Station 1)
(Light/surge voltage suppressor)

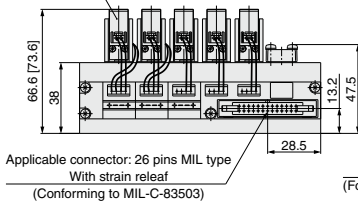

With interface regulator (with gauge)

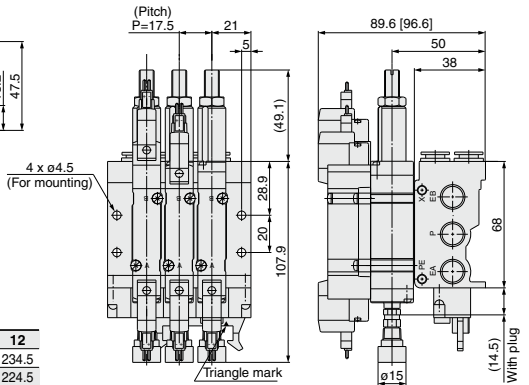


| Stations n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| L1 | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 |
| L2 | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 |




SY7000: SS5Y7-42P- Stations -02, C10, N11

[]: AC

Grommet (G)

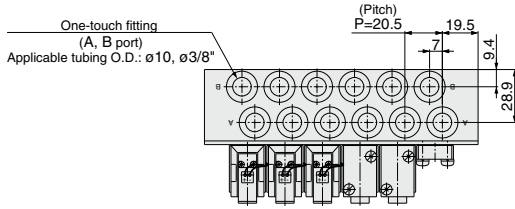


For $1/4$

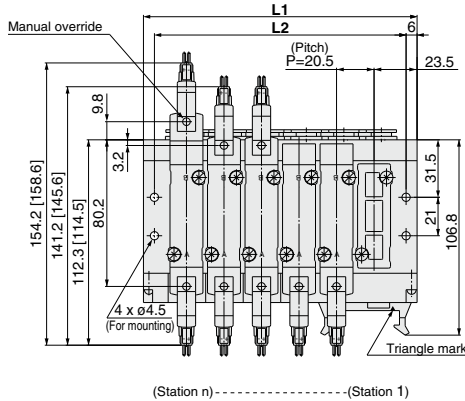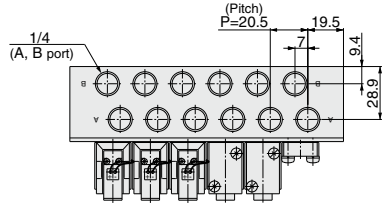


<In the case of external pilot type solenoid valve>

(Light/surge voltage suppressor)

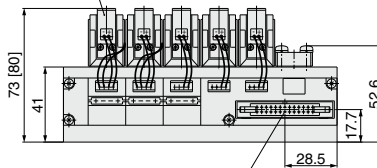

Applicable connector: 26 pins MIL type
With strain relief
(Conforming to MIL-C-83503)

With interface regulator (with gauge)

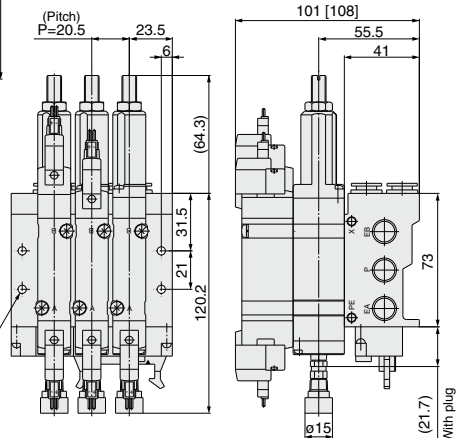

| Stations n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| L1 | 88 | 108.5 | 129 | 149.5 | 170 | 190.5 | 211 | 231.5 | 252 | 272.5 |
| L2 | 76 | 96.5 | 117 | 137.5 | 158 | 178.5 | 199 | 219.5 | 240 | 260.5 |


Type **43P**

5 Port Solenoid Valve Base Mounted Manifold Stacking Type/Flat Ribbon Cable **SY9000 Series**



[Option]
Note) CE-compliant:
For DC only.

How to Order Manifold



Manifold series
9 SY9000

Valve stations

| Symbol | Stations |
|--------|-------------|
| 04 | 4 stations |
| ⋮ | ⋮ |
| 12 | 12 stations |

* This also includes the number of blanking plate assemblies.

P, R port outlets

| Symbol | Port outlet | Applicable stations |
|--------|-------------|---------------------|
| U | U side | 4 to 10 stations |
| D | D side | 4 to 10 stations |
| B | Both sides | 4 to 12 stations |

SUP/EXH block assembly specifications

| Symbol | Specifications |
|--------|---------------------------------------|
| NII | Standard/Internal pilot specification |
| R | External pilot specification |
| S | Internal pilot/Built-in silencer |
| RS | External pilot/Built-in silencer |

Thread type

| | |
|-----|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Option

| Symbol | Mounting |
|--------|---|
| NII | Direct mounting |
| D | DIN rail mounting (with DIN rail) |
| D0 | DIN rail mounting (without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |

A, B port size

| Symbol | Port size |
|--------|-----------|
| 02 | 1/4 |
| 03 | 3/8 |

One-touch fitting (Metric size)

| Symbol | Port size |
|--------|---------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| C12 | One-touch fitting for ø12 |
| M | Mixed |

One-touch fitting (Inch size)

| Symbol | Port size |
|--------|--|
| N9 | One-touch fitting for ø ⁵ / ₁₆ " |
| N11 | One-touch fitting for ø ³ / ₈ " |
| M | Mixed |

* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.


CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Note) CE-compliant: For DC only.

How to Order Manifold Assembly (Example)

Example

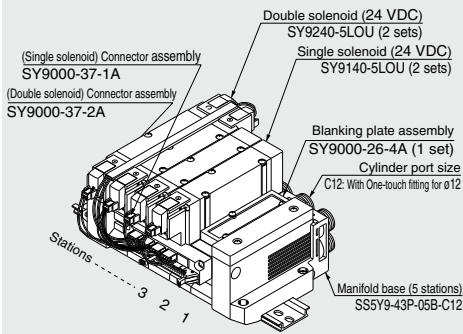

SS5Y9-43P-05B-C12 ... 1 set (Type 43P, 5-station manifold base part no.)
 * SY9000-26-4A 1 set (Blanking plate assembly part no.)
 * SY9140-5LOU 2 sets (Single solenoid part no.)
 * SY9240-5LOU 2 sets (Double solenoid part no.)
 * SY9000-37-1A 2 sets (Connector assembly part no.)
 * SY9000-37-2A 2 sets (Connector assembly part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Note) Please indicate the connector assembly part no. (page 515) that connects the valve and the manifold.



Note) CE-compliant:
For DC only. [Option]

How to Order Valve

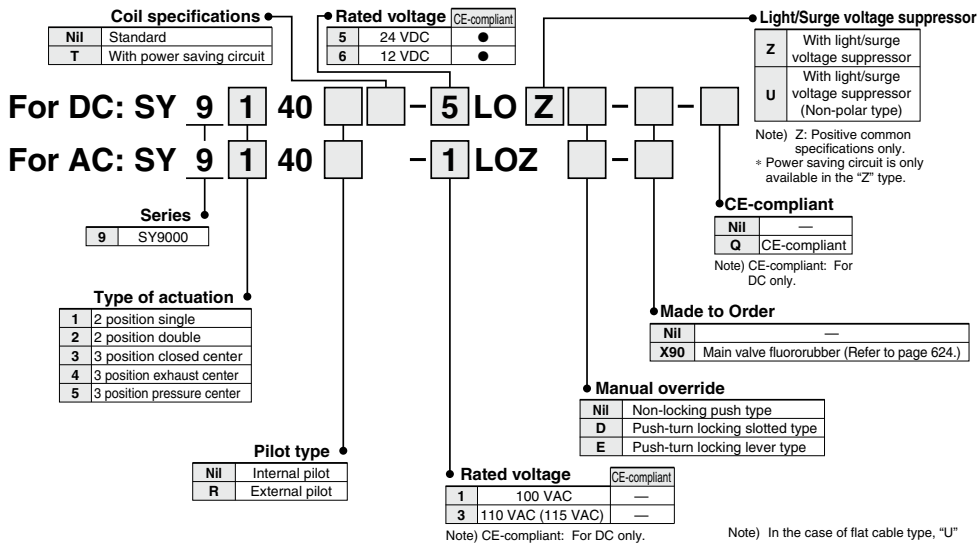

SJ
SY
SY
S0700
S0700

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note) In the case of flat cable type, "U" and "Z" types are for DC specifications and "Z" type is for AC specifications. "Z" type for DC is positive common specification only. For the other combination, please contact SMC.

Note) Since the electrical entry is "LO", select an appropriate connector assembly part no.

Connector Assembly

For 12, 24 VDC

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1A |
| Double solenoid, 3 position type | SY9000-37-2A |
| Single with spacer assembly | SY9000-37-3A |
| Double, 3 position with spacer assembly | SY9000-37-4A |

Note) Spacer indicates Individual SUP/EXH spacer.

For 100 VAC

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1B |
| Double solenoid, 3 position type | SY9000-37-2B |
| Single with spacer assembly | SY9000-37-3B |
| Double, 3 position with spacer assembly | SY9000-37-4B |


For 110 VAC (115 VAC)

| Specifications | For SY9000 |
|---|--------------|
| For single solenoid | SY9000-37-1C |
| Double solenoid, 3 position type | SY9000-37-2C |
| Single with spacer assembly | SY9000-37-3C |
| Double, 3 position with spacer assembly | SY9000-37-4C |

- **Multiple valve wiring is simplified through the use of the flat ribbon cable connector.**

• **Clean appearance**

In the case of a flat ribbon cable type, each valve is wired on the print board of manifold base to allow the external wiring to be piped all together with 26 pins MIL connector.



Flat Ribbon Cable Manifold Specifications

| | | | |
|---|----------------|---|--|
| Model | | SS5Y9-43P | |
| Applicable valve | | SY9□40 | |
| Manifold type | | Stacking type | |
| P (SUP)/R (EXH) | | Common SUP, Common EXH | |
| Valve stations | | 4 to 12 stations ^{Note 1)} | |
| A, B port | Location | Base | |
| | Direction | Side | |
| Porting specifications | P, EA, EB port | C12 (One-touch fitting for ø12) | |
| | A, B port | $\frac{1}{4}$ $\frac{3}{8}$ C8 (One-touch fitting for ø8) C10 (One-touch fitting for ø10) C12 (One-touch fitting for ø12) | |
| Manifold base weight W (g) n: Stations | | W = 114n + 343 | |
| Applicable flat ribbon cable connector | | Flat ribbon cable connection, Socket: 26 pins MIL with strain relief, Conforming to MIL-C-83503 | |
| Internal wiring | | In common between +COM and -COM (Z type: +COM only) | |
| Rated voltage ^{Note 4)} | | 12, 24 VDC, 100, 110 VAC | |

Note 1) For more than 10 stations, supply pressure to P port on both sides and exhaust from EA/EB port on both sides.

Note 2) The withstand voltage specification for the wiring unit section is JIS C 0704, Grade 1 or its equivalent.

Note 3) Refer to "Manifold Option" on page 530.


Note 4) CE-compliant: For DC only.

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|-----------|------------------------|----------------|----------------------------|------|-----|----------------------------|------|-----|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s·bar) | b | Cv | C (dm ³ /s·bar) | b | Cv |
| SS5Y9-43P | C12 | C12 | 6.4 | 0.29 | 1.6 | 7.3 | 0.29 | 1.8 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.


Internal Wiring of Manifold (Non-polar type)

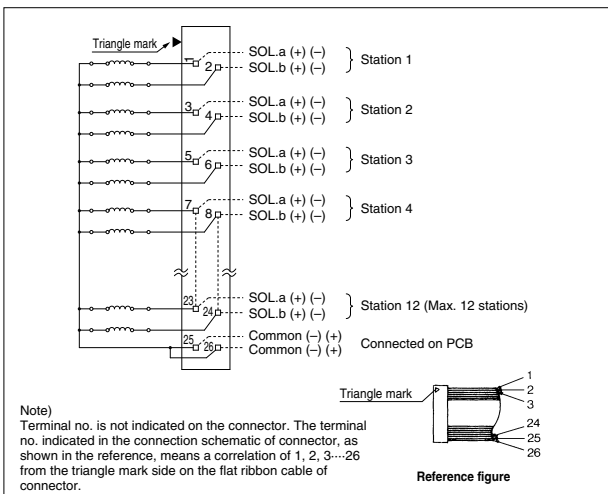

Caution

- For non-polar (U) valves, the electrical DC connections can be used with either positive and negative COM. For type (Z), only use with positive COM as the valve does not operate correctly when used with negative COM.


- For more than 10 stations, both poles of the common should be wired.
- For single solenoid, connect to the solenoid A side.
- The maximum number of stations that can be accommodated is 12. For more stations, please contact SMC.




SY9000: SS5Y9-43P-Stations D ⁰² C8, N9 ⁰³ C10, N11 (-D)

[] : AC




* When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.

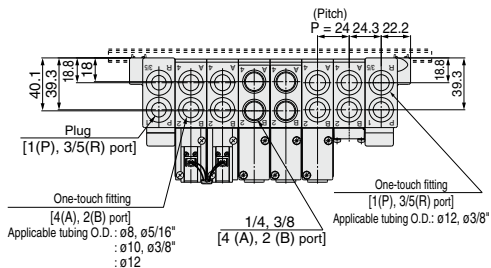

With External Pilot Specifications

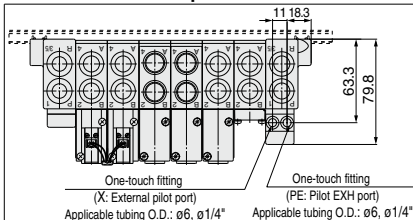


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

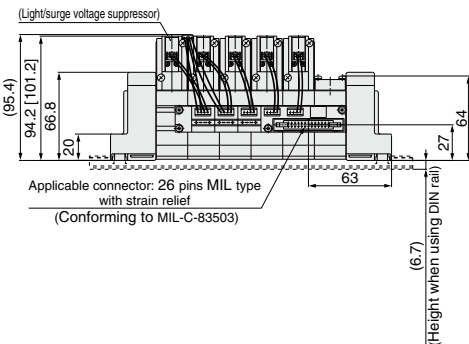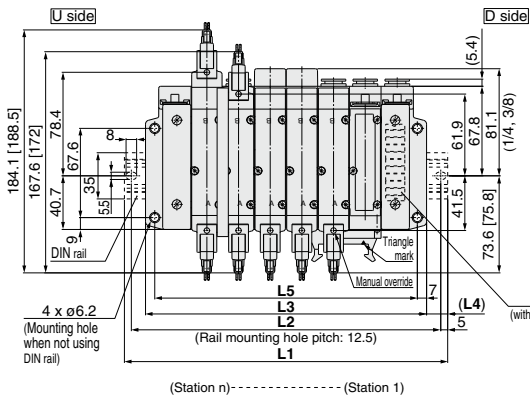


| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------------|
| L1 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |

SJ
SY
SY
S0700
S0700



* When P, R port outlets are indicated on the U side, the P, R ports on the opposite side are plugged.

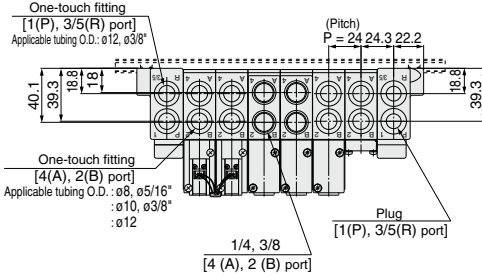

With External Pilot Specifications

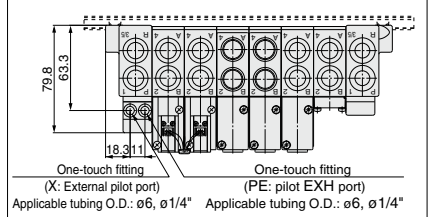


* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the U side.

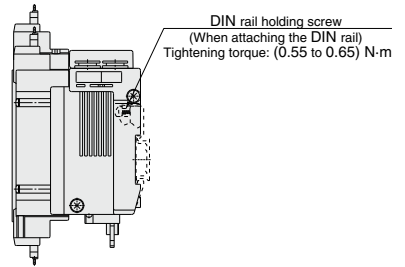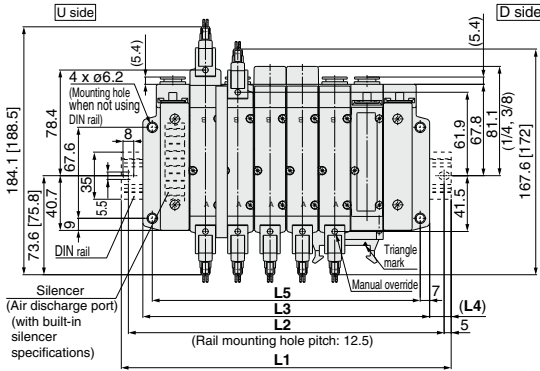

(Station n) ----- (Station 1)

(Light/surge voltage suppressor)

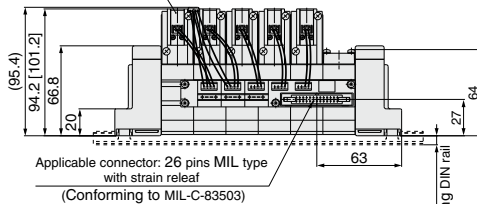


| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------------|
| L1 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |


SY9000: SS5Y9-43P- Stations B ⁰² C8, N9 ₀₃ C10, N11 (-D)

[]: AC



* When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.

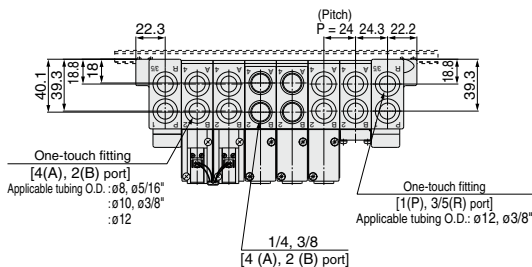


With External Pilot Specifications

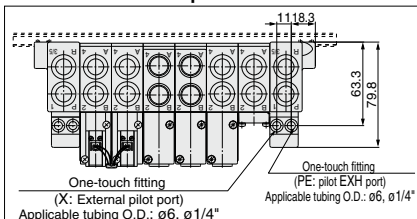

* Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

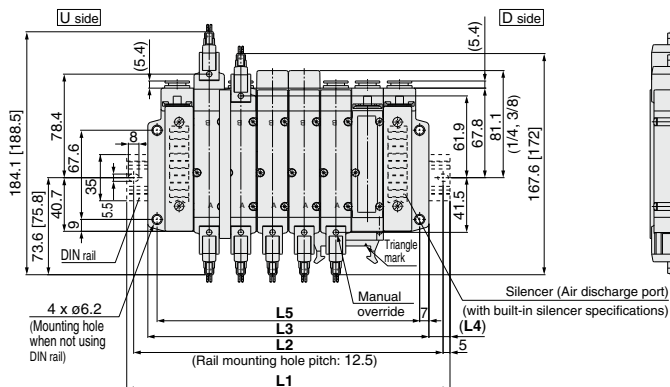

(Station n)------(Station 1)

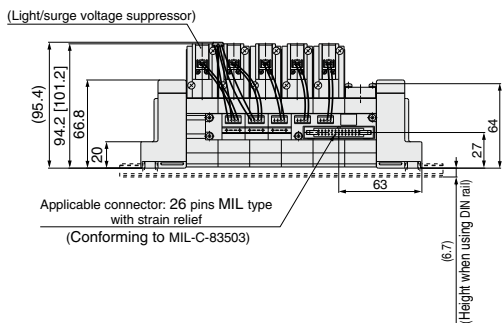

| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 | 360.5 | 385.5 |
| L2 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 | 350 | 375 |
| L3 | 165 | 189 | 213 | 237 | 261 | 285 | 309 | 333 | 357 |
| L4 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 | 14 | 14.5 |
| L5 | 151 | 175 | 199 | 223 | 247 | 271 | 295 | 319 | 343 |

Type **42SA**

EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Integrated Type **SY3000/5000/7000 Series**



How to Order Manifold

SS5Y 3 - 42SA - 03 - 01 - -

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

SI unit

| | |
|-----|--------------------|
| Nil | NPN output (+COM.) |
| N | PNP output (-COM.) |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---|
| 03 | 3 stations | Double wiring ^{Note 1)} |
| : | : | |
| 08 | 8 stations | Specified layout ^{Note 2)} (Compatible with 16 solenoid valves) |
| 03 | 3 stations | |
| : | : | |
| 16 | 16 stations | |

- SS5Y3 can be set from 4 stations.
- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

A, B port size

Thread piping

| | | |
|----|-----|-------------|
| 01 | 1/8 | SY3000 |
| 02 | 1/4 | SY5000/7000 |

One-touch fitting (Metric size)


| | | |
|-----|---------------------------|--------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C10 | One-touch fitting for ø10 | SY7000 |

One-touch fitting (Inch size)

| | | |
|-----|------------------------------|--------|
| N3 | One-touch fitting for ø5/32" | SY3000 |
| N7 | One-touch fitting for ø1/4" | SY3000 |
| N9 | One-touch fitting for ø1/4" | SY5000 |
| N11 | One-touch fitting for ø3/8" | SY7000 |

How to Order Manifold Assembly (Example)

Example

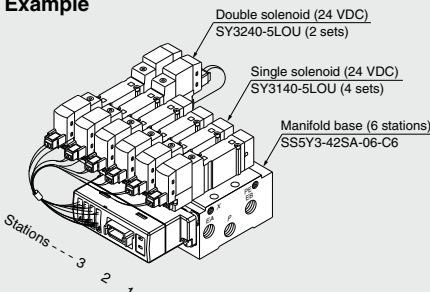

SS5Y3-42SA-06-C6 1 set (42SA type 6-station manifold part no.)
 SY3140-5LOU 4 sets (Single solenoid part no.)
 SY3240-5LOU 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|--------|------------------------|------------------|-------|
| Nil | NPN output (+COM.) | EX510-S001 | P.897 |
| N | PNP output (-COM.) | EX510-S101 | |

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>



How to Order Valves

SY 3 1 40 **- 5 LO Z**

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot specifications

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---------------------------|
| Nil | Standard |
| T | With power saving circuit |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

| | |
|---|--|
| Z | With light/surge voltage suppressor |
| U | With light/surge voltage suppressor (non-polar type) |

Note 1) Power saving circuit is only available in the "Z" type.

Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

Rated voltage: 24 VDC




SJ
SY
SY
S0700
S0700

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.



Dimensions

SY3000: SS5Y3-42SA □ - Stations -01 □, C4, N3
C6, N3



For 1/8"

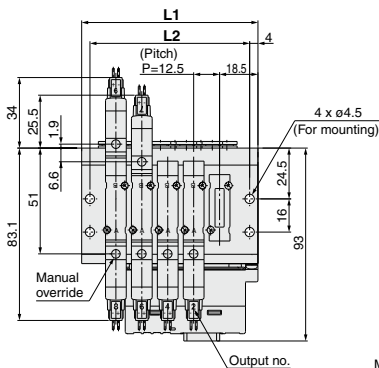

(Station n) ----- (Station 1)

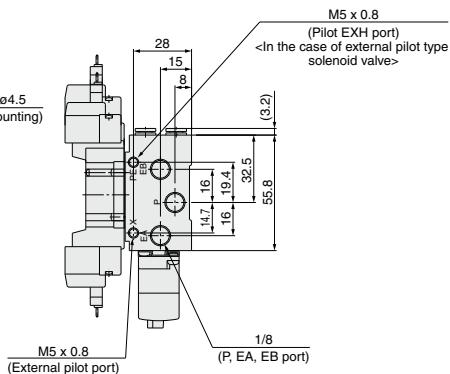


With interface regulator (with gauge)


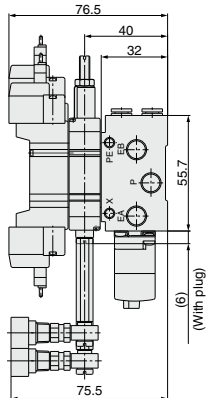
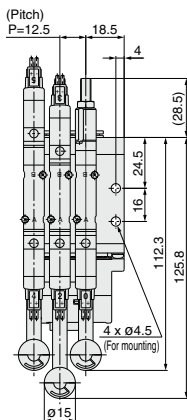


| Stations n | 4 stations | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 72.5 | 85 | 97.5 | 110 | 122.5 | 135 | 147.5 | 160 | 172.5 | 185 | 197.5 | 210 | 222.5 |
| L2 | 64.5 | 77 | 89.5 | 102 | 114.5 | 127 | 139.5 | 152 | 164.5 | 177 | 189.5 | 202 | 214.5 |

SY5000: SS5Y5-42SA -Stations-02 C6, N7
C8, N9




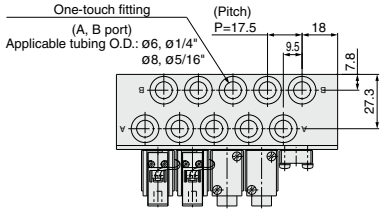


For 1/4

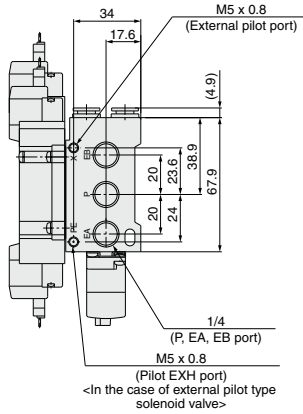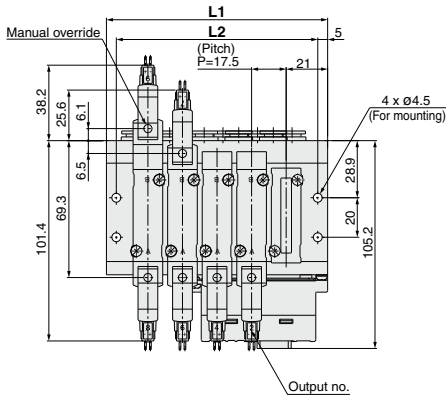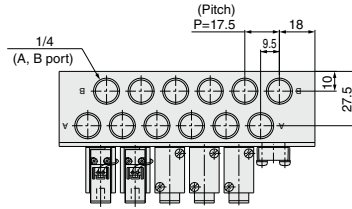


Dimensions

SY7000: SS5Y7-42SA □ - Stations -02 □, C10, N11

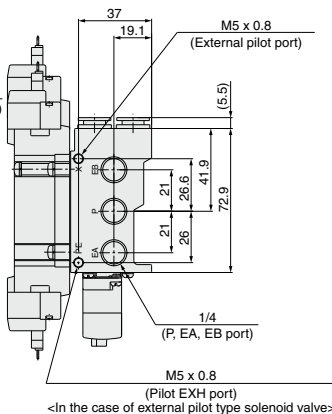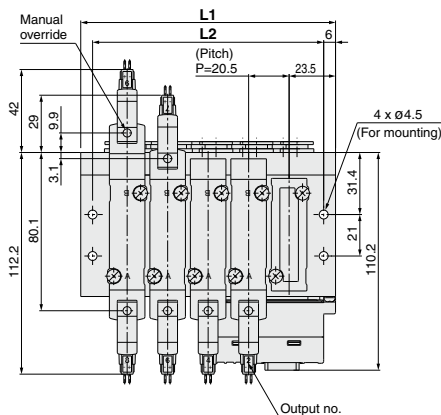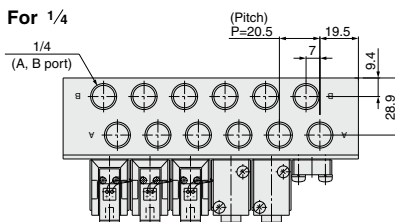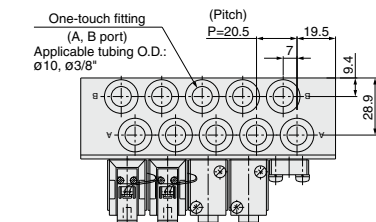

<In the case of external pilot type solenoid valve>


(Station n) ----- (Station 1)

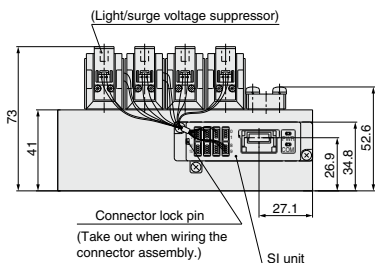

Connector lock pin
(Take out when wiring the
connector assembly.)

ST unit

With interface regulator (with gauge)

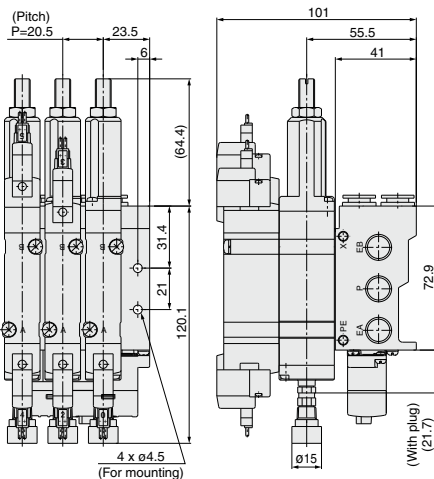

4 x 04.5
(For mounting)

(With plug)
(21.7)

| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------------|
| L1 | 88 | 108.5 | 129 | 149.5 | 170 | 190.5 | 211 | 231.5 | 252 | 272.5 | 293 | 313.5 | 334 | 354.5 |
| L2 | 76 | 96.5 | 117 | 137.5 | 158 | 178.5 | 199 | 219.5 | 240 | 260.5 | 281 | 301.5 | 322 | 342.5 |

Type **43SA**

EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type **SY9000 Series**



How to Order Manifold

SS5Y9 - 43SA [] - **03** **U** [] - **02** [] - [] - []

SI unit

| | |
|------------|--------------------|
| NII | NPN output (+COM.) |
| N | PNP output (-COM.) |

CE-compliant

| | |
|------------|--------------|
| NII | — |
| Q | CE-compliant |

Valve stations

| Symbol | Stations | Note |
|-----------|-------------|---|
| 03 | 3 stations | Double wiring ^{Note 1)} |
| ⋮ | ⋮ | |
| 08 | 8 stations | Specified layout ^{Note 2)} (Compatible with 16 solenoid valves) |
| 03 | 3 stations | |
| ⋮ | ⋮ | |
| 16 | 16 stations | |

- The number of the blanking plate assembly is also included.
- Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

Option

| | |
|------------|---|
| NII | Direct mounting |
| D | DIN rail mounting (With DIN rail) |
| DO | DIN rail mounting (Without DIN rail) |
| D* | When a longer DIN rail is desired than the specified stations, specify the station number to be required into * mark. |

Thread type

| | |
|------------|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

A, B port size

Thread piping

| | |
|-----------|-----|
| 02 | 1/4 |
| 03 | 3/8 |

One-touch fitting (Metric size)

| | |
|------------|---------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| C12 | One-touch fitting for ø12 |
| M | Mixed |

One-touch fitting (Inch size)

| | |
|------------|------------------------------|
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |
| M | Mixed |

- For the mixed specification, indicate separately on a manifold specification sheet.

SUP/EXH block assembly specifications

| | |
|------------|-----------------------------------|
| NII | Standard/Internal pilot |
| R | External pilot |
| S | Internal pilot, Built-in silencer |
| RS | External pilot, Built-in silencer |

P, R port outlets

| | | |
|----------|------------|------------------|
| U | U side | 3 to 10 stations |
| D | D side | 3 to 10 stations |
| B | Both sides | 3 to 16 stations |


SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|------------|------------------------|------------------|-------|
| NII | NPN output (+COM.) | EX510-S001 | P.897 |
| N | PNP output (-COM.) | EX510-S101 | |

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smworld.com>

How to Order Manifold Assembly (Order Example)

Example

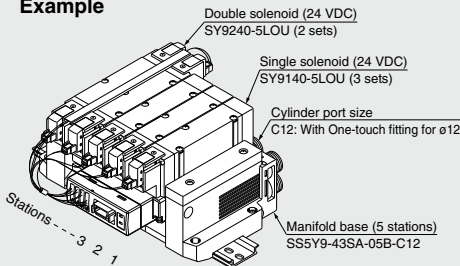

SS5Y9-43SA-05B-C12... 1 set (43SA type 5-station manifold part no.)
SY9140-5LOU **3 sets** (Single solenoid part no.)
SY9240-5LOU **2 sets** (Double solenoid part no.)

—The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

How to Order Valves

SY9 1 40 [] [] - 5 LO Z [] - [] - []

Type of actuation

| | |
|----------|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot specifications

| | |
|------------|----------------|
| Nii | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|------------|---------------------------|
| Nii | Standard |
| T | With power saving circuit |

Rated voltage: 24 VDC

CE-compliant

| | |
|------------|--------------|
| Nii | — |
| Q | CE-compliant |

Made to Order

| | |
|------------|--|
| Nii | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|------------|--------------------------------|
| Nii | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

| | |
|----------|--|
| Z | With light/surge voltage suppressor |
| U | With light/surge voltage suppressor (non-polar type) |


Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Note 1) Power saving circuit is only available in the "Z" type.


Note 2) When the SI unit is the PNP output (-COM.), only the "U" type is available.

Dimensions




SY9000: SS5Y9-43SA □ - Stations D □ □ □ ^{C8, N9} _{C10, N11 (-D)} _{C12}

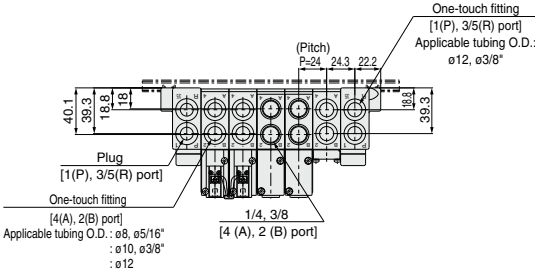

With External Pilot Specifications

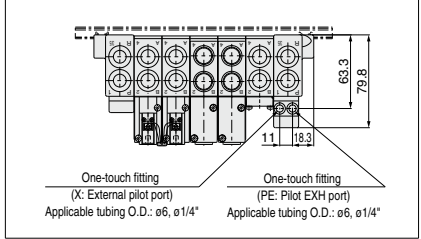


- When P, R port outlets are indicated on the D side, the P, R ports on the opposite side are plugged.
- Air discharge port on the built-in silencer type and the external pilot's extracting position are in the D side.

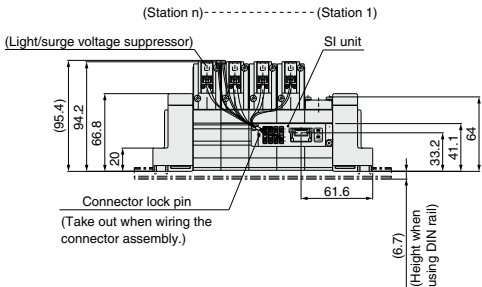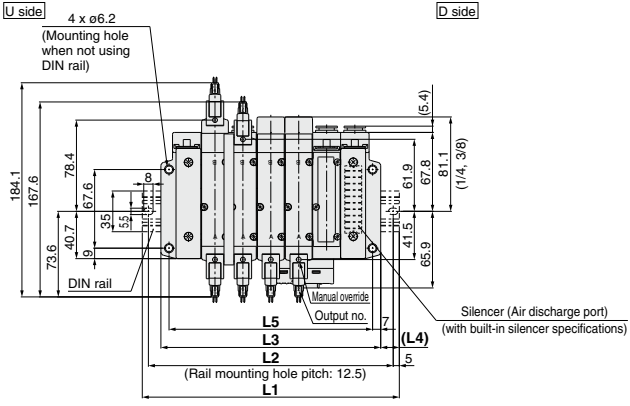


| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 |
| L2 | 162.5 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 |
| L3 | 141 | 165 | 189 | 213 | 237 | 261 | 285 | 309 |
| L4 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 |
| L5 | 127 | 151 | 175 | 199 | 223 | 247 | 271 | 295 |

SY9000: SS5Y9-43SA □ - Stations **B** □ □ □ □ $\frac{02}{03}$ □ □ □ □ **(-D)**

C8, N9
C10, N11 (-D)
C12

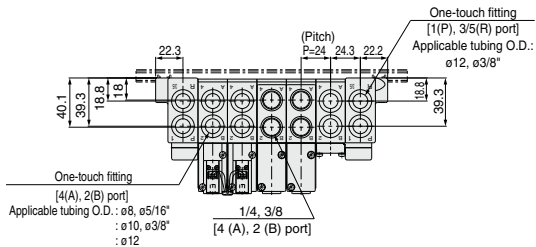



With External Pilot Specifications

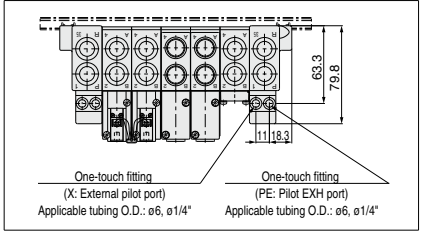


U side

D side

- * When P, R port outlets are indicated on the B side, the P, R ports on the both sides are in the open state.
- * Air discharge port on the built-in silencer type and the external pilot's extracting position are in the B side (both sides).

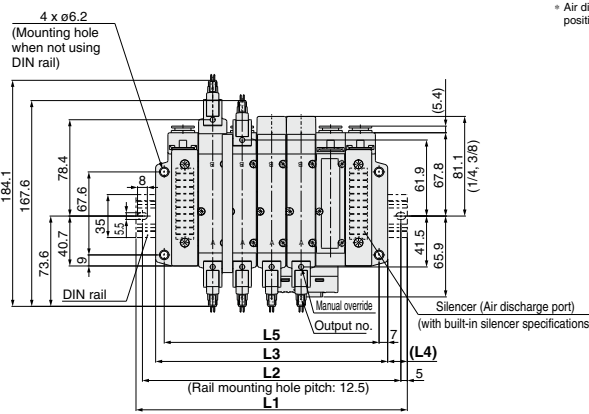


(Station n) ----- (Station 1)

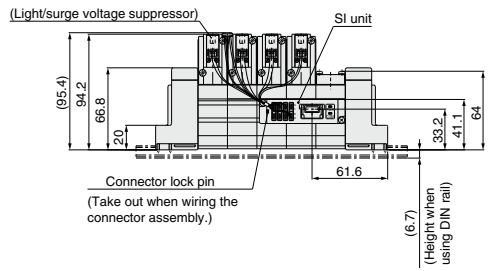

| Stations n | 3 stations | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 198 | 223 | 248 | 260.5 | 285.5 | 310.5 | 335.5 | 360.5 | 385.5 | 410.5 | 435.5 | 460.5 | 485.5 |
| L2 | 162.5 | 187.5 | 212.5 | 237.5 | 250 | 275 | 300 | 325 | 350 | 375 | 400 | 425 | 450 | 475 |
| L3 | 141 | 165 | 189 | 213 | 237 | 261 | 285 | 309 | 333 | 357 | 381 | 405 | 429 | 453 |
| L4 | 16 | 16.5 | 17 | 17.5 | 12 | 12.5 | 13 | 13.5 | 14 | 14.5 | 15 | 15.5 | 16 | 16.5 |
| L5 | 127 | 151 | 175 | 199 | 223 | 247 | 271 | 295 | 319 | 343 | 367 | 391 | 415 | 439 |


Manifold Option

■ Type 41, 42, 43, 42SA, 43SA Blanking plate assembly




| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-9A(-Q) |
| SY5000 | SY5000-26-20A(-Q) |
| SY7000 | SY7000-26-22A(-Q) |
| SY9000 | SY9000-26-2A(-Q) |

■ Type 41P, 42P, 43P Blanking plate assembly



| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SY3000-26-10A(-Q) |
| SY5000 | SY5000-26-21A(-Q) |
| SY7000 | SY7000-26-23A(-Q) |
| SY9000 | SY9000-26-4A(-Q) |


■ Gasket assembly part no.



| Series | Gasket assembly part no. |
|---------------|--------------------------|
| SY3000 | SY3000-GS-2 |
| SY5000 | SY5000-GS-2(-Q) |
| SY7000 | SY7000-GS-2(-Q) |
| SY9000 | SY9000-GS-2 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.


■ Individual SUP spacer assembly



| Series | Assembly part no. | Port size | t |
|---------------|--------------------|-----------|----|
| SY3000 | SY3000-38-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-38-16*A(-Q) | 1/8 | 15 |
| SY7000 | SY7000-38-16*A(-Q) | 1/4 | 18 |
| SY9000 | SY9000-38-2*A(-Q) | 1/4 | 20 |

Note) • The SUP port of SY3000, 5000 and 7000 may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)
• For the SY9000, it can only be used on the end plate side.


■ Individual EXH spacer assembly



| Series | Assembly part no. | Port size | t |
|---------------|--------------------|-----------|----|
| SY3000 | SY3000-39-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-39-16*A(-Q) | 1/8 | 15 |
| SY7000 | SY7000-39-16*A(-Q) | 1/4 | 18 |
| SY9000 | SY9000-39-2*A(-Q) | 1/4 | 20 |

Note) • In case of 41P, 42P and 43P, for protection of the wiring unit section from drainage, piping at the EA port should be arranged so that it will not be directly exposed to exhaust from the valve. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)
• For the SY9000, it can only be used on the end plate side.

■ Individual SUP spacer assembly + Individual EXH spacer assembly (Double spacer)

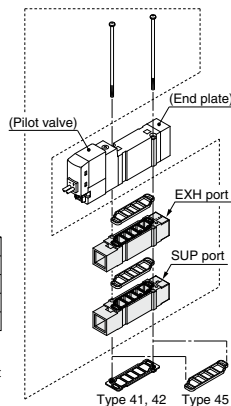

⚠ Caution

Mounting screw tightening torques

M2: 0.16 N·m
M3: 0.8 N·m
M4: 1.4 N·m

* Thread type

| NII | Rc |
|-----|------|
| F | G |
| N | NPT |
| T | NPTF |

⚠ Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

●: Available X: Not available —: Not applicable manifold)


| Series | Individual SUP + Individual EXP Assemble part no. | Port size | Applicable manifold types | | | | | | |
|---------------|---|-----------|---------------------------|-----|----|-----|----|--------------|-----|
| | | | 41 | 41P | 42 | 42P | 45 | 45-A 45-N | 45* |
| SY3000 | SY3000-120-2A(-Q) | M5 x 0.8 | ● | X | ● | X | ● | X | X |
| SY5000 | SY5000-75-1*A(-Q) | 1/8 | ● | X | ● | X | ● | X | X |
| SY7000 | SY7000-73-1*A(-Q) | 1/4 | ● | X | ● | X | — | — | — |

Note) The port on a spacer can be directed to the pilot valve side or end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. For mounting the port to the pilot valve side, please make sure to connect the ports to protect the pilot valve wiring section from drainage.
The individual SUP spacer and EXH spacer can be mounted either on the upper side or lower side. (The above illustration shows the condition when the product is shipped out from a factory.)


Manifold Option

■ Connector assembly

For single solenoid (SY3000-37-81A-□-N)



For double solenoid (SY3000-37-81A-□-□)




Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))
Integrated type

| Model | Part no. | Connector mounting position |
|------------|-------------------|--|
| SS5Y3-42SA | SY3000-37-81A-3-N | Single: For 1 to 4 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 4 stations |
| | SY3000-37-81A-2-N | Single: For 5 to 8 stations |
| | SY3000-37-81A-2-4 | Double/3 position: For 5 to 8 stations |
| SS5Y5-42SA | SY3000-37-81A-3-N | Single: For 1 to 8 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 8 stations |
| SS5Y7-42SA | SY3000-37-81A-3-N | Single: For 1 to 4 stations |
| | SY3000-37-81A-3-6 | Double/3 position: For 1 to 4 stations |
| | SY3000-37-81A-4-N | Single: For 5 to 8 stations |
| | SY3000-37-81A-4-7 | Double/3 position: For 5 to 8 stations |

Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly

SY3000-37-80A-□



■ Housing (8 pcs./set)

SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

| Model | Part no. | Connector mounting position |
|------------|------------------|-----------------------------|
| SS5Y3-42SA | SY3000-37-80A-3 | For A side |
| | SY3000-37-80A-6 | For B side |
| | SY3000-37-80A-4 | For A side |
| | SY3000-37-80A-7 | For B side |
| SS5Y5-42SA | SY3000-37-80A-3 | For A side |
| | SY3000-37-80A-6 | For B side |
| | SY3000-37-80A-7 | For A side |
| | SY3000-37-80A-9 | For B side |
| SS5Y7-42SA | SY3000-37-80A-4 | For A side |
| | SY3000-37-80A-7 | For B side |
| | SY3000-37-80A-8 | For A side |
| | SY3000-37-80A-11 | For B side |
| SS5Y9-43SA | SY3000-37-80A-6 | For A side |
| | SY3000-37-80A-11 | For B side |
| | SY3000-37-80A-9 | For A side |
| | SY3000-37-80A-14 | For B side |
| | SY3000-37-80A-13 | For A side |
| | SY3000-37-80A-18 | For B side |

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.

Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire. Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.

SJ
SY
SY
S0700
S0700

Manifold Option

■ SUP blocking disk (For SY9000)

By installing a SUP blocking disk in the pressure supply passage of a manifold base, it is possible to supply two or more different high and low pressures to one manifold.



| Series | No. |
|--------|--------------|
| SY9000 | SY9000-57-1A |

■ EXH blocking disk (For SY9000)

By installing an EXH blocking disk in the exhaust passage of a manifold base, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)




| Series | No. |
|--------|--------------|
| SY9000 | SY9000-57-1A |

■ Label for block disk (For SY9000)

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A


Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ Silencer with One-touch fitting (For SY9000)

The silencer plugs directly into the One-touch fittings of the manifold R (exhaust) port.




| For Series | Model | Effective area mm ² | A | B | C |
|--------------|----------|--------------------------------|-----|------|------|
| SY9000 (ø12) | AN30-C12 | 41 | ø20 | 43.5 | 71.5 |

■ DIN Rail Dimensions/Weight for SY9000

VZ1000-11-4-□

● Refer to L dimensions

* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.




| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|-------------|------|-------|------|-------|-------|-------|------|-------|-------|-------|
| L Dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| Weight (g) | 24.8 | 28 | 31.1 | 34.3 | 37.4 | 40.6 | 43.8 | 46.9 | 50.1 | 53.3 |
| No. | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| L Dimension | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 |
| Weight (g) | 56.4 | 59.6 | 62.7 | 65.9 | 69.1 | 72.2 | 75.4 | 78.6 | 81.7 | 84.9 |
| No. | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 |
| L Dimension | 348 | 360.5 | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 |
| Weight (g) | 88 | 91.2 | 94.4 | 97.5 | 100.7 | 103.9 | 107 | 110.2 | 113.3 | 116.5 |

Note) • Refer to page 640 for DIN rail.

• Refer to L1 dimension on pages 503 to 505, 517 to 519 and 527 to 529 for lengths that correspond to the number of manifold stations.

■ Cable assembly (For 41P, 42P, 43P)

AXT100-FC26-¹/₃

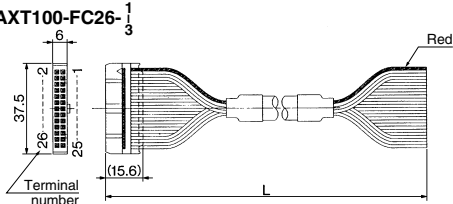

Connector Assembly for Flat Ribbon Cables

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|------------------------|
| 1.5m | AXT100-FC26-1 | Cable 26 core x 28 AWG |
| 3m | AXT100-FC26-2 | |
| 5m | AXT100-FC26-3 | |


* For other commercial connectors, use a 26 pins with strain relief conforming to MIL-C-83503.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- Japan Aviation Electronics Industry, Limited
- 3M Japan Limited
- J.S.T. Mfg. Co., Ltd.
- Fujitsu Limited

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size øD | Model | A | L | D |
|-----------------------------|---------|------|------|------|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 12 | KQ2P-12 | 24 | 44.5 | 14 |
| 1/8" | KQ2P-01 | 16 | 31.5 | 5 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |
| 3/8" | KQ2P-11 | 22 | 43 | 11.5 |

Manifold Option

How to Order Interface Regulator

SY3000 series

ARBY3000-05-P-2

Pressure gauge connection port

| | |
|-----------|--|
| 05 | Pressure gauge (G15-10-01) (for odd number station) |
| 06 | Pressure gauge (G15-10-01) (for even number station) |
| M1 | Plug (M-5P) |

Regulating port

| | |
|-----------|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

Note) In the case of the ARBY3000 series with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering with each others.

SY5000 series

ARBY5000-00-P-2

Pressure gauge connection port

| | |
|-----------|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |

Regulating port

| | |
|-----------|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |






ARBY3000-05-□-2
(For odd number stations)

ARBY3000-06-□-2
(For even number stations)

ARBY3000-M1-□-2

ARBY5000-00-□-2

ARBY5000-M1-□-2



Note) The M8 connector for wiring cannot be mounted for the ARBY3000 series.

SY7000 series

ARBY7000-00-P-2

Pressure gauge connection port

| | |
|-----------|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |



Regulating port

| | |
|-----------|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

Note) ARBY is not CE compliant.

ARBY7000-00-□-2

ARBY7000-M1-□-2



Accessory


| Series | Round head combination screw Reference screw size | Gasket |
|-----------------|--|-------------|
| ARBY3000 | SY3000-23-10 (M2 x 36) | SX3000-57-4 |
| ARBY5000 | AC00283 (M3 x 48.5) | SX5000-57-6 |
| ARBY7000 | AC00282 (M4 x 58) | SX7000-57-5 |

Caution

Mounting screw
tightening torques

- M2: 0.16 N·m
- M3: 0.8 N·m
- M4: 1.4 N·m

Base Mounted Manifold Exploded View

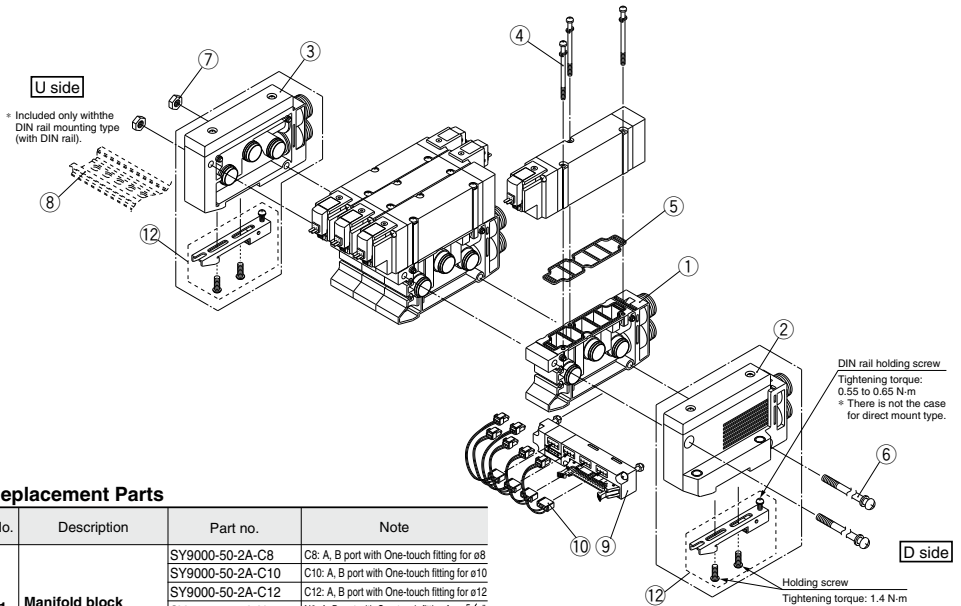


Replacement Parts

| No. | Description | Part no. | Note |
|-----|------------------------------|------------------|--|
| 1 | Manifold block assembly | SY9000-50-2A-C8 | C8: A, B port with One-touch fitting for ø8 |
| | | SY9000-50-2A-C10 | C10: A, B port with One-touch fitting for ø10 |
| | | SY9000-50-2A-C12 | C12: A, B port with One-touch fitting for ø12 |
| | | SY9000-50-2A-N9 | N9: A, B port with One-touch fitting for ø $\frac{3}{16}$ " |
| | | SY9000-50-2A-N11 | N11: A, B port with One-touch fitting for ø $\frac{3}{8}$ " |
| | | SY9000-50-2A-O2* | O2: A, B port $\frac{1}{4}$ " (thread type) |
| | | SY9000-50-2A-O3* | O3: A, B port $\frac{3}{8}$ " (thread type) |
| 4 | Round head combination screw | SY9000-18-2 | M3 x 42, Matt nickel plated |
| 5 | Gasket | SY9000-11-2 | |
| 6 | Tension bolt | SY9000-23-□ | □ at the end of part number corresponds with the number of manifold station. Specify the same number as the number of stations. |
| 7 | Hexagon nut | SY9000-25-1 | |
| 8 | DIN rail | VZ1000-11-4-□ | Refer to page 532. |
| 9 | Wiring unit assembly | SY9000-36-□A | □ at the end of part number corresponds with the number of manifold station. Specify the same number as the number of stations (4 to 12 stations). |
| 10 | Connector assembly | SY9000-37-□□ | Refer to page 515. |
| 11 | Lead wire cover | SY9000-41-1 | |
| 12 | Clamp sub assembly | SY9000-30-1A | Included only with the DIN rail mounting type. |

⑪ How to assemble lead wire cover

Lead wire cover is only usable for double solenoid valves. Lead wire is inserted into the lead wire cover as magnifying figure, then push it until it touches the valve body.



⚠ Caution

For type 43P (Flat cable manifold) of the SY9000 series, the lead wire cover is attached for bundling the lead wires for each solenoid. In case such as adding double solenoid valve, etc., order separately lead wire cover as well.

② SUP/EXH block assembly no. (D side mounting)

• Direct mount type: **SY9000-70-□□A-□□**

• DIN rail mount type: **SY9000-72-□□A-□□**

• **P, R port**

| | |
|------------|---|
| C12 | One-touch fitting for ø12 |
| N11 | One-touch fitting for ø $\frac{3}{8}$ " |
| 00 | Plug |

• **Specifications**

| | |
|---|---|
| 1 | Internal pilot type |
| 3 | External pilot type |
| 4 | Internal pilot / Built-in silencer type |
| 5 | External pilot / Built-in silencer type |

③ SUP/EXH block assembly no. (U side mounting)

• Direct mount type: **SY9000-71-□□A-□□**

• DIN rail mount type: **SY9000-73-□□A-□□**

• **P, R port**

| | |
|------------|---|
| C12 | One-touch fitting for ø12 |
| N11 | One-touch fitting for ø $\frac{3}{8}$ " |
| 00 | Plug |

• **Specifications**

| | |
|---|---|
| 1 | Internal pilot type |
| 3 | External pilot type |
| 4 | Internal pilot / Built-in silencer type |
| 5 | External pilot / Built-in silencer type |

How to Increase Manifold Bases (SY9000 series only) Manifold case can be added at any location.

When a type 43 manifold base is added, tension bolts as well as manifold block assembly will be required. Order the tension bolt suitable for the stations after a station was increased (decreased), since the length of a tension bolt differs by the number of stations. (For changing the number of stations for a type 43P manifold, wiring unit for the stations and lead assembly will be required.)

- 1 Loosen the tension bolts connecting the manifold base, and pull out both of 2 tension bolts.
(When equipped with a DIN rail, loosen one DIN rail holding screw on either U side or D side.)
- 2 Separate the blocks at the location where station expansion is desired.
- 3 Mount additional manifold block assembly.
- 4 Press block-to-block so that there's no gap. After connection, insert a tension bolt for desired stations and then tighten it.

Caution (Tightening torque: 2.9 N·m)


(When equipped with a DIN rail, be sure to tighten the DIN rail holding screws after tightening the tension bolts. Tightening torque: 0.55 to 0.65 N·m)

Caution

1. Be sure to shut off the power and air supplies before disassembly. Furthermore, since air may remain inside the actuator, piping and manifold, confirm that the air is completely exhausted before performing any work.
2. When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate.
3. By adding wiring unit assembly to type 43 manifold, it can be changed to type 43P manifold, too.

How to Replace A, B Port Fitting Assembly

By replacing manifold block fitting assemblies or the threaded port block assembly of a type 43(P) manifold, the port size of the A and B ports can be changed. To replace these parts, remove the clip with a flat head screwdriver after the valve has been removed. Insert the fitting assemblies or threaded port block assembly, and then reinsert the clip so that it does not protrude from the manifold block.

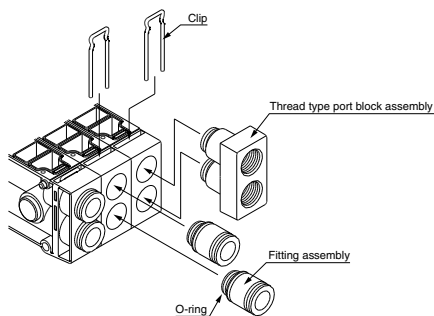

Fitting Assembly Part No.

| Port size | No. | Note |
|---------------------------------------|-----------------|--|
| One-touch fitting assembly for ø8 | VVQ4000-50B-C8 | |
| One-touch fitting assembly for ø10 | VVQ4000-50B-C10 | |
| One-touch fitting assembly for ø12 | VVQ4000-50B-C12 | |
| One-touch fitting for ø 3/16" | VVQ4000-50B-N9 | |
| One-touch fitting for ø 3/8" | VVQ4000-50B-N11 | |
| 1/4 threaded type port block assembly | SY9000-58A-02* | --* at the end of part number denotes the thread type. |
| 3/8 threaded type port block assembly | SY9000-58A-03* | --* at the end of part number denotes the thread type. |
| Plug assembly | SY9000-62-1A | |

Note 1) Be careful to avoid damage or contamination of O-rings, as this can cause air leakage.

Note 2) Although replacing One-touch fittings of P, R port is also possible, use caution to the cases, etc. in which solenoid valves are often used at the same time by using the smaller sized fittings than the standard size (ø12). Because there may not be able to supply or exhaust air sufficiently in comparison with the valve performances. Besides, although fittings used for A, B port are the same, it is not possible to use the threaded type port block assembly.

Note 3) The basic order unit of the One-touch fitting is 10 pcs.

5 Port Solenoid Valve Base Mounted Manifold

Note) AC-type models that are CE-compliant have DIN terminals only.



Stacking Type/DIN Rail Mounted/Individual Wiring

Type **45**

SY3000/5000 Series

How to Order Manifold

SS5Y **3** - 45 - **05** **U** - **C6** - [] - []

• **Series**

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

• **Valve stations**

| | |
|----|-------------|
| 02 | 2 stations |
| ⋮ | ⋮ |
| 20 | 20 stations |

• **SUP/EXH block assembly mounting position**

| Symbol | Mounting position | Applicable no. of stations |
|--------|------------------------|----------------------------|
| U | U side | 2 to 10 stations |
| D | D side | |
| B | (Both sides) | 2 to 20 stations |
| M* | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

• **Option**

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

• **CE-compliant**

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

• **A, B port size**

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | SY5000 |
| C4 | One-touch fitting for ø4 | |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |


| Symbol | Port size | Applicable series |
|--------|-------------------------------|-------------------|
| N3 | One-touch fitting for ø 5/32" | SY3000 |
| N7 | One-touch fitting for ø 1/4" | |
| M | Mixed | SY5000 |
| N3 | One-touch fitting for ø 5/32" | |
| N7 | One-touch fitting for ø 1/4" | |
| N9 | One-touch fitting for ø 5/16" | |
| M | Mixed | |

* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

* Refer to pages 616 to 620 for external pilot specifications and built-in silencer.

How to Order Manifold Assembly (Example)

Example

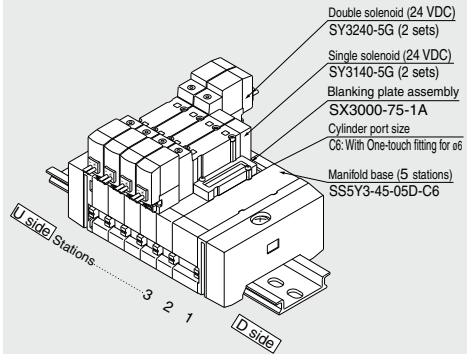

SS5Y3-45-05D-C6 1 set (Type 45, 5-station manifold base part no.)
 * **SX3000-75-1A** 1 set (Blanking plate assembly part no.)
 * **SY3140-5G** 2 sets (Single solenoid part no.)
 * **SY3240-5G** 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.



How to Order Valve

Note) AC-type models that are CE-compliant have DIN terminals only.

[Option]

SY 5 2 40 - **5 L** - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

AC (Hz)^{50/60}

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
 * For type W□, DC voltage is only available.
 * D and DO only available for SY5000.
 Note) AC-type models that are CE-compliant have DIN terminals only.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With indicator light and surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
 * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC | | | 24, 12 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 6, 5, 3 VDC |
|--|--|--|---|--|
| Grommet | L plug connector | M plug connector | DIN terminal | M8 connector |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | (SY5000) D: With connector | WO: Without connector cable |
| H: Lead wire length 600 mm | LN: Without lead wire | MN: Without lead wire | DO: Without connector | W□: With connector cable ^{Note 2)} |
| | LO: Without connector | MO: Without connector | Y: With connector | |
| | | | YO: Without connector | |
| Manifold mounting | SY3000 | ● | — ^{Note 1)} | ● |
| | SY5000 | ● | ● | ● |
| CE-compliant | DC | ● | ● | ● |
| | AC | — | ● | — |

Note 1) The DIN terminal of the SY3000 series cannot be mounted on a standard manifold. For details, refer to page 639.

Note 2) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

* LN, MN type: with 2 sockets.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).

Refer to page 638 for details.

* Refer to page 641 for connector cable of M8 connector.


* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.

SY
S0700
S0700



Manifold Specifications

| | | | | |
|--|---|--|---|--|
| Model | SS5Y3-45(-Q) | | SS5Y5-45(-Q) | |
| Applicable valve | SY3□40 | | SY5□40 | |
| Manifold type | Stacking type/DIN rail mounted | | | |
| P (SUP)/R (EXH) | Common SUP, Common EXH | | | |
| Valve stations | 2 to 20 stations ^{Note 1)} | | | |
| A, B port Porting specifications | Location | Base | | |
| | Direction | Side | | |
| Port size | P, R port | C8 (One-touch fitting for ø8) | C10 (One-touch fitting for ø10) | |
| | A, B port | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | |
| Manifold base weight W (g), n: Stations | 2 to 10 stations: W = 22n + 118 11 to 20 stations: W = 22n + 140 | | 2 to 10 stations: W = 47n + 156 11 to 20 stations: W = 47n + 190 | |

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.


Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|-----------------|------------------------|----------------|-----------------------------|------|------|-----------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s(bar)) | b | Cv | C (dm ³ /s(bar)) | b | Cv |
| SS5Y3-45 | C8 | C6 | 0.88 | 0.21 | 0.22 | 0.95 | 0.18 | 0.22 |
| SS5Y5-45 | C10 | C8 | 2.2 | 0.24 | 0.53 | 2.5 | 0.18 | 0.58 |

Note) The value is for manifold base with 5 stations and individually operated 2 position type.

Manifold Option

- Individual SUP spacer assembly ■ Individual EXH spacer assembly ■ SUP blocking disk ■ EXH blocking disk

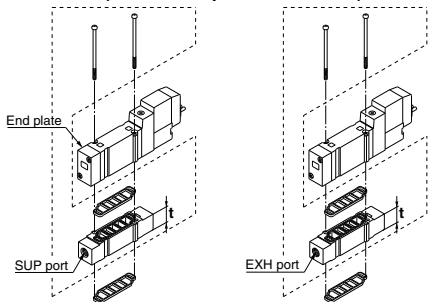


| Series | Assembly part no. | Port size | t |
|---------------|--------------------|-----------|----|
| SY3000 | SY3000-38-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-38-16-A(-Q) | 1/8" | 15 |

Note) The SUP port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

| Series | Assembly part no. | Port size | t |
|---------------|--------------------|-----------|----|
| SY3000 | SY3000-39-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-39-16-A(-Q) | 1/8" | 15 |

Note) The EXH port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

■ Blanking plate assembly




| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SX3000-75-1A(-Q) |
| SY5000 | SX5000-76-5A(-Q) |

■ Dimensions/DIN rail

VZ1000-11-1-□

● Refer to L dimensions

* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.



| | | | | | | | | | | | |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| L Dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 |
| No. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| L Dimension | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 |
| No. | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| L Dimension | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 | 473 | 485.5 | 498 |
| No. | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 |
| L Dimension | 510.5 | 523 | 535.5 | 548 | 560.5 | 573 | 585.5 | 598 | 610.5 | 623 | 635.5 |
| No. | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 |
| L Dimension | 648 | 660.5 | 673 | 685.5 | 698 | 710.5 | 723 | 735.5 | 748 | 760.5 | 773 |
| No. | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 |
| L Dimension | 785.5 | 798 | 810.5 | 823 | 835.5 | 848 | 860.5 | 873 | 885.5 | 898 | 910.5 |
| No. | 66 | 67 | 68 | 69 | 70 | 71 | | | | | |
| L Dimension | 923 | 935.5 | 948 | 960.5 | 973 | 985.5 | | | | | |

* Refer to L1 dimension on pages starting with pages 542 to 545 for lengths that correspond to the number of manifold stations.

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



| Series | Part no. |
|---------------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)





| Series | Part no. |
|---------------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A


Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



| Series | Model | Effective area mm ² | A | B | C |
|-------------------------|----------|--------------------------------|-------|------|------|
| For SY3000 (ø8) | AN15-C08 | 20 | ø13 | 20 | 45 |
| For SY5000 (ø10) | AN20-C10 | 30 | ø16.5 | 30.5 | 57.5 |

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size øD | Model | A | L | D |
|-----------------------------|----------------|------|------|-----|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 1/8" | KQ2P-01 | 16 | 31.5 | 5 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |

Manifold Option

• How to Order Interface Regulator (SY3000, 5000 only)

SY3000 series

ARBY3000 - **05** - **P** - 2

• **Regulating port**

| | |
|-----------|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

• **Pressure gauge connection port**

| | |
|-----------|--|
| 05 | Pressure gauge (G15-10-01) [for odd number station] |
| 06 | Pressure gauge (G15-10-01) [for even number station] |
| M1 | Plug (M-5P) |

* In the case of the ARBY3000 series with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering with each others.

SY5000 series

ARBY5000 - **00** - **P** - 2


• **Regulating port**

| | |
|-----------|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |


• **Pressure gauge connection port**

| | |
|-----------|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |


ARBY3000-05-□-2
(For mounting odd number stations)




ARBY3000-06-□-2
(For mounting even number stations)




ARBY3000-M1-□-2



ARBY5000-00-□-2



ARBY5000-M1-□-2



Note) ARBY is not CE-compliant.

Accessory

| Series | Round head combination screw Reference screw size | Gasket |
|----------|--|-------------|
| ARBY3000 | SY3000-23-10 (M2 x 36) | SX3000-57-4 |
| ARBY5000 | AC00283 (M3 x 48.5) | SX5000-57-6 |

⚠ Caution

Mounting screw
tightening torques

M2: 0.16 N·m



M3: 0.8 N·m

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |


Dimensions: SY3000 Series

[] : AC



**SS5Y3-45- Stations D- C4, N3
C6, N7**

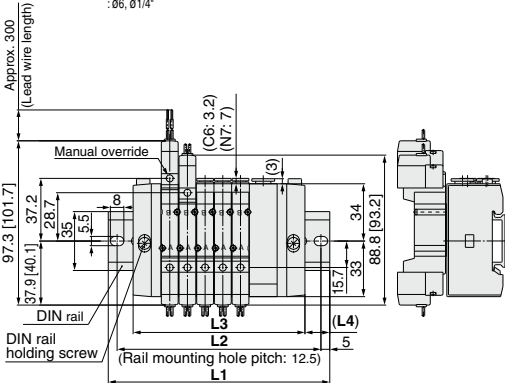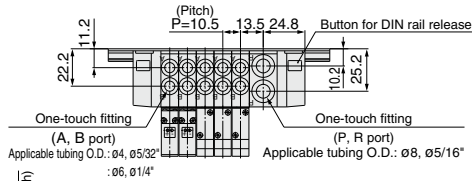

(Station n)- (Station 1)

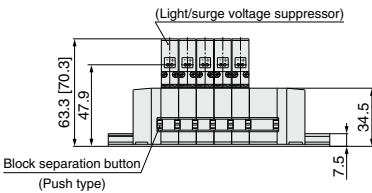


**SS5Y3-45- Stations U- C4, N3
C6, N7**

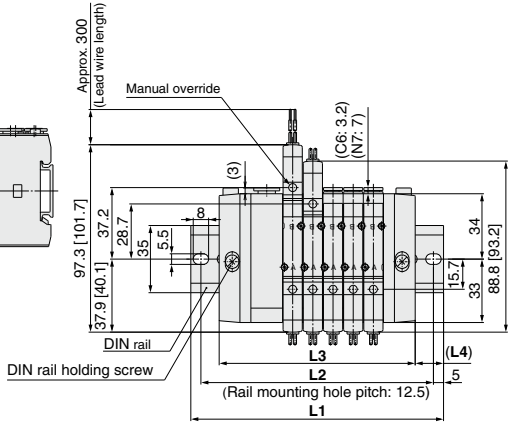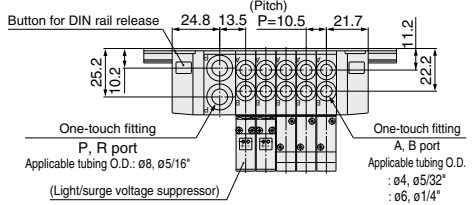

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 98 | 110.5 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 |
| L2 | 87.5 | 100 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 |
| L3 | 70.5 | 81 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 |
| L4 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 |


With interface regulator (with gauge)

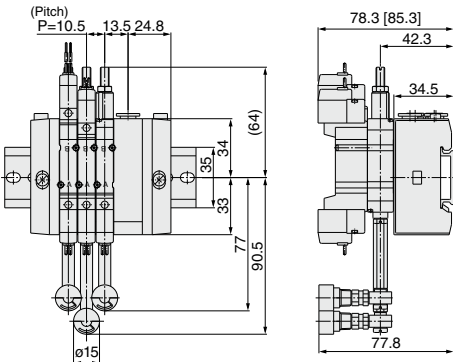


Dimensions: SY3000 Series

[] : AC


**SS5Y3-45- Stations B- C4, N3
C6, N7**

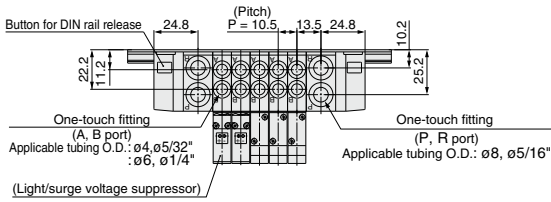


L plug connector




M plug connector



M8 connector (WO)



Note) Refer to page 642 for dimensions of connector types.

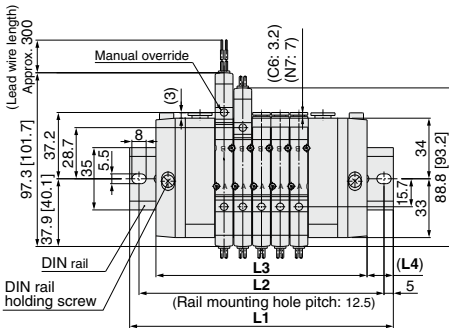

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 |
| L2 | 100 | 112.5 | 125 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 |
| L3 | 87 | 97.5 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 |
| L4 | 11.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 |


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 210.5 | 223 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 |
| L2 | 200 | 212.5 | 225 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 |
| L3 | 181.5 | 192 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 |
| L4 | 14.5 | 15.5 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 |

Dimensions: SY5000 Series

[]: AC




SS5Y5-45- Stations D-

C4, N3
C6, N7
C8, N9

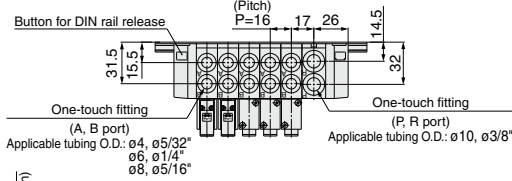


SS5Y5-45- Stations U-

C4, N3
C6, N7
C8, N9

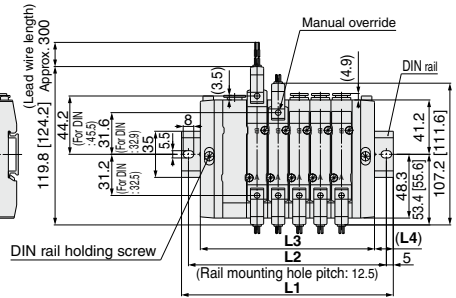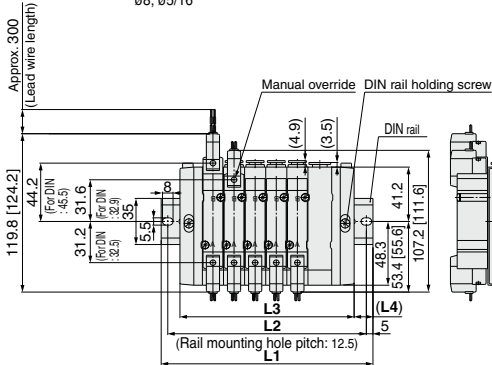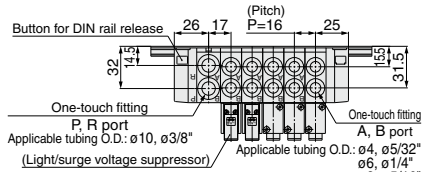


(Station n) --- (Station 1)

(Light/surge voltage suppressor)

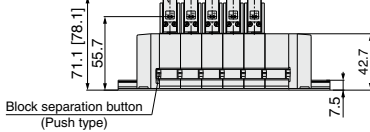

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 110.5 | 135.5 | 148 | 160.5 | 173 | 198 | 210.5 | 223 | 235.5 |
| L2 | 100 | 125 | 137.5 | 150 | 162.5 | 187.5 | 200 | 212.5 | 225 |
| L3 | 84 | 100 | 116 | 132 | 148 | 164 | 180 | 196 | 212 |
| L4 | 13 | 17.5 | 16 | 14 | 12.5 | 17 | 15 | 13.5 | 11.5 |


With interface regulator (with gauge)

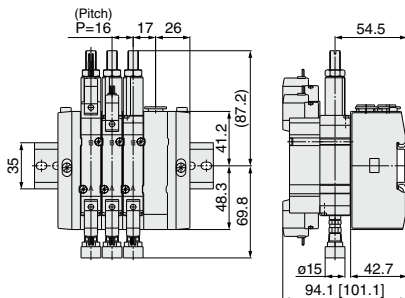


Dimensions: SY5000 Series

[] : AC


SS5Y3-45- Stations B-C4, N3
C6, N7
C8, N9

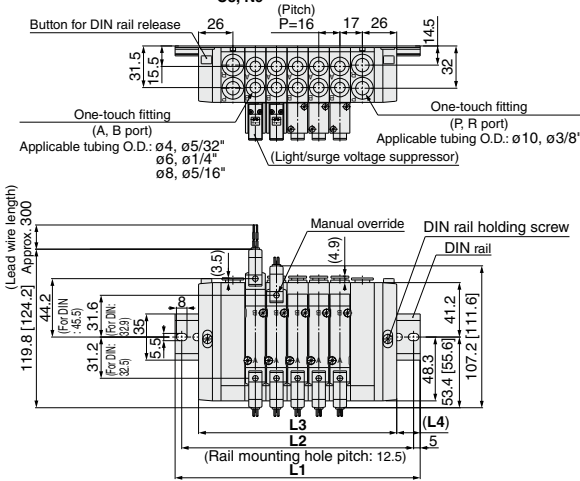

L plug connector




M plug connector



| Stations | n1 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations | |
|----------|-------------|-------|-------|-------|-------|-------|-------|-------|-------------|-------|
| L1 | | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 | 223 | 248 | 260.5 |
| L2 | | 125 | 137.5 | 150 | 175 | 187.5 | 200 | 212.5 | 237.5 | 250 |
| L3 | | 102 | 118 | 134 | 150 | 166 | 182 | 198 | 214 | 230 |
| L4 | | 16.5 | 15 | 13 | 17.5 | 16 | 14 | 12.5 | 17 | 15 |


| Stations | n1 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations | |
|----------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|-------|
| L1 | | 273 | 285.5 | 310.5 | 323 | 335.5 | 360.5 | 373 | 385.5 | 398 | 423 |
| L2 | | 262.5 | 275 | 300 | 312.5 | 325 | 350 | 362.5 | 375 | 387.5 | 412.5 |
| L3 | | 246 | 262 | 278 | 294 | 310 | 326 | 342 | 358 | 374 | 390 |
| L4 | | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 | 12 | 16.5 |

M8 connector (WO)



Note) Refer to page 642 for dimensions of connector types.


DIN terminal (D, Y)



| |
|-------|
| SY |
| SY |
| S0700 |
| S0700 |

DIN Rail Manifold Exploded View

Type 45

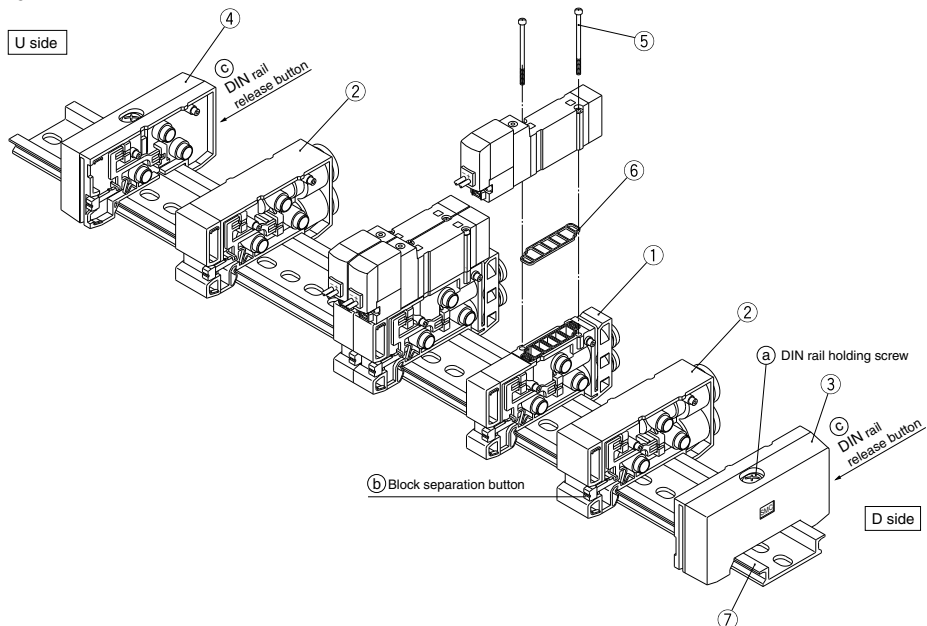

Replacement Parts

| No. | Description | Part no. | | Note |
|-----|--|---|---|--|
| | | SY3000 | SY5000 | |
| 1 | Manifold block assembly | SX3000-50-1A-□□(-Q) | SX5000-50-1A-□□(-Q) | □□: SY3000 (Metric size) C4: With One-touch fitting for ø4 (Inch size) N3: With One-touch fitting for ø5/32" SY5000 (Metric size) C4: With One-touch fitting for ø4 (Inch size) N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" C8: With One-touch fitting for ø8 N9: With One-touch fitting for ø5/16" (Gasket 6 is supplied as an accessory.) |
| 2 | SUP/EXH block assembly | (Metric size) SX3000-51-1A (Inch size) SX3000-51-15A | (Metric size) SX3000-51-1A (Inch size) SX5000-51-15A | P, R port SY3000 (Metric size) With One-touch fitting for ø8 (Inch size) With One-touch fitting for ø9/16" P, R port SY5000 (Metric size) With One-touch fitting for ø10 (Inch size) With One-touch fitting for ø3/8" |
| 3 | End block assembly R | SX3000-52-1A(-Q) | SX5000-52-1A(-Q) | For D side |
| 4 | End block assembly L | SX3000-53-1A(-Q) | SX5000-53-1A(-Q) | For U side |
| 5 | Round head combination screw Reference screw size | SY3000-23-4 (M2 x 21) | AC00077 (M3 x 26) | |
| 6 | Gasket | SX3000-57-4 | SX5000-57-6 | |
| 7 | DIN rail | VZ1000-11-1-□ | | Refer to page 539. |

DIN Rail Manifold Exploded View

How to Increase Manifold Bases Station expansion is possible at any position.


- 1 Loosen DIN rail holding screw ③ fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons ②, at two locations, separate the manifold base from the DIN rail.)
- 2 Press manifold block assembly dividing button ①, that are at the location where manifold bases are to be added, until button ② locks, and then separate the block assemblies.
- 3 Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- 4 Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw ③ to fix them to the DIN rail.
⚠Caution (Tightening torque: 1.4 N·m)
 (While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)

⚠Caution


Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.

Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.

Fig. (1) Block mounting procedure

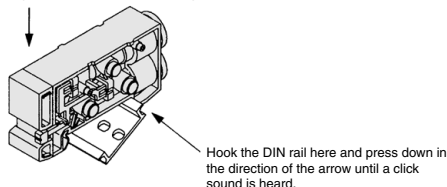

How to Change Fitting Assembly



Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly. After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

Fitting Assembly Part No.

Metric size

| | | |
|--------|--------------------------------|----------------|
| SY3000 | One-touch fitting for $\phi 4$ | VVQ1000-50A-C4 |
| | One-touch fitting for $\phi 6$ | VVQ1000-50A-C6 |
| SY5000 | One-touch fitting for $\phi 4$ | VVQ1000-51A-C4 |
| | One-touch fitting for $\phi 6$ | VVQ1000-51A-C6 |
| | One-touch fitting for $\phi 8$ | VVQ1000-51A-C8 |

Inch size

| | | |
|--------|-------------------------------------|----------------|
| SY3000 | One-touch fitting for $\phi 5/32$ " | VVQ1000-50A-N3 |
| | One-touch fitting for $\phi 1/4$ " | VVQ1000-50A-N7 |
| SY5000 | One-touch fitting for $\phi 5/32$ " | VVQ1000-51A-N3 |
| | One-touch fitting for $\phi 1/4$ " | VVQ1000-51A-N7 |
| | One-touch fitting for $\phi 5/16$ " | VVQ1000-51A-N9 |

Note 1) P and R ports cannot be changed.

Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.

Note 3) Purchasing order is available in units of 10 pieces.

SJ

SY

SY

S0700

S0700

5 Port Solenoid Valve Base Mounted Manifold Stacking Type/DIN Rail Mounted/Connector Box



Type **45-A**
NA

SY3000/5000 Series

How to Order Manifold

SS5Y **3** -45- **A** **U** -05 **D** -C6 - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Specifications

| Symbol | Specifications |
|--------|---------------------------------|
| A | With connector box (+COM spec.) |
| NA | With connector box (-COM spec.) |

* The type of attached lead wire assembly is different.

Connector box mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|--------------------------------------|
| 02 | 2 stations | Applicable up to 16 solenoid valves. |
| ⋮ | ⋮ | |
| 16 | 16 stations | |

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Applicable stations |
|--------|------------------------|---------------------|
| U | U side | 2 to 10 stations |
| D | D side | |
| B | Both sides | 2 to 16 stations |
| M* | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)

A/B port size

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | SY5000 |
| C4 | One-touch fitting for ø4 | |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|--|-------------------|
| N3 | One-touch fitting for ø ³ / ₃₂ " | SY3000 |
| N7 | One-touch fitting for ø ⁷ / ₁₆ " | |
| M | Mixed | SY5000 |
| N3 | One-touch fitting for ø ³ / ₃₂ " | |
| N7 | One-touch fitting for ø ⁷ / ₁₆ " | |
| N9 | One-touch fitting for ø ⁹ / ₁₆ " | |
| M | Mixed | |

* In the case of mixed specifications, indicate separately on the manifold specification sheet.


CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

* Refer to pages 616 to 620 for external pilot specifications and built-in silencer.

How to Order Manifold Assembly (Example)

Example (SY3000, +COM, U side)

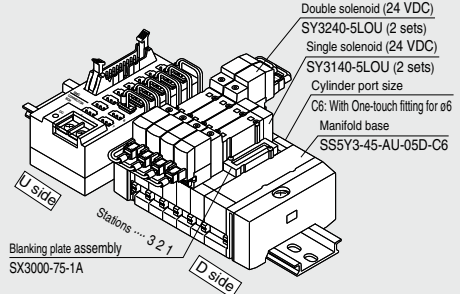

SS5Y3-45-AU-05D-C6 ... 1 set (Type 45, 5-station manifold base part no.)
 * SX3000-75-1A 1 set (Blanking plate assembly part no.)
 * SY3140-5LOU 2 sets (Single solenoid part no.)
 * SY3240-5LOU 2 sets (Double solenoid part no.)
 The asterisk denotes the symbol for assembly.
 Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of connector box. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.
 SS5Y3-45-AU-05D-C6 is assembled with solenoid valve and lead wire assembly when shipping. When ordering manifold only (without valves/wires/options), refer to how to order on page 536 and list the connector box (VZ3000-106-1A) and the rail stopper (TXE1-SMC) below the manifold to allow for the connector box mounting at U side. (Be sure to order DIN rail 3 station longer than number of the manifold stations.) In this case, please note that dimensions, L1 and L2 on pages 552 and 553 may vary slightly.) For other components, refer to page 554.

How to Order Valve

SY **5** **2** 40-5 LOU - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
|---|--------|

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Manual override

| | |
|-----|--------------------------------|
| NII | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |


Made to Order

| | |
|-----|---|
| NII | — |
| X90 | Main valve fluoro rubber (Refer to page 624.) |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.



Manifold Specifications

| | | | | |
|--|---|--|---|--|
| Model | SS5Y3-45^A-NA (Q) | | SS5Y5-45^A-NA (Q) | |
| Applicable valve | SY3□40 | | SY5□40 | |
| Manifold type | Stacking type/DIN rail mounted | | | |
| P (SUP)/R (EXH) | Common SUP, Common EXH | | | |
| Valve stations | 2 to 16 stations ^{Note 1, 2)} | | | |
| A, B port | Base | | | |
| | Side | | | |
| Porting specifications | Location | | Side | |
| | Direction | | Side | |
| Port size | P, R port | C8 (One-touch fitting for ø8) | C10 (One-touch fitting for ø10) | |
| | A, B port | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) | C4 (One-touch fitting for ø4) C6 (One-touch fitting for ø6) C8 (One-touch fitting for ø8) | |
| Manifold base weight W (g) | 2 to 10 stations: W = 26n + 207 | | 2 to 10 stations: W = 52n + 245 | |
| n: Stations | 11 to 20 stations: W = 26n + 229 | | 11 to 16 stations: W = 52n + 279 | |
| Applicable flat ribbon cable connector | Flat ribbon cable connector Socket: 20 pins MIL type with strain relief conforming to MIL-C-83503 | | | |
| Wiring specifications | +COM specifications (Type 45-A), -COM specifications (Type 45-NA) | | | |

SJ
SY
SY
S0700
S0700


Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.
Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|------------|------------------------|----------------|-----------------------------|------|------|-----------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s(bar)) | b | Cv | C (dm ³ /s(bar)) | b | Cv |
| SS5Y3-45-□ | C8 | C6 | 0.88 | 0.21 | 0.22 | 0.95 | 0.18 | 0.22 |
| SS5Y5-45-□ | C10 | C8 | 2.2 | 0.24 | 0.53 | 2.5 | 0.18 | 0.58 |


Note) The value is for manifold base with 5 stations and individually operated 2 position type.

Manifold Wiring Diagram (Circuit diagram for the reference layout)

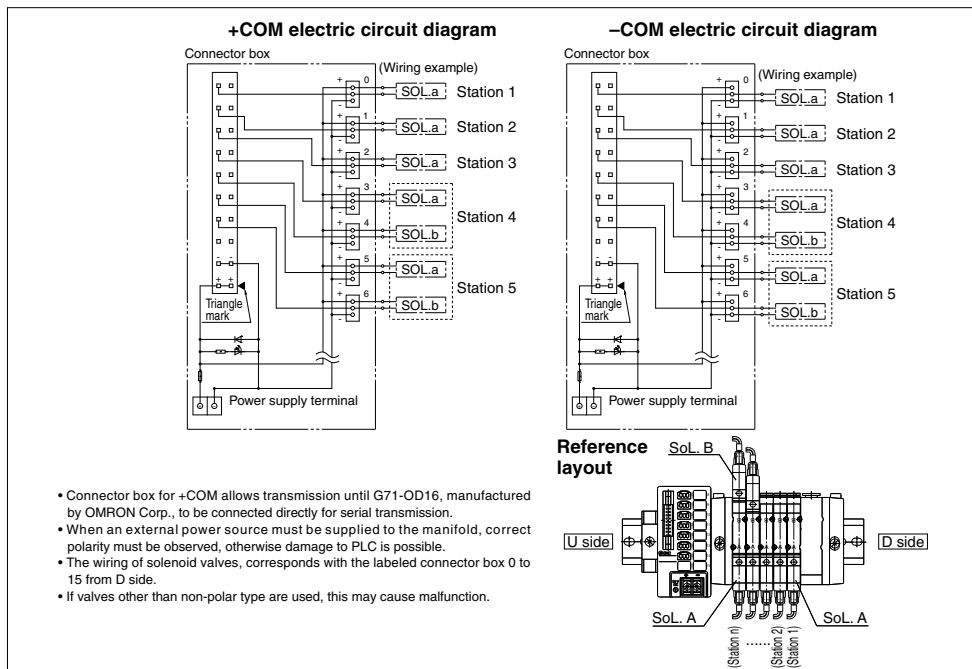

Manifold Option

- Individual SUP spacer assembly
- Individual EXH spacer assembly

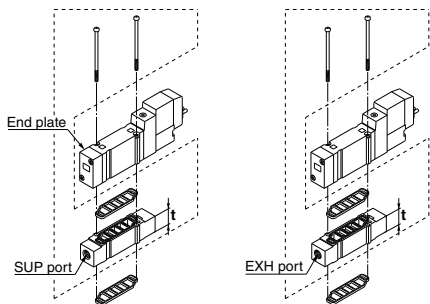

| Series | Assembly part no. | Port size | t |
|--------|-------------------|-----------|----|
| SY3000 | SY3000-38-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-38-16A(-Q) | 1/8" | 15 |


Note) The SUP port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

| Series | Assembly part no. | Port size | t |
|--------|-------------------|-----------|----|
| SY3000 | SY3000-39-2A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-39-16A(-Q) | 1/8" | 15 |

Note) The EXH port may be either on the lead wire side or on the end plate side. However, as the CE-compliant products (-Q) must be mounted in the specified direction, the port directions cannot be changed. (An assembly is shipped under the condition shown in the figure.)

Cable assembly

AXT100-FC20-¹/₃

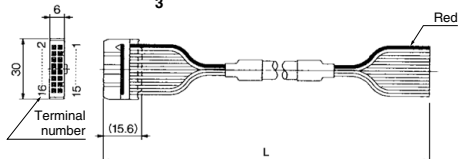

Connector Assembly for Flat Ribbon Cables

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|------------------------|
| 1.5 m | AXT100-FC20-1 | Cable 20 core x 22 AWG |
| 3 m | AXT100-FC20-2 | |
| 5 m | AXT100-FC20-3 | |

* For other commercial connectors, use a 20 pins with strain relief conforming to MIL-C-83503.

Connector manufacturers' example

- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.

SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



| Series | Part no. |
|--------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)



| Series | Part no. |
|--------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

Label for block disk


The labels shown below are used on manifold stations containing SUP/EXH blocking disk(s) to show their location. (3 pcs. each)

VZ3000-123-1A

Label for SUP block disk

Label for EXH block disk


Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



| Series | Model | Effective area mm ² | A | B | C |
|------------------|----------|--------------------------------|-------|------|------|
| For SY3000 (ø8) | AN15-C08 | 20 | ø13 | 20 | 45 |
| For SY5000 (ø10) | AN20-C10 | 30 | ø16.5 | 30.5 | 57.5 |

Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ød | Model | A | L | D |
|-----------------------------|---------|------|------|-----|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 1/8" | KQ2P-01 | 16 | 31.5 | 5 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |

Warning

When mounting a valve or spacer on the manifold base or sub-plate, etc., those mounting directions are determined. If mounted in the wrong direction, the equipment to be connected may cause malfunction. Refer to external dimensions, and then mount it.

Manifold Option

• How to Order Interface regulator (SY3000, 5000 only)

SY3000 series

ARBY3000 - 05 - P - 2

• **Regulating port**

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

• **Pressure gauge connection port**

| | |
|----|--|
| 05 | Pressure gauge (G15-10-01) [for odd number station] |
| 06 | Pressure gauge (G15-10-01) [for even number station] |
| M1 | Plug (M-5P) |

* In the case of the ARBY3000 series with a pressure gauge when mounting on the manifold, use caution that the part numbers are different between the odd no. stations and the even no. stations to avoid gauges from interfering from each others.

SY5000 series

ARBY5000 - 00 - P - 2

• **Regulating port**

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled type, A port regulation) |
| B1 | B port (P controlled type, B port regulation) |

• **Pressure gauge connection port**

| | |
|----|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |

SJ
SY
SY
S0700
S0700


ARBY3000-05-□-2
(For odd number stations)

ARBY3000-06-□-2
(For even number stations)

ARBY3000-M1-□-2

ARBY5000-00-□-2

ARBY5000-M1-□-2

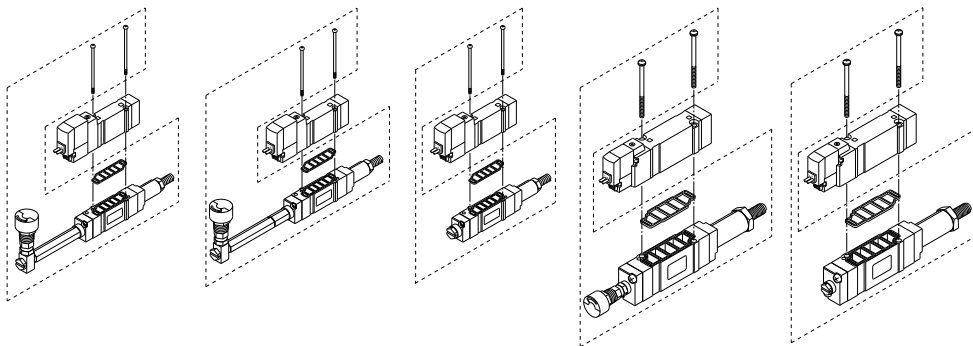

Note) ARBY is not CE-compliant.

Accessory

| Series | Round head combination screw Reference screw size | Gasket |
|-----------------|--|-------------|
| ARBY3000 | SY3000-23-10 (M2 x 36) | SX3000-57-4 |
| ARBY5000 | AC00283 (M3 x 48.5) | SX5000-57-6 |


⚠ Caution

Mounting screw tightening torques


M2: 0.16 N·m
M3: 0.8 N·m

Dimensions: SY3000 Series

SS5Y3-45-AU- Stations D- C4, N3 C6, N7

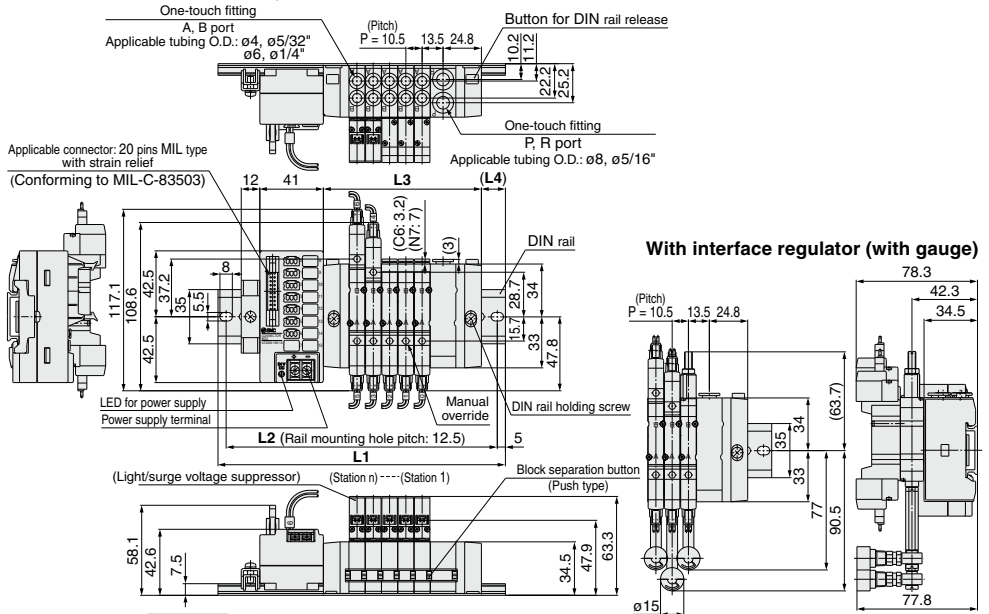


SS5Y3-45-AD- Stations U- C4, N3 C6, N7

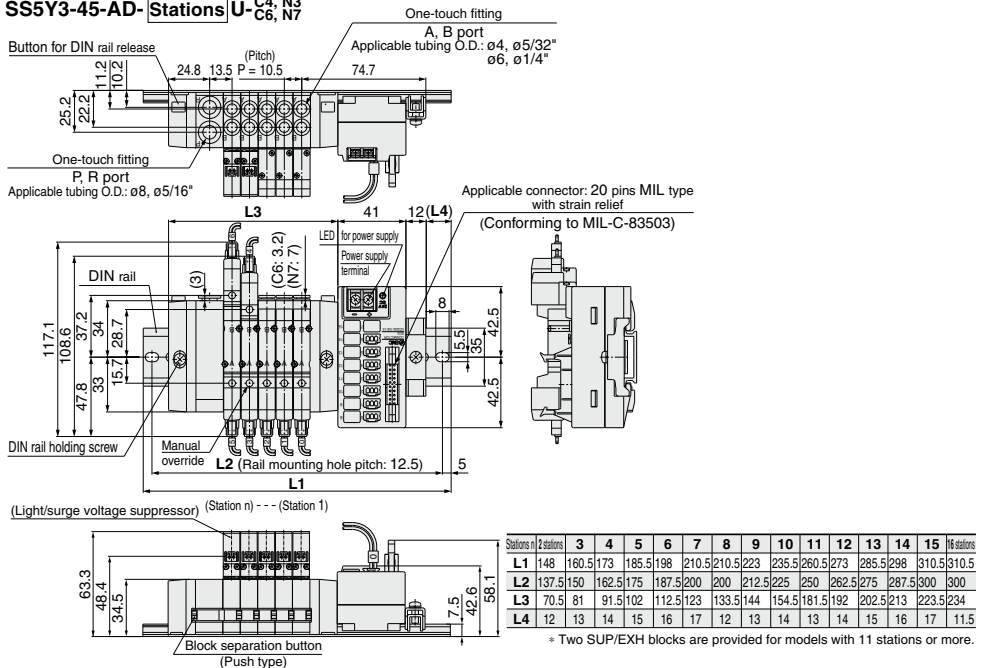


Dimensions: SY5000 Series


SS5Y5-45-AU-Stations D- C4, N3
C6, N7
C8, N9




Applicable connector: 20 pins MIL type
With strain relief
(Conforming to MIL-C-83503)

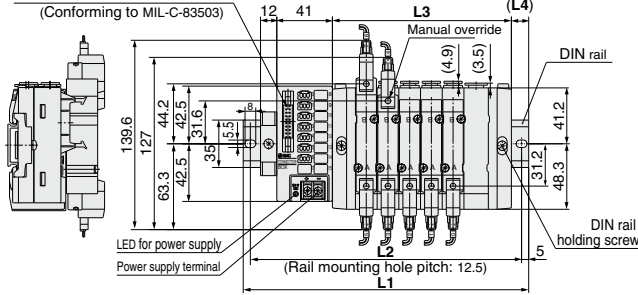



With interface regulator (with gauge)




(Light/surge voltage suppressor) (Station n) - - - - (Station 1)

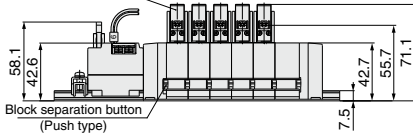

SS5Y5-45-AD-Stations U- C4, N3
C6, N7
C8, N9

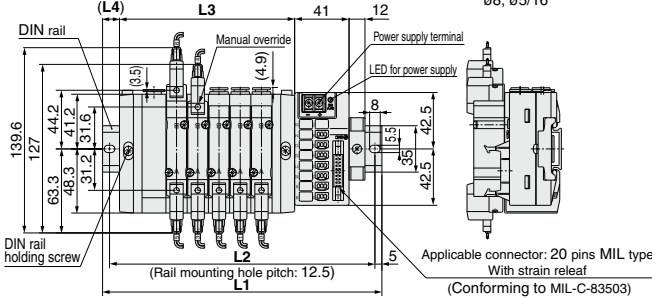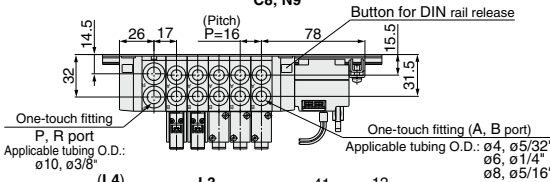

(Light/surge voltage suppressor) (Station n) - - - - (Station 1)

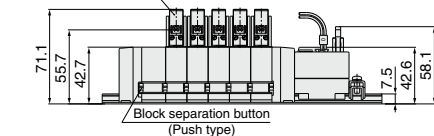


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 273 | 298 | 323 | 348 | 360.5 | 373 | 398 | 410.5 |
| L2 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 262.5 | 287.5 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 |
| L3 | 84 | 100 | 116 | 132 | 148 | 164 | 180 | 196 | 212 | 246 | 262 | 278 | 294 | 310 | 326 |
| L4 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 | 12 | 16.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 |

* Two SUP/EXH blocks are provided for models with 11 stations or more.

DIN Rail Manifold Exploded View

Type 45^A-NA

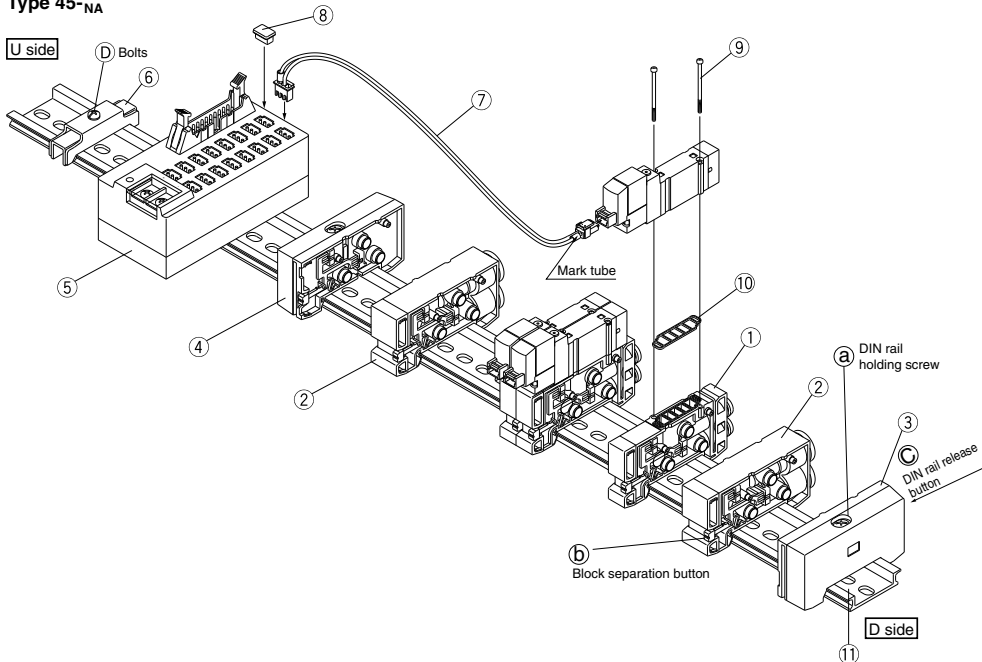


Replacement Parts

| No. | Description | Part no. | | Note |
|-----|------------------------------|---|---|---|
| | | SY3000 | SY5000 | |
| 1 | Manifold block assembly | SX3000-50-1A-□□(-Q) | SX5000-50-1A-□□(-Q) | *SY3000 (Metric size) C4: With One-touch fitting for ø4 N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" *SY5000 (Metric size) C4: With One-touch fitting for ø4 N3: With One-touch fitting for ø5/32" C6: With One-touch fitting for ø6 N7: With One-touch fitting for ø1/4" C8: With One-touch fitting for ø8 N9: With One-touch fitting for ø5/16" (Gasket 10 is supplied as an accessory.) |
| 2 | SUP/EXH block assembly | (Metric size) SX3000-51-1A (Inch size) SX3000-51-15A | (Metric size) SX5000-51-1A (Inch size) SX5000-51-15A | P, R port SY3000 (Metric size) With One-touch fitting for ø8 (Inch size) With One-touch fitting for ø5/16" P, R port SY5000 (Metric size) With One-touch fitting for ø10 (Inch size) With One-touch fitting for ø3/8" |
| 3 | End block assembly R | SX3000-52-1A(-Q) | SX5000-52-1A(-Q) | For D side |
| 4 | End block assembly L | SX3000-53-1A(-Q) | SX5000-53-1A(-Q) | For U side |
| 5 | Connector box | VZ3000-106-1A | | For 24 VDC only |
| 6 | Rail stopper | TXE1-SMC | | Made by Kasuga Electric Works |
| 7 | Connector assembly | SY3000-43-1A-□ | SY3000-43-2A-□ | +COM Type D, 2 to 8 stations Type U, 9 to 16 stations |
| | | SY3000-43-2A-□ | SY3000-43-3A-□ | +COM Type D, 9 to 16 stations Type U, 2 to 8 stations |
| | | SY3000-43-1NA-□ | SY3000-43-2NA-□ | -COM Type D, 2 to 8 stations Type U, 9 to 16 stations |
| | | SY3000-43-2NA-□ | SY3000-43-3NA-□ | -COM Type D, 9 to 16 stations Type U, 2 to 8 stations |
| 8 | Dust cap | VZ3000-63-2 | | |
| 9 | Round head combination screw | SY3000-23-4 | AC00077 | |
| | Reference screw size | (M2 x 21) | (M3 x 26) | |
| 10 | Gasket | SX3000-57-4 | SX5000-57-6 | |
| 11 | DIN rail | VZ1000-11-1-□ | | Refer to page 539. |

How to Increase Manifold Bases Station expansion is possible at any position.

- 1 Loosen DIN rail holding screw (A) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons (C), at two locations, separate the manifold base from the DIN rail.)
- 2 Press manifold block assembly dividing button (B), that are at the location where manifold bases are to be added, until button (D) locks, and then separate the block assemblies.
- 3 Mount additional manifold block assembly on the DIN rail as shown in the figure 1.
- 4 Press the block assemblies until a click sound is produced, and tighten the DIN rail holding screw (A) to fix them to the DIN rail.
⚠Caution (Tightening torque: 1.4 N·m)
 (While lightly holding the blocks after fixing an end block on one side, tighten the other end block for for better sealing.)
- 5 Untighten the rail stopper bolt (E) to demount the connector box from the DIN rail, and when remounting it, tighten the bolt while pressing it against the rail.

Fig. (1) Block mounting procedure



⚠Caution

- Note 1) When there are 10 or fewer manifold block assemblies, and more are added to make a total of 11 or more, a supply/exhaust block assembly must also be added.
- Note 2) When disassembly and assembly are performed, air leakage may result if connections between blocks and tightening of the end block's holding screw, is inadequate. Before supplying air, confirm that there are no gaps, etc. between blocks, and that manifold blocks are securely fastened to the DIN rail. Then supply air and confirm that there is no air leakage before operating.
- Note 3) One connector assembly is necessary for one solenoid.
 When a number is necessary for the connector assembly mark tube, suffix the number to the part no. (0 to 15 are provided as mark tube numbers.)
 Ex) +COM spec.: D type for 2 to 8 stations: No. 10
SY3000-43-1A-10

How to Change Fitting Assembly

Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly.
 After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

Fitting Assembly Part No.


Metric size

| | | |
|---------------|--------------------------|----------------|
| SY3000 | One-touch fitting for ø4 | VVQ1000-50A-C4 |
| | One-touch fitting for ø6 | VVQ1000-50A-C6 |
| SY5000 | One-touch fitting for ø4 | VVQ1000-51A-C4 |
| | One-touch fitting for ø6 | VVQ1000-51A-C6 |
| | One-touch fitting for ø8 | VVQ1000-51A-C8 |

Inch size

| | | |
|---------------|------------------------------|----------------|
| SY3000 | One-touch fitting for ø5/32" | VVQ1000-50A-N3 |
| | One-touch fitting for ø1/4" | VVQ1000-50A-N7 |
| SY5000 | One-touch fitting for ø5/32" | VVQ1000-51A-N3 |
| | One-touch fitting for ø1/4" | VVQ1000-51A-N7 |
| | One-touch fitting for ø5/16" | VVQ1000-51A-N9 |

- Note 1) P and R ports cannot be changed.
 Note 2) Use caution that O-rings must be free from scratches and dust.
 Otherwise, air leakage may result.
 Note 3) Purchasing order is available in units of 10 pieces.

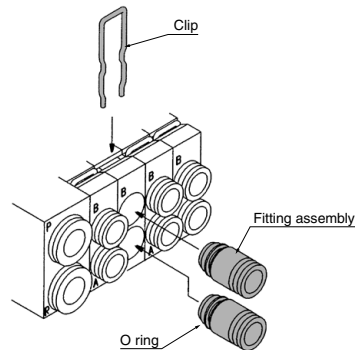

SJ
 SY
 SY
 S0700
 S0700

EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type [Option]

SY3000/5000 Series



Type **45S6A**

How to Order Manifold

SS5Y 3 - 45S6A [] U - 02 U [] - C4 - [] - []

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

SI unit

| | |
|-----|--------------------|
| Nil | NPN output (+COM.) |
| N | PNP output (-COM.) |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

SI unit mounting position

| | |
|---|--------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---|
| 02 | 2 stations | Double wiring ^{Note 1)} |
| : | : | |
| 08 | 8 stations | Specified layout ^{Note 2)} (Compatible with 16 solenoid valves) |
| 02 | 2 stations | |
| : | : | |
| 16 | 16 stations | |

• The number of the blanking plate assembly is also included.
 Note 1) Double wiring: Use of a single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
 Note 2) Specified layout: Indicate wiring specifications on the manifold specification sheet. (Note that double and 3 position valves cannot be used where single solenoid wiring has been specified.)

Option

When a DIN rail that is longer than the specified stations is desired, specify the required station number. (Max. 20 stations)

A, B port size

One-touch fitting (Metric size)

| Symbol | One-touch fitting | |
|--------|--------------------------|--------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | One-touch fitting | |
|--------|------------------------------|--------|
| N3 | One-touch fitting for ø5/32" | SY3000 |
| N7 | One-touch fitting for ø1/4" | |
| M | Mixed | |
| N3 | One-touch fitting for ø5/32" | SY5000 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |
| M | Mixed | |

• For the mixed specification, indicate separately on a manifold specification sheet.

Pilot specifications

| | |
|-----|----------------------------------|
| Nil | Internal pilot |
| S | Internal pilot/built-in silencer |
| R | External pilot |
| RS | External pilot/built-in silencer |


SUP/EXH block assembly mounting position

| | | |
|---|-------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | |
| B | Both sides | 2 to 16 stations |
| M | Special specifications* | |

*For the special specifications, indicate separately on a manifold specification sheet.

How to Order Manifold Assembly (Order Example)

Example

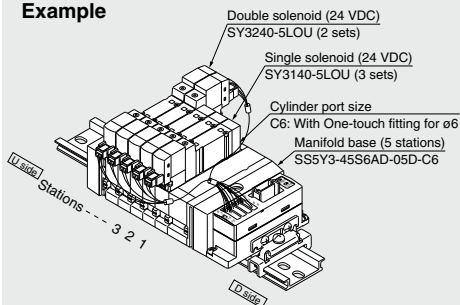

SS5Y3-45S6AD-05D-C6 ... 1 set (45S6A type 5-station manifold part no.)
 • SY3140-5LOU 3 sets (Single solenoid part no.)
 • SY3240-5LOU 2 sets (Double solenoid part no.)

—The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.


Add the valve and option part number under the manifold base part number. When entry of part numbers becomes complicated, indicate by the manifold specification sheet. For a manifold for an EX510, the length of the lead wire for a connector assembly depends on the number of stations. Therefore, the manifold assembly is shipped with the valves (including blanking plates) and connector assembly mounted on it, as the standard specification. Be sure to specify the part nos. of the solenoid valves to be mounted.

SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|--------|------------------------|------------------|-------|
| Nil | NPN output (+COM.) | EX510-S001 | P.897 |
| N | PNP output (-COM.) | EX510-S101 | |

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>

How to Order Valves




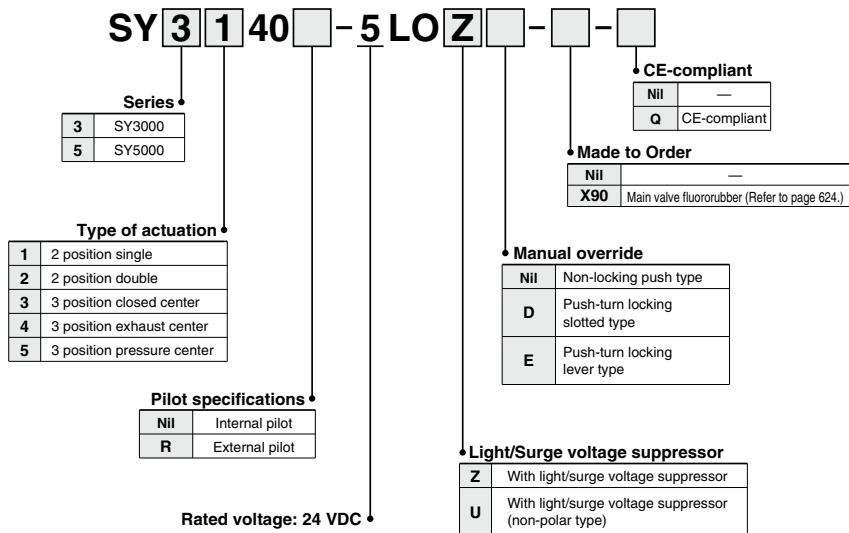


| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.


Dimensions

SY3000: SS5Y3-45S6A □ D- Stations U-C4, N3
C6, N7

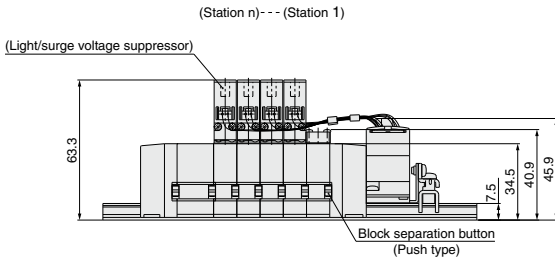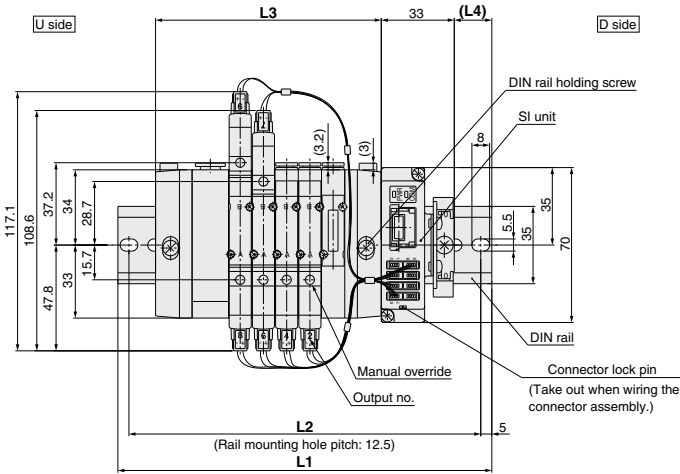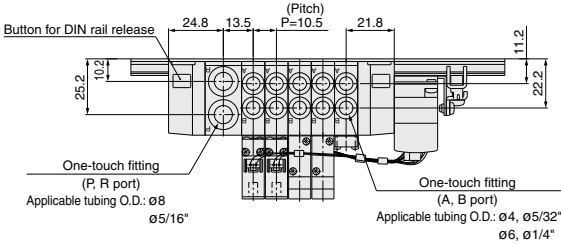



| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 |
| L2 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 |
| L3 | 70.5 | 81 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 |
| L4 | 16 | 17 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |

SY3000: SS5Y3-45S6A U-Stations B-C4, N3
C6, N7

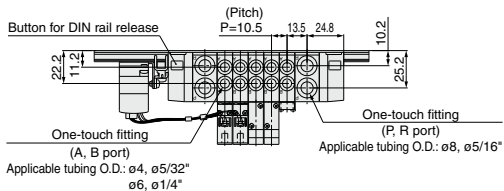


- SJ
- SY
- SY
- S0700
- S0700

With interface regulator (with gauge)

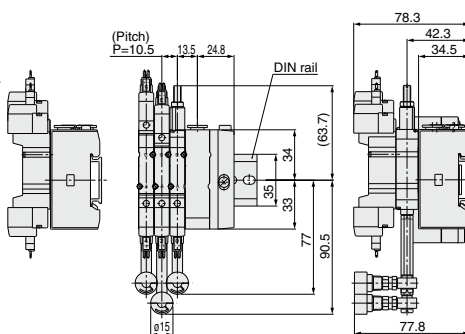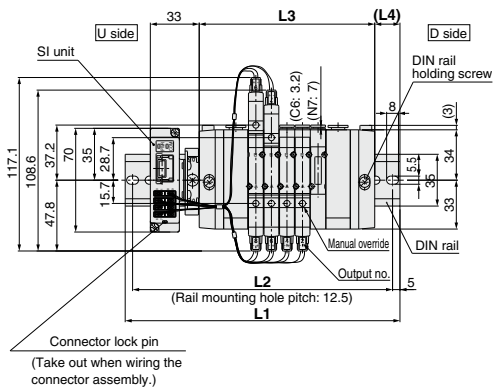





(Station n) --- (Station 1)

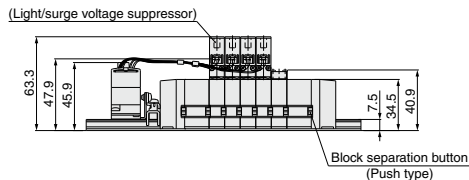

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 260.5 | 273 | 285.5 | 298 |
| L2 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 250 | 262.5 | 275 | 287.5 |
| L3 | 87 | 97.5 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 | 202.5 | 213 | 223.5 | 234 |
| L4 | 14 | 15 | 16 | 17 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 12.5 | 13.5 | 14.5 | 15.5 |


Dimensions

SY5000: SS5Y5-45S6A □ **D-Stations U-** C4, N3
C6, N7
C8, N9

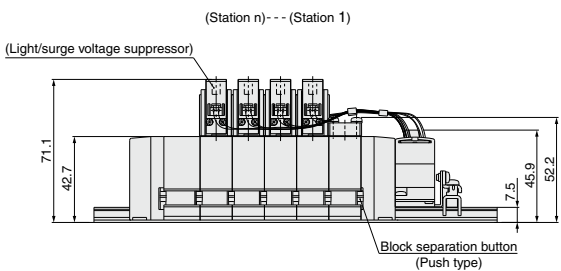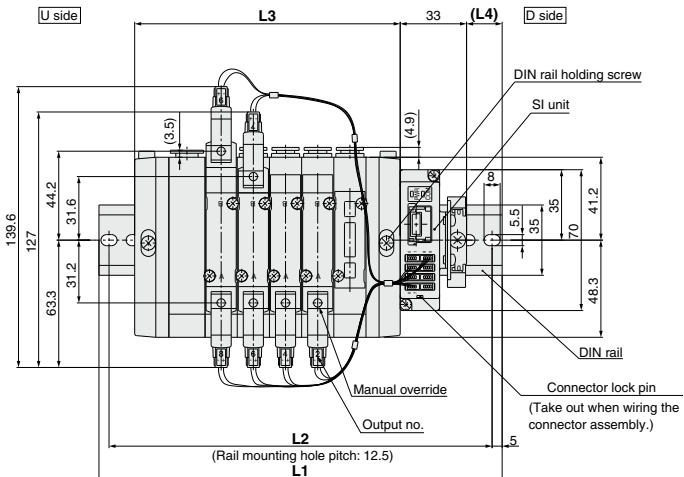
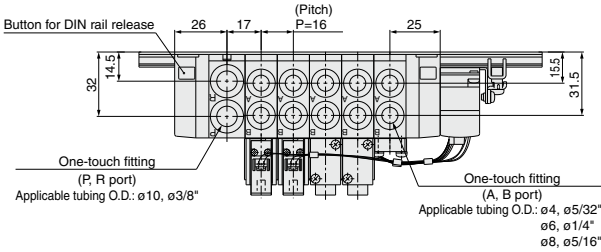


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 160.5 | 173 | 198 | 210.5 | 223 | 248 | 260.5 | 273 |
| L2 | 137.5 | 150 | 162.5 | 187.5 | 200 | 212.5 | 237.5 | 250 | 262.5 |
| L3 | 84 | 100 | 116 | 132 | 148 | 164 | 180 | 196 | 212 |
| L4 | 15.5 | 14 | 12 | 16.5 | 15 | 13 | 17.5 | 16 | 14 |


SY5000: SS5Y5-45S6A **U-Stations** **B-** C4, N3
C6, N7
C8, N9

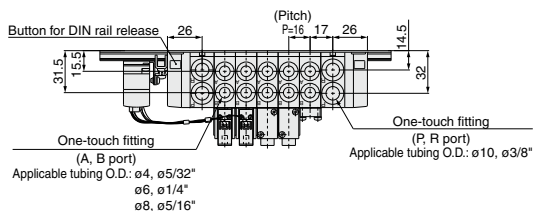

With interface regulator (with gauge)

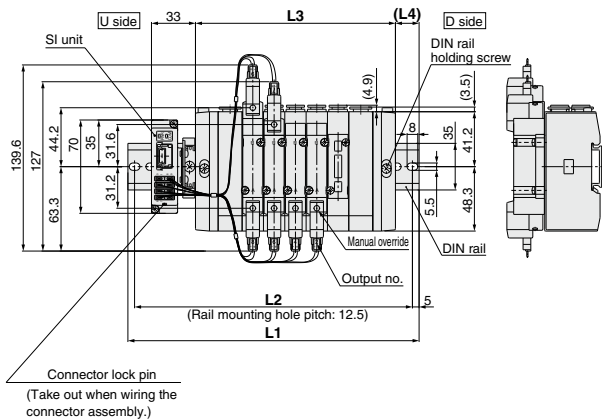

(Station n) --- (Station 1)

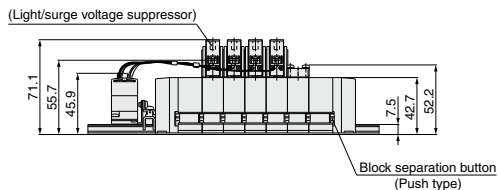

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 185.5 | 198 | 210.5 | 223 | 248 | 260.5 | 273 | 298 | 310.5 | 323 | 335.5 | 360.5 | 373 | 385.5 |
| L2 | 150 | 175 | 187.5 | 200 | 212.5 | 237.5 | 250 | 262.5 | 287.5 | 300 | 312.5 | 325 | 350 | 362.5 | 375 |
| L3 | 102 | 118 | 134 | 150 | 166 | 182 | 198 | 214 | 230 | 246 | 262 | 278 | 294 | 310 | 326 |
| L4 | 13 | 17.5 | 15.5 | 14 | 12 | 16.5 | 15 | 13 | 17.5 | 16 | 14 | 12.5 | 17 | 15 | 13.5 |

SJ

SY

SY

S0700



S0700

Manifold Option

■ Connector assembly

For single solenoid (SY3000-37-81A-□-□)

For double solenoid (SY3000-37-81A-□-□)



Connector assembly order no. (Can be used for the manifold without a specified layout (8 stations or less))
Integrated type

| Model | Part no. | Connector mounting position | |
|-------------------------|--------------------|-----------------------------|--|
| SS5Y3-45S6A | SY3000-37-81A-3-N | Single | : Starting from the SI unit side From unit 1 to unit 4 |
| | SY3000-37-81A-3-3 | Double/3 position | : Starting from the SI unit side From unit 1 to unit 4 |
| | SY3000-37-81A-4-N | Single | : Starting from the SI unit side From unit 5 to unit 8 |
| | SY3000-37-81A-4-4 | Double/3 position | : Starting from the SI unit side From unit 5 to unit 8 |
| SS5Y5-45S6A | SY3000-37-81A-4-N | Single | : Starting from the SI unit side From unit 1 to unit 4 |
| | SY3000-37-81A-4-4 | Double/3 position | : Starting from the SI unit side From unit 1 to unit 4 |
| | SY3000-37-81A-6-N | Single | : Starting from the SI unit side From unit 5 to unit 8 |
| | SY3000-37-81A-6-6 | Double/3 position | : Starting from the SI unit side From unit 5 to unit 8 |
| SS5Y9- ²³ SA | SY3000-37-81A-4-N | Single | : For 1 to 4 stations |
| | SY3000-37-81A-4-9 | Double/3 position | : For 1 to 4 stations |
| | SY3000-37-81A-6-N | Single | : For 5 to 8 stations |
| | SY3000-37-81A-6-11 | Double/3 position | : For 5 to 8 stations |


Note) The above is for the station addition or maintenance. When ordering a connector assembly separately, a number would not be printed on the connector.

■ Connector assembly

SY3000-37-80A-□

■ Housing (8 pcs./set)

SY3000-44-3A



Connector assembly order no. (Can be used for the manifold with a specified layout)

| Model | Part no. | Connector mounting position |
|-------------|------------------|---|
| SS5Y3-45S6A | SY3000-37-80A-3 | Starting from the SI unit side: From unit 1 to unit 4 |
| | SY3000-37-80A-4 | Starting from the SI unit side: From unit 5 to unit 8 |
| | SY3000-37-80A-6 | Starting from the SI unit side: From unit 9 to unit 12 |
| | SY3000-37-80A-7 | Starting from the SI unit side: From unit 13 to unit 16 |
| SS5Y5-45S6A | SY3000-37-80A-4 | Starting from the SI unit side: From unit 1 to unit 4 |
| | SY3000-37-80A-6 | Starting from the SI unit side: From unit 5 to unit 8 |
| | SY3000-37-80A-8 | Starting from the SI unit side: From unit 9 to unit 12 |
| | SY3000-37-80A-10 | Starting from the SI unit side: From unit 13 to unit 16 |

Note 1) The above is for station addition or maintenance. When ordering a connector assembly separately, a number will not be printed on the connector.


Note 2) After inserting the connector assembly into the housing, be sure to confirm that the lead wire will not come off by lightly pulling the wire.

Furthermore, do not reuse the lead wire after it has been inserted and removed.

Note 3) Wiring is set longer than the actual wiring distance.

Stacking Type/DIN Rail Mounted/Individual Wiring: Common Manifold Option

■ **Blanking plate assembly**



(The shape varies depending on the series.)

| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SX3000-75-1A(-Q) |
| SY5000 | SX5000-76-5A(-Q) |

* **Thread type**

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Caution

Mounting screw tightening torques

M2: 0.16 N·m
 M3: 0.8 N·m
 M4: 1.4 N·m

SJ

SY

SY

S0700

S0700

5 Port Solenoid Valve Base Mounted Manifold Stacking Type/DIN Rail Mounted/Plug-in


SY3000/5000 Series



Type **45**

How to Order Manifold

Type 45F (D-sub connector, 25 pins)



Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Common specifications

| | |
|-----|-----------------|
| NII | Positive common |
| N | Negative common |

Connector mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---|
| 02 | 2 stations | Single wiring spec. (Applicable up to 20 solenoid valves.) |
| : | : | |
| 20 | 20 stations | |

- * This also includes the number of blanking plate assemblies.
- * Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | (Both sides) | 2 to 20 stations |
| M | Special specifications | |

- * For special specifications, indicate separately by the manifold specification sheet.

A, B port size

| One-touch fitting (Metric size) | | | One-touch fitting (Inch size) | | |
|---------------------------------|--------------------------|-------------------|-------------------------------|--|-------------------|
| Symbol | Port size | Applicable series | Symbol | Port size | Applicable series |
| C4 | One-touch fitting for ø4 | SY3000 | N3 | One-touch fitting for ø $\frac{3}{32}$ " | SY3000 |
| C6 | One-touch fitting for ø6 | | N7 | One-touch fitting for ø $\frac{1}{4}$ " | |
| M | Mixed | | M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 | N3 | One-touch fitting for ø $\frac{3}{32}$ " | SY5000 |
| C6 | One-touch fitting for ø6 | | N7 | One-touch fitting for ø $\frac{1}{4}$ " | |
| C8 | One-touch fitting for ø8 | | N9 | One-touch fitting for ø $\frac{9}{16}$ " | |
| M | Mixed | | M | Mixed | |

- * In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)


CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

- * Refer to pages 616 to 620 for external pilot specifications and built-in silencer.

How to Order Manifold Assembly (Example)

Example (Type 45F/D-sub connector (25 pin))


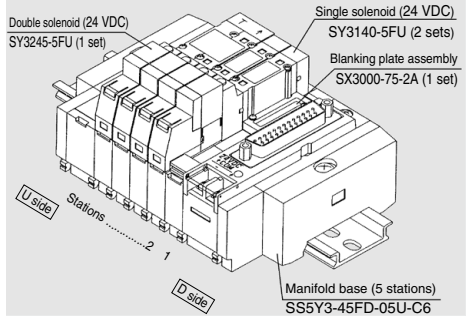


- SS5Y3-45FD-05U-C6 ... 1 set (Type 45F, D-sub connector 5-station manifold base part no.)
- * SX3000-75-2A 1 set (Blanking plate assembly part no.)
 - * SY3140-5FU 2 sets (Single solenoid part no.)
 - * SY3245-5FU 1 set (Double solenoid part no.)

→ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

- * The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of connector box.
- * When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.

How to Order Valve (Type 45F, 45P□, 45T, 45T1)



Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Dual body type (Double, 3 position) Manual override

| | |
|-----|--------------------------------|
| NII | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Made to Order

| | | |
|-----|--|----------------|
| NII | — | CE-compliant |
| X90 | Main valve fluororubber (Refer to page 624.) | Q CE-compliant |

- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 592 for details.)
- * With light/surge voltage suppressor (Non-polar type)

How to Order Manifold

Type 45P (Flat ribbon cable)

SS5Y 3 - 45 P D - 05 U - C4 - - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Common specifications

| | |
|-----|-----------------|
| Nil | Positive common |
| N | Negative common |

Connector poles

| Symbol | Poles | Stations |
|--------|-------|------------------|
| Nil | 26 | 2 to 20 stations |
| G | 20 | 2 to 16 stations |
| H | 10 | 2 to 8 stations |

Connector mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

• Voltage

| | |
|-----|--------|
| Nil | 24 VDC |
| 12V | 12 VDC |

• A, B port size

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

• One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø3/8" | SY3000 |
| N7 | One-touch fitting for ø1/4" | |
| M | Mixed | |
| N3 | One-touch fitting for ø3/8" | SY5000 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |
| M | Mixed | |

• One-touch fitting (Inch size)

* In the case of mixed specifications, indicate separately on the manifold specification sheet.

• SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 20 stations |
| M | Special specifications | |

• Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Valve stations (Blanking plate assemblies are included.)

26 pins (P) connector

| Symbol | Stations | Note |
|--------|-------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 20 solenoid valves.) |
| : | : | |
| 20 | 20 stations | |

20 pins (PG) connector

| Symbol | Stations | Note |
|--------|-------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 16 solenoid valves.) |
| : | : | |
| 16 | 16 stations | |

10 pins (PH) connector

| Symbol | Stations | Note |
|--------|------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 8 solenoid valves) |
| : | : | |
| 08 | 8 stations | |

* Two stations are necessary for the double, 3 position (Dual body type).

The SS5Y3/5-45T/1□ type plug-in terminal block manifold is to be discontinued as of December 2019. Therefore, we recommend considering the SY3000/5000/7000 plug-in connector connecting base terminal block box type manifold as a substitute. (Click here for details.) However, keep in mind that there is no specification or mounting compatibility between the two products.

Type 45T (9 pins terminal block)

SS5Y 3 - 45T D - 05 U - C4 - - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Terminal block mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 8 solenoid valves) |
| : | : | |
| 08 | 8 stations | |

* This also includes the number of blanking plate assemblies.
* Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|-----------------|
| U | U side | 2 to 8 stations |
| D | D side | 2 to 8 stations |
| B | Both sides | 2 to 8 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

• A, B port size

• One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

• One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø3/8" | SY3000 |
| N7 | One-touch fitting for ø1/4" | |
| M | Mixed | |
| N3 | One-touch fitting for ø3/8" | SY5000 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |
| M | Mixed | |

* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

Type 45T1 (18 pins terminal block)

SS5Y 3 - 45T1 D - 15 B - C4 - - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Terminal block mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 17 solenoid valves.) |
| : | : | |
| 17 | 17 stations | |

* This also includes the number of blanking plate assemblies.
* Two stations are necessary for the double, 3 position (Dual body type).

• SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 17 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

• A, B port size

• One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |


• One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø3/8" | SY3000 |
| N7 | One-touch fitting for ø1/4" | |
| M | Mixed | |
| N3 | One-touch fitting for ø3/8" | SY5000 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |
| M | Mixed | |

* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.

Note) The terminal block (45T□) manifold has no common polarity. It can be used for both positive and negative common.

Manifold Specifications

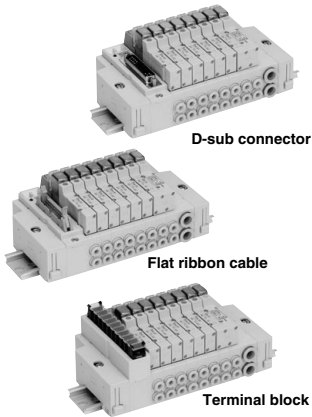

| | | | | | | |
|--------------------------------------|--------|---|--|--|--|----------------------------------|
| Model | | D-sub connector Type 45F | Flat ribbon cable Type 45PI | | Terminal block | |
| Manifold | | Plug-in | | | | |
| P (SUP)/R (EXH) | | Common SUP, Common EXH | | | | |
| Valve stations ^{Note 1, 2)} | | 2 to 20 stations | 2 to 16 stations | 2 to 8 stations | 2 to 17 stations | |
| A, B port | | Base | | | | |
| Porting specifications | | Direction | | | | |
| Port size | | Side | | | | |
| P, R port | SY3000 | C8 (One-touch fitting for ø8) | | | | |
| | SY5000 | C10 (One-touch fitting for ø10) | | | | |
| | SY3000 | C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6) | | | | |
| A, B port | SY3000 | C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6)/C8 (One-touch fitting for ø8) | | | | |
| | SY5000 | C4 (One-touch fitting for ø4)/C6 (One-touch fitting for ø6)/C8 (One-touch fitting for ø8) | | | | |
| Applicable connector | | D-sub connector Complies with MIL-C-24308 JIS-X-5101 | Flat ribbon cable connector Socket: 20 pin MIL type with strain relief Conforming to MIL-C-8830 | Flat ribbon cable connector Socket: 20 pin MIL type with strain relief Conforming to MIL-C-8830 | Flat ribbon cable connector Socket: 10 pin MIL type with strain relief Conforming to MIL-C-8830 | Terminal block (M3) 9 pins |
| Internal wiring | | +COM (Type 45□), -COM (Type 45N□) | | | In common between +COM and -COM. | |
| Manifold base weight W (g) | | SY3000 | 2 to 10 stations: W = 26n + 172 11 to 20 stations: W = 26n + 199 | | | |
| n: Stations (D-sub connector) | | SY5000 | 2 to 10 stations: W = 54n + 227 11 to 20 stations: W = 52n + 264 | | | |

Note 1) For more than 11 stations, supply pressure to P port on both sides and exhaust from R port on both sides.
 Note 2) There is a limit depending on the number of solenoids. Refer to "How to Order".

Flow Rate Characteristics

| Model | Port size | | Flow rate characteristics | | | | | |
|-----------|------------------------|----------------|----------------------------|------|------|----------------------------|------|------|
| | 1, 5, 3 (P, EA, EB) | 4, 2 (A, B) | 1 → 4/2 (P → A/B) | | | 4/2 → 5/3 (A/B → EA/EB) | | |
| | | | C (dm ³ /s-bar) | b | Cv | C (dm ³ /s-bar) | b | Cv |
| SS5Y3-45□ | C8 | C6 | 0.88 | 0.21 | 0.22 | 0.95 | 0.18 | 0.22 |
| SS5Y5-45□ | C10 | C8 | 2.2 | 0.24 | 0.53 | 2.5 | 0.18 | 0.58 |


Note) The value is for manifold base with 5 stations and individually operated 2 position type.

SJ
SY
SY
S0700
S0700

Manifold Option

D-sub connector (25 pins)/Cable assembly

015
AXT100-DS25- 030
050

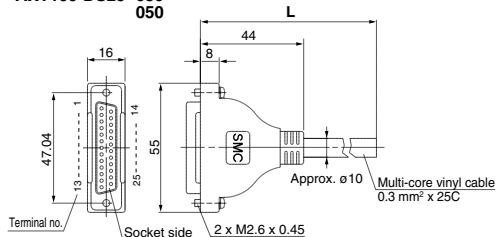

D-sub connector cable

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|------------------------|
| 1.5 m | AXT100-DS25-015 | Cable 25 core x 24 AWG |
| 3 m | AXT100-DS25-030 | |
| 5 m | AXT100-DS25-050 | |

* When a commercially available connector is required, use a 25 pin female connector conforming to MIL-C24308.

Electric characteristics

| Item | Characteristics |
|-------------------------------------|-----------------|
| Conductor resistance Ω/km, 20°C | 65 or less |
| Voltage limit V, 1 min, AC | 1000 |
| Insulation resistance MΩkm, 20°C | 5 or more |


Note) The min. bending radius of D-sub cable assembly is 20 mm.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.

Flat Ribbon Cable Connector/Cable assembly

AXT100-FC □ $\frac{1}{3}$

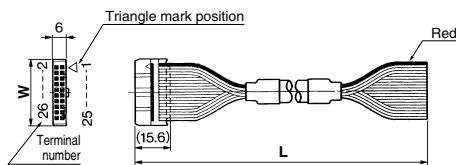

Flat Ribbon Cable Assembly

| Cable length (L) | 10 pins | 20 pins | 26 pins |
|---------------------|---------------|---------------|---------------|
| 1.5 m | AXT100-FC10-1 | AXT100-FC20-1 | AXT100-FC26-1 |
| 3 m | AXT100-FC10-2 | AXT100-FC20-2 | AXT100-FC26-2 |
| 5 m | AXT100-FC10-3 | AXT100-FC20-3 | AXT100-FC26-3 |
| Connector width (W) | 17.2 | 30 | 37.5 |

* For other commercial connectors, use a type with strain relief that conform to MIL-C-83503.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.

D-sub connector cable assembly

Terminal numbers


| Terminal no. | Lead wire color | Dot marking |
|--------------|-----------------|-------------|
| 1 | Black | None |
| 2 | Brown | None |
| 3 | Red | None |
| 4 | Orange | None |
| 5 | Yellow | None |
| 6 | Pink | None |
| 7 | Blue | None |
| 8 | Purple | White |
| 9 | Gray | Black |
| 10 | White | Black |
| 11 | White | Red |
| 12 | Yellow | Red |
| 13 | Orange | Red |
| 14 | Yellow | Black |
| 15 | Pink | Black |
| 16 | Blue | White |
| 17 | Purple | None |
| 18 | Gray | None |
| 19 | Orange | Black |
| 20 | Red | White |
| 21 | Brown | White |
| 22 | Pink | Red |
| 23 | Gray | Red |
| 24 | Black | White |
| 25 | White | None |

Dimensions/DIN rail

VZ1000-11-1-□

Refer to L dimensions

* Fill in □ with an appropriate no. listed on the table of DIN rail dimensions shown below.




| No. | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L Dimension | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 |
| No. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| L Dimension | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 |
| No. | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| L Dimension | 373 | 385.5 | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 | 473 | 485.5 | 498 |
| No. | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 |
| L Dimension | 510.5 | 523 | 535.5 | 548 | 560.5 | 573 | 585.5 | 598 | 610.5 | 623 | 635.5 |
| No. | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 |
| L Dimension | 648 | 660.5 | 673 | 685.5 | 698 | 710.5 | 723 | 735.5 | 748 | 760.5 | 773 |
| No. | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 |
| L Dimension | 785.5 | 798 | 810.5 | 823 | 835.5 | 848 | 860.5 | 873 | 885.5 | 898 | 910.5 |
| No. | 66 | 67 | 68 | 69 | 70 | 71 | | | | | |
| L Dimension | 923 | 935.5 | 948 | 960.5 | 973 | 985.5 | | | | | |

* Refer to L1 dimension on pages starting with pages 574 to 591 for lengths that correspond to the number of manifold stations.


Manifold Internal Wiring

45(N)F/D-sub Connector


A D-sub connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.



<For positive common (45F)>

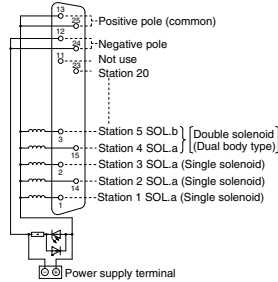


<For negative common (45NF)>

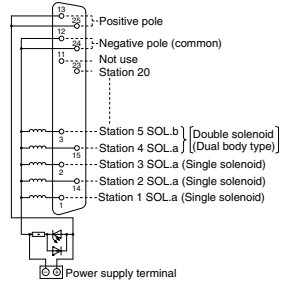


- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

Type 45(N)P/Flat Ribbon Cable (26 pins)


A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.




<For positive common (45P)>



<For negative common (45NP)>

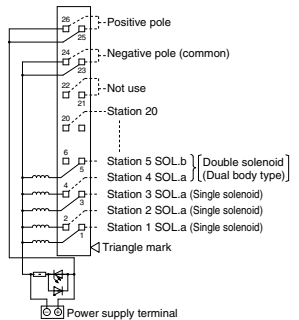




- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 20 manifold stations, with up to 20 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.



Manifold Internal Wiring

Type 45(N)PG/Flat Ribbon Cable (20 pins)




A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

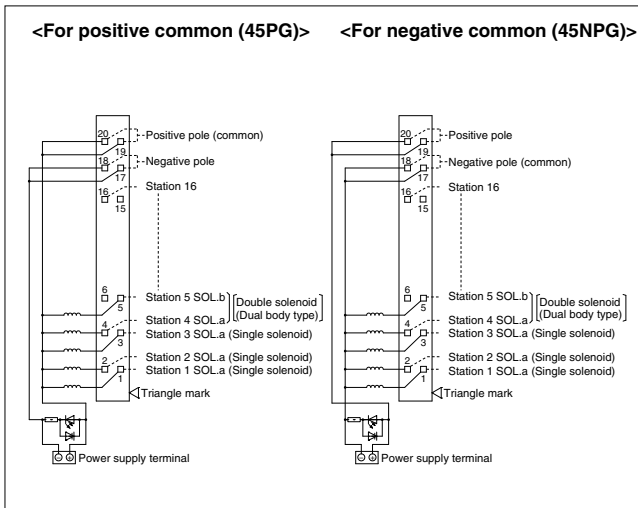

- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 16 manifold stations, with up to 16 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.

Type 45(N)PH/Flat Ribbon Cable (10 pins)

A flat ribbon cable connector used for electric wiring reduces labor during wiring operation. Connectors conforming to MIL are used for interchangeability.

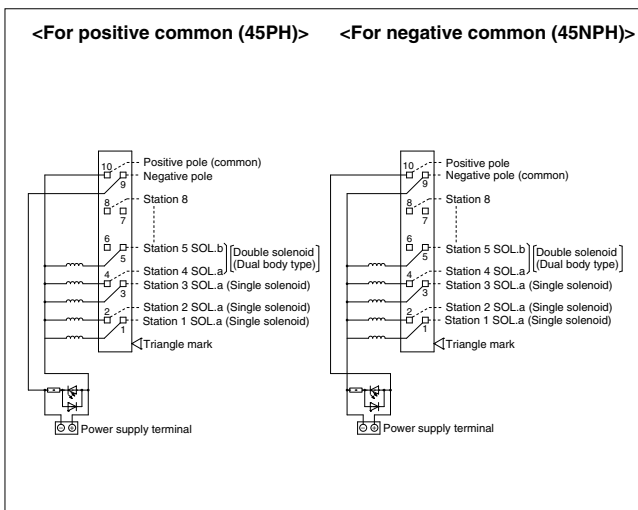


- The power source terminal is used for connecting to an external power source.
- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.


Manifold Internal Wiring

Type 45T/Terminal Block

A terminal block type permits direct cable connection without treatment of lead wires.




(45T)

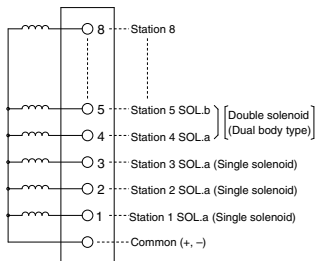


- The maximum number of stations that can be accommodated is 8 manifold stations, with up to 8 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.

Type 45T1/Terminal Block

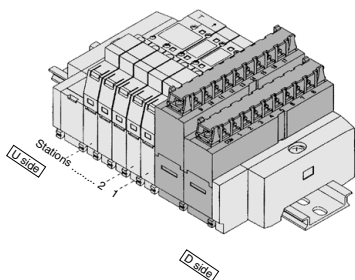

(45T1)

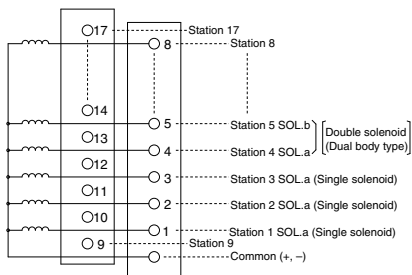

- The maximum number of stations that can be accommodated is 17 manifold stations, with up to 17 solenoids. (For more stations, please contact SMC.)
- Regardless of the connector mounting position, stations are to be counted from D side as the 1st one.
- There is no polarity in the COM wiring. Supply positive power for +COM spec. and negative power for -COM spec.

SJ

SY

SY


S0700

S0700


How to Connect SS5Y□-45□ (Plug-in)

Power terminal is equipped with plug-in manifold of the SY series as standard. Power terminal enables the power supply to valve from either of manifold or controller side. The wiring examples should be used for reference when wiring is performed.

1. Wiring example when using manifold power supply terminals

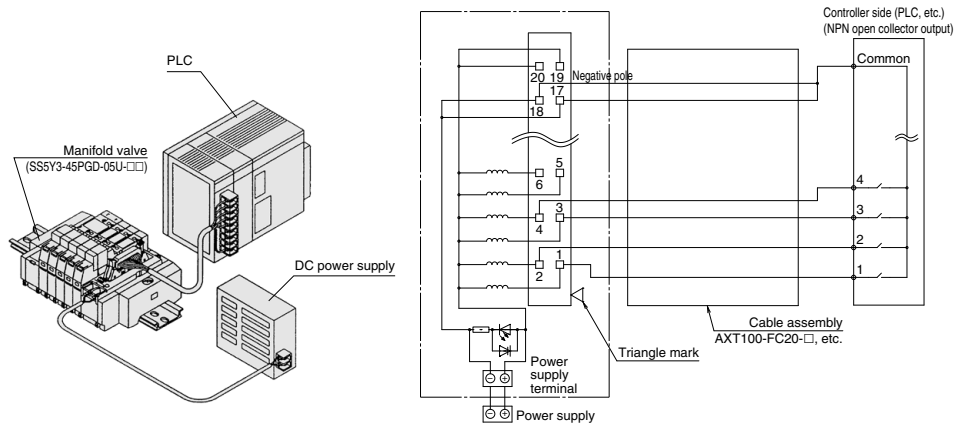

2. Wiring example when not using manifold power supply terminals (Power is supplied to the controller side or along the wiring, etc.)

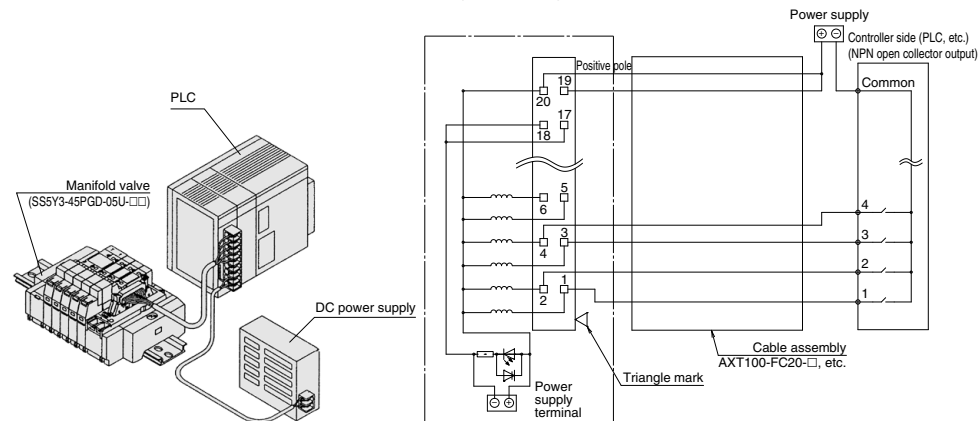


⚠ Caution

- Single wire, COM position, etc. of PLC are different from each manufacturer. When connecting with PLC, read the specifications carefully and understand the electrical circuit. Poor wiring could cause damage to PLC, power source, etc. as well as manifold and valve.


| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

SY3000: D-sub Connector/Plug-in

**SS5Y3-45FU- Stations D- C4, N3
C6, N7**

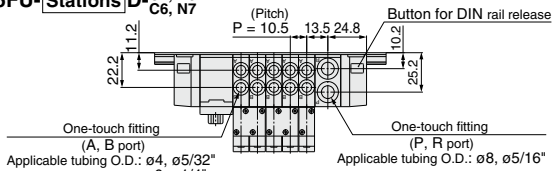


Note) The L1 to L4 dimensions of **SS5Y3-45FU- Stations U- C4, N3
C6, N7** are identical to those of **SS5Y3-45FU- Stations D- C4, N3
C6, N7**.

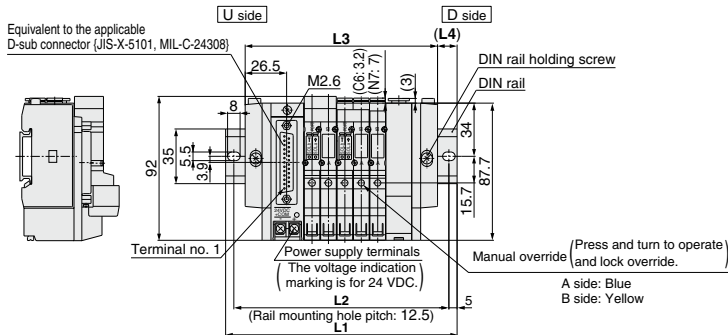


A side: Blue
B side: Yellow

(Station n) --- (Station 1)




| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| L2 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |

**SS5Y3-45FU- Stations B- C4, N3
C6, N7**

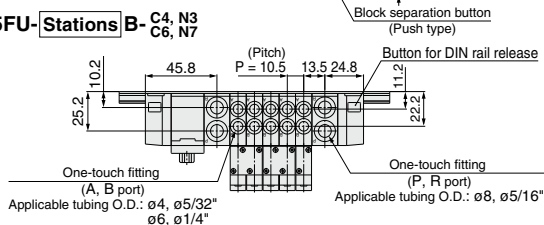

Equivalent to the applicable
D-sub connector (JIS-X-5101, MIL-C-24308)

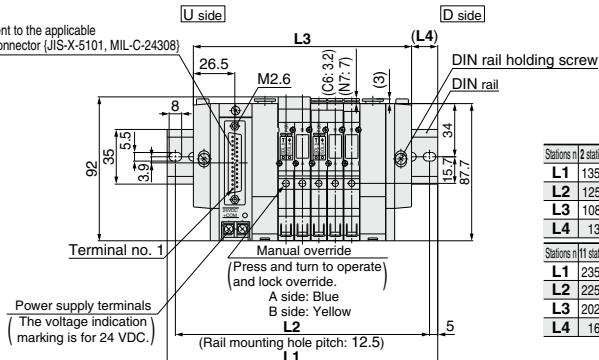


Power supply terminals
(The voltage indication
marking is for 24 VDC.)

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 |
| L2 | 125 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 |
| L4 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 |



| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 |
| L2 | 225 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 | 297 |
| L4 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 |

SY3000: D-sub Connector/Plug-in

**SS5Y3-45FD- Stations U-C₄, N₃
C₆, N₇**

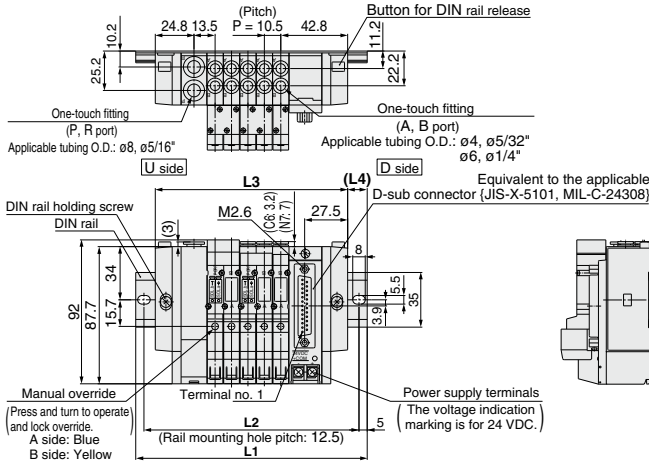


(Note) The L1 to L4 dimensions of **SS5Y3-45FD- Stations D-C₄, N₃** are identical to those of **SS5Y3-45FD- Stations U-C₄, N₃**.

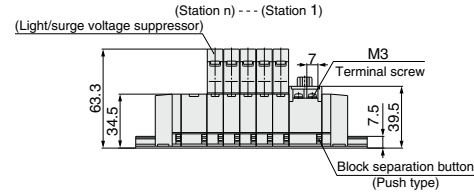

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| L2 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |

**SS5Y3-45FD- Stations B-C₄, N₃
C₆, N₇**

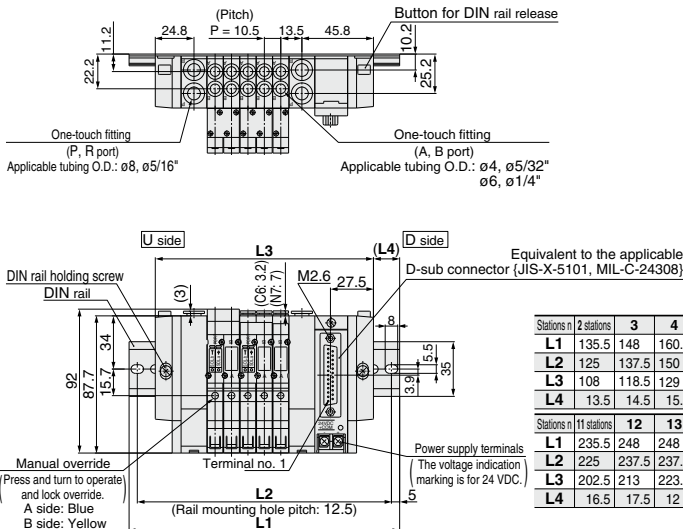


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 |
| L2 | 125 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 |
| L4 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 |



| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 |
| L2 | 225 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 | 297 |
| L4 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 |

SY5000: D-sub Connector/Plug-in

SS5Y5-45FU- Stations D- C4, N3
C6, N7
C8, N9


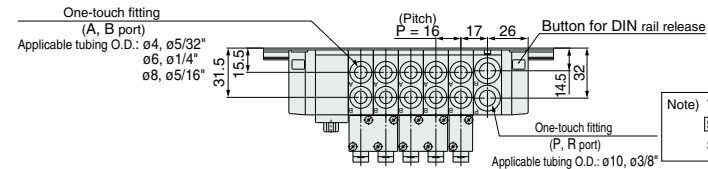


Note) The L1 to L4 dimensions of **SS5Y5-45FU- Stations U-** C4, N3
C6, N7 are identical to those of **SS5Y5-45FU- Stations D-** C4, N3
C6, N7.

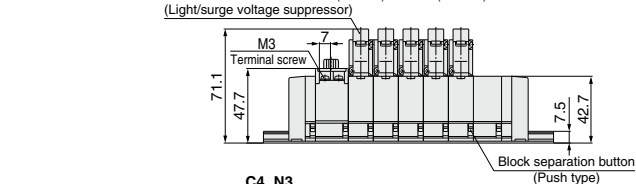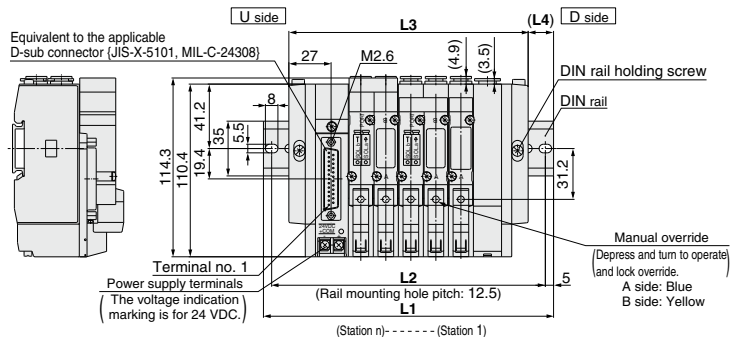

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 |
| L2 | 125 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 250 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 |

SS5Y5-45FU- Stations B- C4, N3
C6, N7
C8, N9

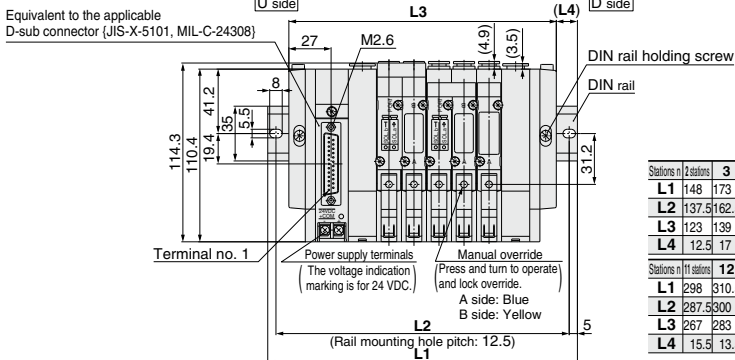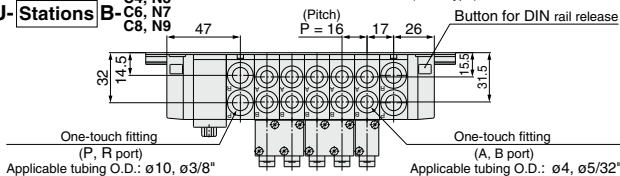


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 |
| L2 | 137.5 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 12.5 | 17 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 |


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 298 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 | 423 | 435.5 |
| L2 | 287.5 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 | 412.5 | 425 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 | 363 | 379 | 395 | 411 |
| L4 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |

SY5000: D-sub Connector/Plug-in


SS5Y5-45FD- Stations U- C4, N3
C6, N7
C8, N9

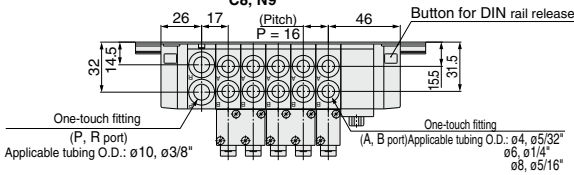

Note) The L1 to L4 dimensions of **SS5Y5-45FD- Stations U-** C4, N3, C6, N7 are identical to those of **SS5Y5-45FD- Stations U-** C4, N3, C8, N9


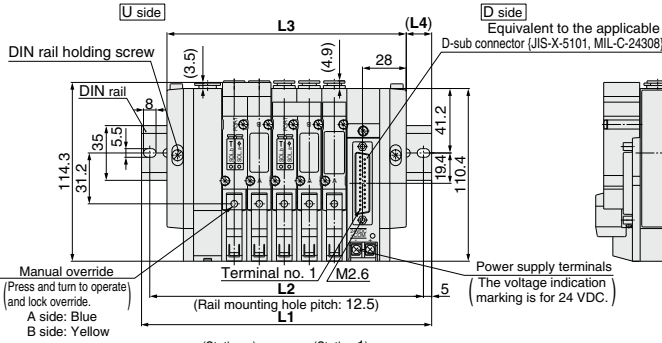


(Station n) - - - - - (Station 1)

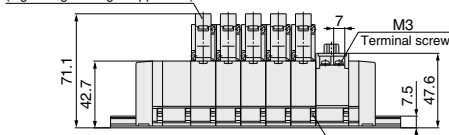

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 |
| L2 | 125 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 250 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 |

SS5Y5-45FD- Stations B- C4, N3
C6, N7
C8, N9

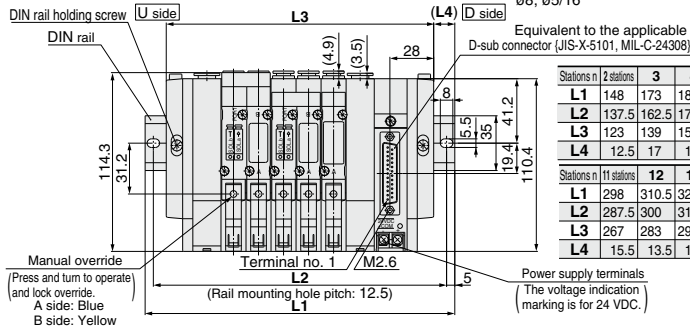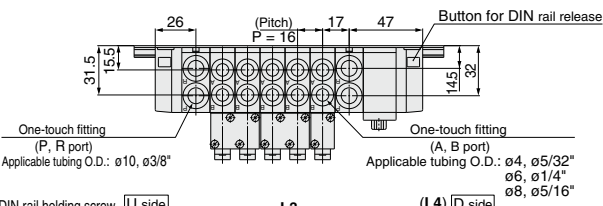


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 |
| L2 | 137.5 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 12.5 | 17 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 298 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 | 423 | 435.5 |
| L2 | 287.5 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 | 412.5 | 425 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 | 363 | 379 | 395 | 411 |
| L4 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |




SJ
SY
SY
S0700
S0700

SY3000: Flat Ribbon Cable/Plug-in



SS5Y3-45PU - Stations D-C₄, N₃ C₆, N₇ (26 pins)

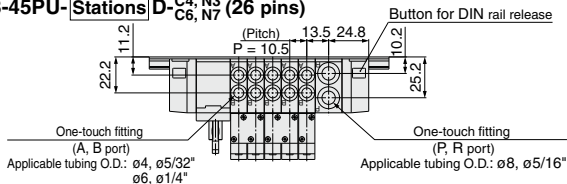

Note) The L1 to L4 dimensions of SS5Y3-45PU - Stations U-C₄, N₃ C₆, N₇ are identical to those of SS5Y3-45PIU - Stations D-C₄, N₃ C₆, N₇.

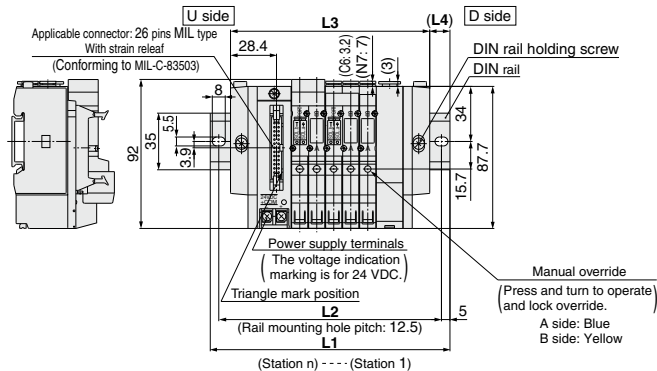

SS5Y3-45PU - Stations B-C₄, N₃ C₆, N₇ (26 pins)

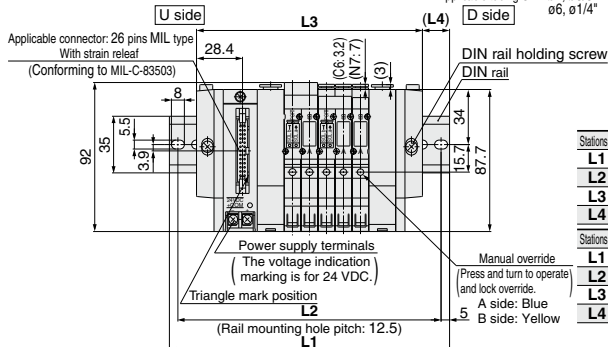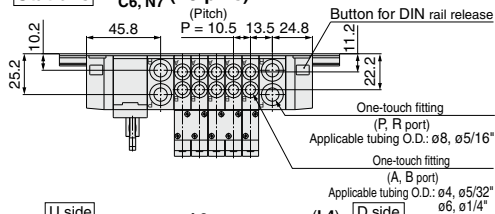


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| L2 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 |
| L2 | 225 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 | 297 |
| L4 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 |

SY3000: Flat Ribbon Cable/Plug-in

SS5Y3-45PD- Stations U, C₄, N₃ (26 pins)


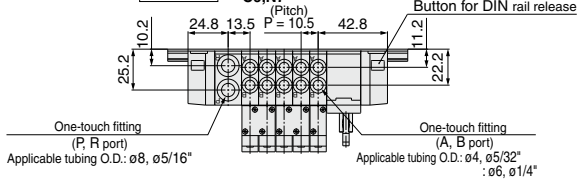


(Note) The L1 to L4 dimensions of **SS5Y3-45P□D- Stations U, C₄, N₃** are identical to those of **SS5Y3-45P□D- Stations U, C₄, N₃**.

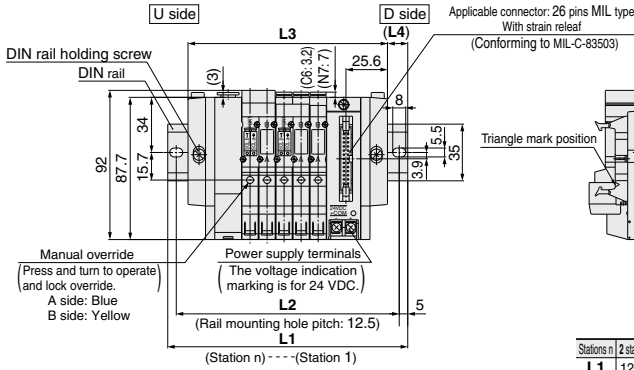

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 |
| L2 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |

SS5Y3-45PD- Stations B, C₄, N₃ (26 pins)

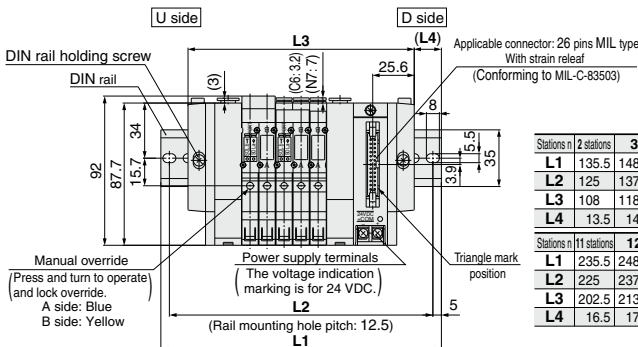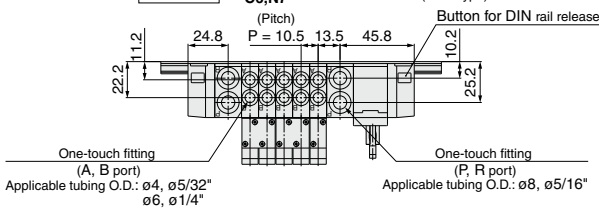


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 |
| L2 | 125 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 |
| L4 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 |
| L2 | 225 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 | 297 |
| L4 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 |




JS
SY
SY
S0700
S0700

SY5000: Flat Ribbon Cable/Plug-in

SS5Y5-45PU - Stations D- ^{C4, N3}_{C6, N7} (26 pins)


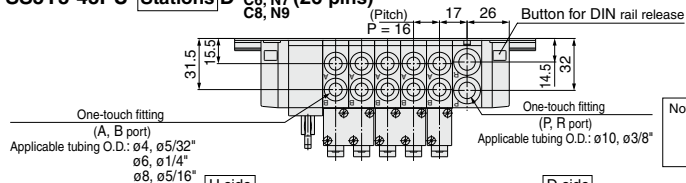


Note) The L1 to L4 dimensions of **SS5Y5-45P□U- Stations U-** ^{C4, N3}_{C6, N7} are identical to those of **SS5Y5-45P□U- Stations D-** ^{C4, N3}_{C6, N7}

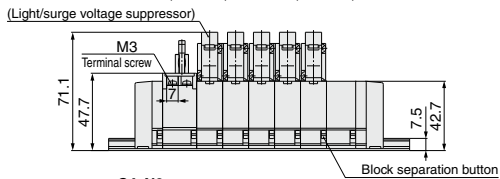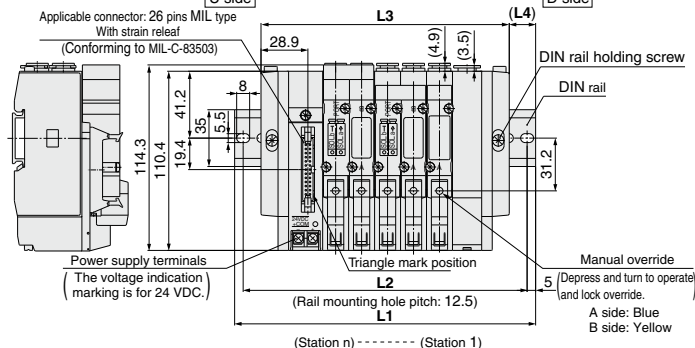

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 |
| L2 | 125 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 250 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 |

SS5Y5-45PU - Stations B- ^{C4, N3}_{C6, N7} (26 pins)

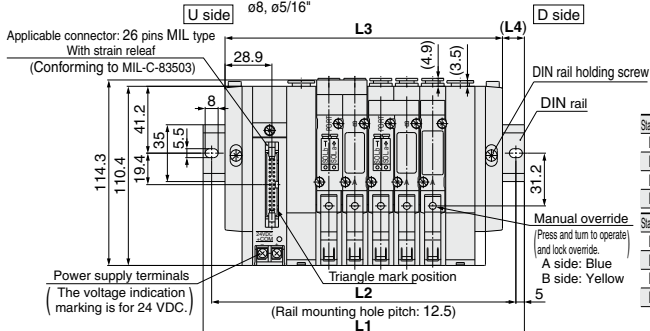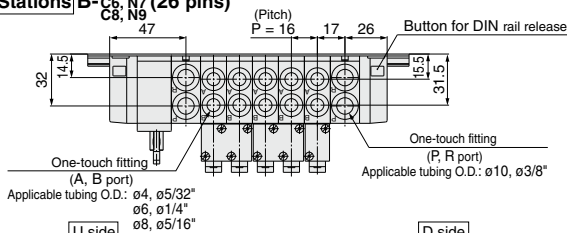


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 |
| L2 | 137.5 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 12.5 | 17 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 |



| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 298 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 | 423 | 435.5 |
| L2 | 287.5 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 | 412.5 | 425 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 | 363 | 379 | 395 | 411 |
| L4 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |

SY5000: Flat Ribbon Cable/Plug-in

SS5Y5-45PD-(Stations) U-^{C4, N3}_{C6, N7} (26 pins)
^{C8, N9}


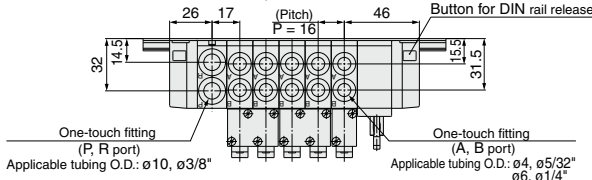


Note) The L1 to L4 dimensions of **SS5Y5-45PD-^{C4, N3}_{C6, N7}** (Stations) D-^{C4, N3}_{C6, N7} are identical to those of **SS5Y3-45PD-(Stations) U-^{C4, N3}_{C6, N7}**

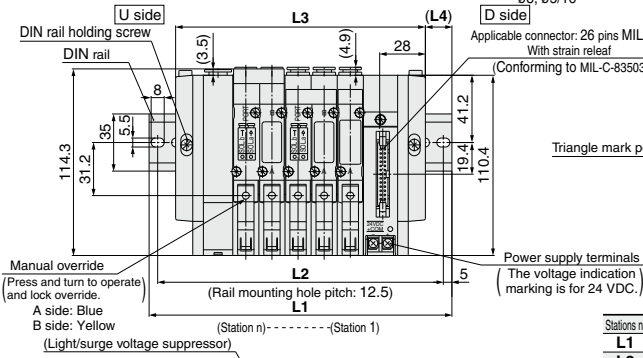

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 |
| L2 | 125 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 250 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 | 15.5 | 13.5 |

SS5Y5-45PD-(Stations) B-^{C4, N3}_{C6, N7} (26 pins)
^{C8, N9}

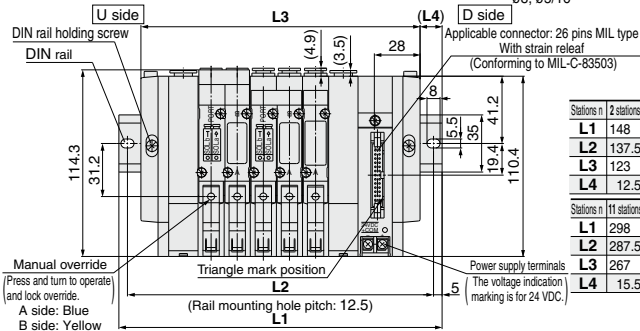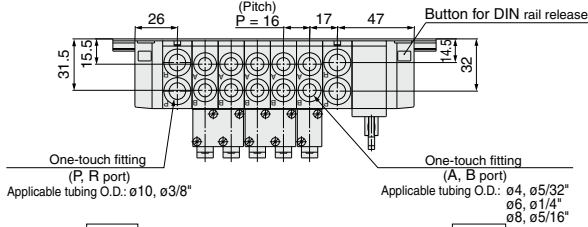


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 |
| L2 | 137.5 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 12.5 | 17 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 | 17 |


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 298 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 | 423 | 435.5 |
| L2 | 287.5 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 | 412.5 | 425 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 | 363 | 379 | 395 | 411 |
| L4 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |

SY3000: 9 Pins Terminal Block/Plug-in

SS5Y3-45TU-Stations D-C₄, N₃ C₆, N₇ (9 pins)

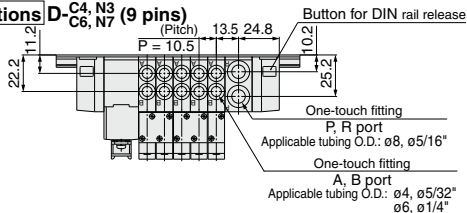

Note) The L1 to L4 dimensions of **SS5Y3-45TU-**
[Stations]U-C₄, N₃ SS5Y3-45TD-[Stations]U-C₄, N₃
SS5Y3-45TD-[Stations]D-C₄, N₃ are identical
 those of SS5Y3-45TU-[Stations]D-C₄, N₃
 C₆, N₇.

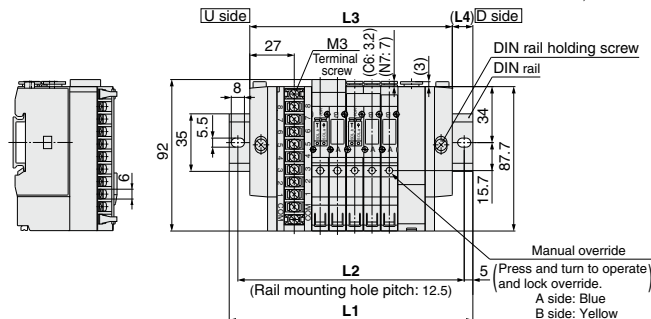


(Light/surge voltage suppressor) (Station n)---(Station 1)




| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 stations |
|------------|------------|-------|-------|-------|-------|-------|------------|
| L1 | 123 | 135.5 | 148 | 148 | 160.5 | 173 | 185.5 |
| L2 | 112.5 | 125 | 137.5 | 137.5 | 150 | 162.5 | 175 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 |

SS5Y3-45TU-Stations B-C₄, N₃ C₆, N₇ (9 pins)

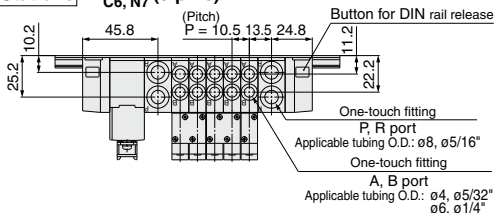


Note) The L1 to L4 dimensions of **SS5Y3-45TD-**
[Stations]B-C₄, N₃ are identical to those of
SS5Y3-45TU-[Stations]B-C₄, N₃.

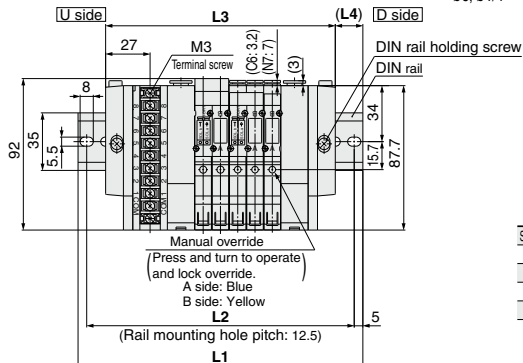

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 stations |
|------------|------------|-------|-------|-------|-------|-------|------------|
| L1 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 |
| L2 | 125 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 |
| L4 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 |

SY5000: 9 Pins Terminal Block/Plug-in

SS5Y5-45TU- Stations D-^{C4, N3}_{C6, N7} (9 pins)

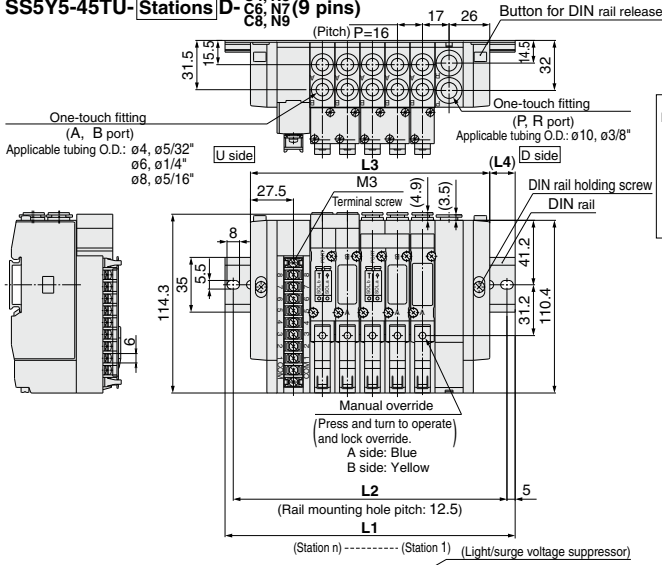


Note) The L1 to L4 dimensions of SS5Y5-45TU-

Stations U-^{C4, N3}_{C6, N7} SS5Y5-45TD- Stations U-^{C4, N3}_{C6, N7}

SS5Y5-45TD- Stations D-^{C4, N3}_{C6, N7} are identical those of SS5Y5-45TU- Stations D-^{C4, N3}_{C6, N7}

| Stations n (2 stations) | 3 | 4 | 5 | 6 | 7 | 8 stations |
|-------------------------|-------|-------|-------|-------|-------|------------|
| L1 | 135.5 | 148 | 160.5 | 185.5 | 198 | 210.5 |
| L2 | 125 | 137.5 | 150 | 175 | 187.5 | 200 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 |
| L4 | 15 | 13.5 | 11.5 | 16 | 14.5 | 12.5 |

SS5Y5-45TU- Stations B-^{C4, N3}_{C6, N7} (9 pins)

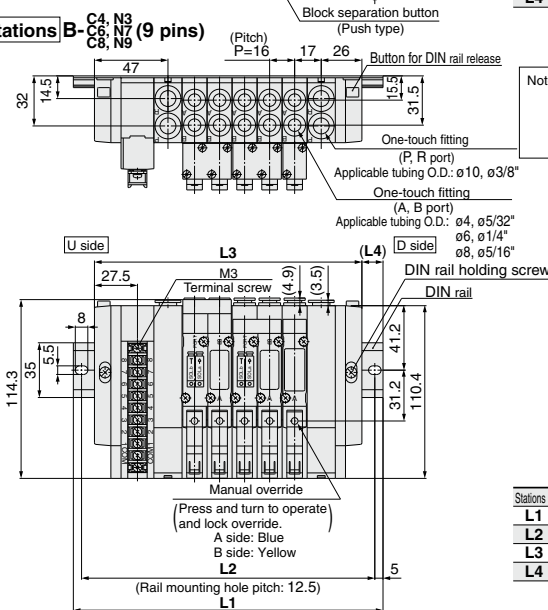

Note) The L1 to L4 dimensions of SS5Y5-45TD-


Stations B-^{C4, N3}_{C6, N7} are identical to those of

SS5Y5-45TU- Stations B-^{C4, N3}_{C6, N7}


| Stations n (2 stations) | 3 | 4 | 5 | 6 | 7 | 8 stations |
|-------------------------|-------|-------|-------|-------|-------|------------|
| L1 | 148 | 173 | 185.5 | 198 | 210.5 | 235.5 |
| L2 | 137.5 | 162.5 | 175 | 187.5 | 200 | 225 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 |
| L4 | 12.5 | 17 | 15 | 13.5 | 11.5 | 14.5 |

SY3000: 18 Pins Terminal Block/Plug-in

SS5Y3-45T1U-Stations D-C₄, N₃ C₆, N₇ (18 pins)


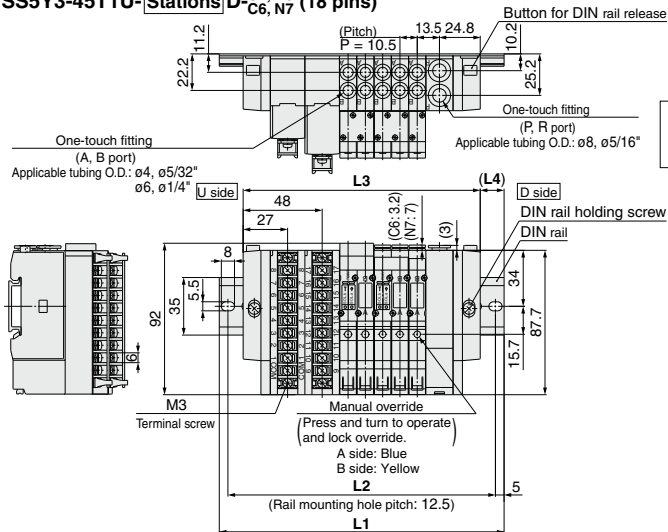


Note) The L1 to L4 dimensions of **SS5Y3-45T1U-Stations U-C₄, N₃** are identical to those of **SS5Y3-45T1U-Stations D-C₄, N₃**.

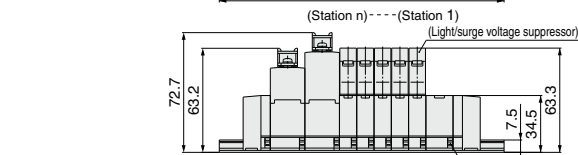

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 210.5 | 223 |
| L2 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 200 | 212.5 |
| L3 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 | 186 | 196.5 |
| L4 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12 | 13 |

SS5Y3-45T1U-Stations B-C₄, N₃ C₆, N₇ (18 pins)

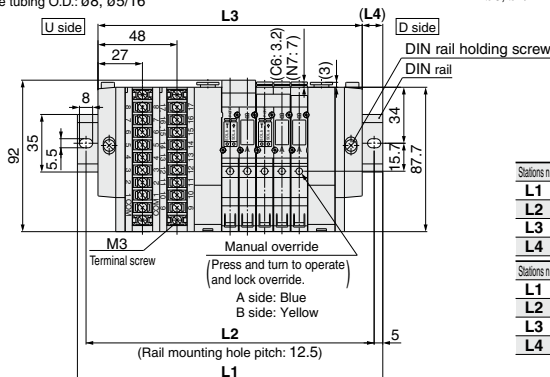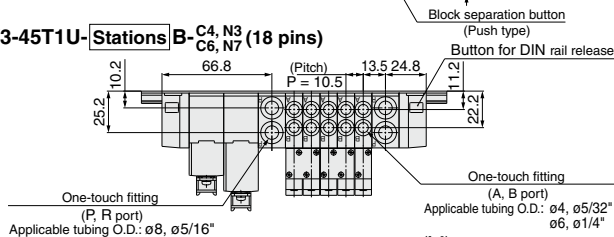


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|------------|
| L1 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 |
| L2 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 | 225 |
| L3 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 | 202.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 |


| Stations n | 10 stations | 11 | 12 | 13 | 14 | 15 | 16 | 17 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 |
| L2 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 |
| L3 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 |
| L4 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 |

SY3000: 9 Pins Terminal Block/Plug-in


SS5Y3-45T1D- Stations U- C4, N3 / C6, N7 (18 pins)

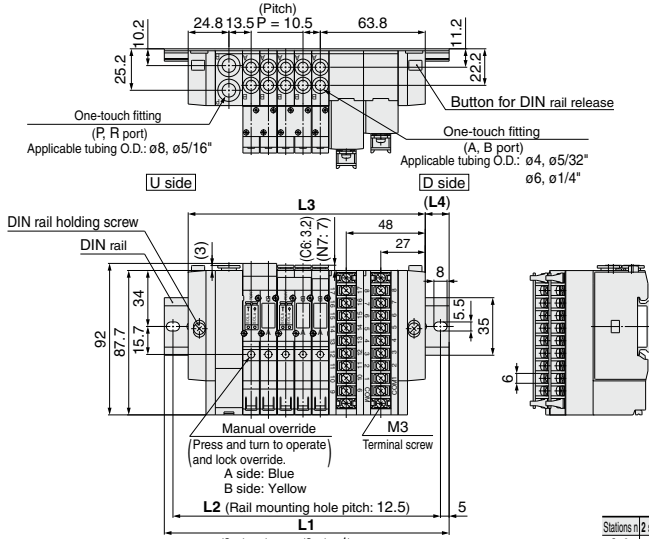

Note) The L1 to L4 dimensions of **SS5Y3-45T1D- Stations U- C4, N3 / C6, N7** are identical to those of **SS5Y3-45T1D- Stations U- C4, N3 / C6, N7**.

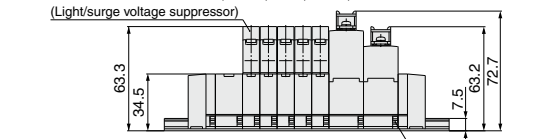

SS5Y3-45T1D- Stations B- C4, N3 / C6, N7 (18 pins)

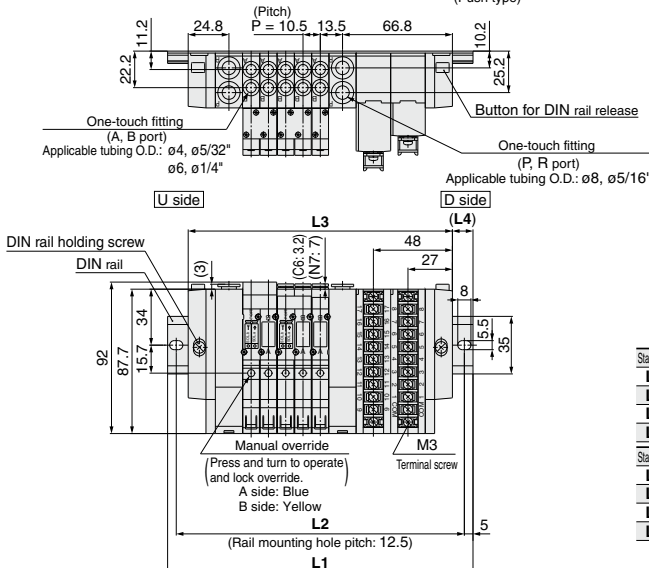

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 210.5 | 223 |
| L2 | 137.5 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 200 | 212.5 |
| L3 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 | 186 | 196.5 |
| L4 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12 | 13 |


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|------------|
| L1 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 |
| L2 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 | 225 |
| L3 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 | 202.5 |
| L4 | 15.5 | 16.5 | 17.5 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 |

| Stations n | 10 stations | 11 | 12 | 13 | 14 | 15 | 16 | 17 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 |
| L2 | 237.5 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 |
| L3 | 213 | 223.5 | 234 | 244.5 | 255 | 265.5 | 276 | 286.5 |
| L4 | 17.5 | 12 | 13 | 14 | 15 | 16 | 17 | 12 |

SJ
SY
SY
S0700
S0700

SY5000: 18 Pins Terminal Block/Plug-in


SS5Y5-45T1U - Stations D-C₄, N₃, C₆, N₇, C₈, N₉ (18 pins)

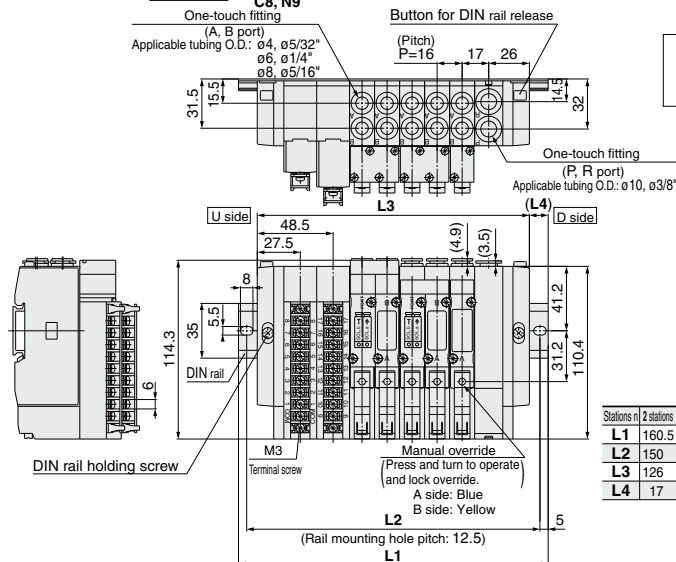

Note) The L1 to L4 dimensions of SS5Y5-45T1U - Stations U-C₄, N₃, C₆, N₇, C₈, N₉ are identical to those of SS5Y5-45T1U - Stations D-C₄, N₃, C₆, N₇, C₈, N₉

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 173 | 185.5 | 198 | 223 | 235.5 | 248 | 273 | 285.5 |
| L2 | 150 | 162.5 | 175 | 187.5 | 212.5 | 225 | 237.5 | 262.5 | 275 |
| L3 | 126 | 142 | 158 | 174 | 190 | 206 | 222 | 238 | 254 |
| L4 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 |

SS5Y5-45T1U - Stations B-C₄, N₃, C₆, N₇, C₈, N₉ (18 pins)

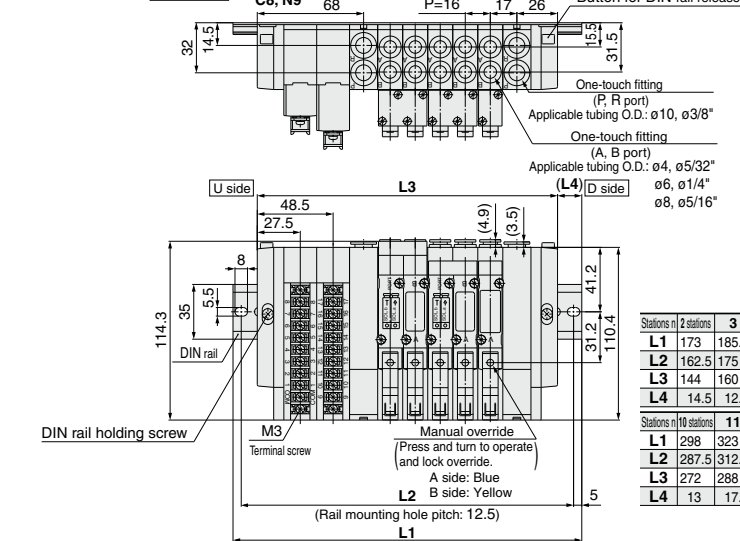


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|------------|
| L1 | 173 | 185.5 | 210.5 | 223 | 235.5 | 248 | 273 | 285.5 |
| L2 | 162.5 | 175 | 200 | 212.5 | 225 | 237.5 | 262.5 | 275 |
| L3 | 144 | 160 | 176 | 192 | 208 | 224 | 240 | 256 |
| L4 | 14.5 | 12.5 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 |

| Stations n | 10 stations | 11 | 12 | 13 | 14 | 15 | 16 | 17 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 298 | 323 | 335.5 | 348 | 360.5 | 385.5 | 398 | 410.5 |
| L2 | 287.5 | 312.5 | 325 | 337.5 | 350 | 375 | 387.5 | 400 |
| L3 | 272 | 288 | 304 | 320 | 336 | 352 | 368 | 384 |
| L4 | 13 | 17.5 | 15.5 | 14 | 12 | 16.5 | 15 | 13 |



SY5000: 18 Pins Terminal Block/Plug-in

SS5Y5-45T1D- Stations U-^{C4, N3}/_{C6, N7} (18 pins)

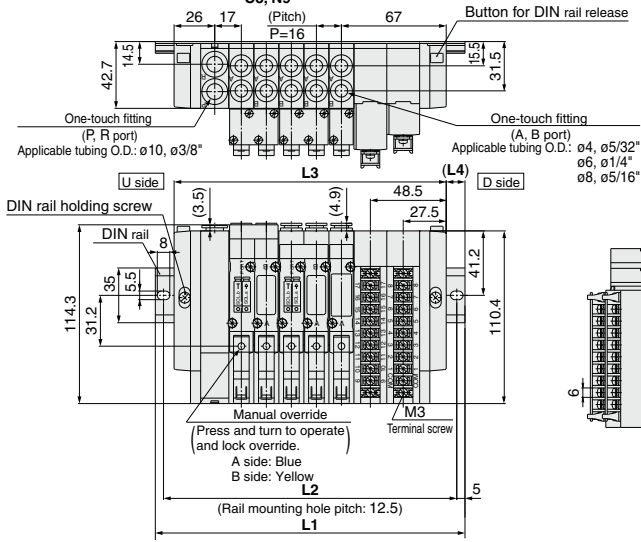


Note) The L1 to L4 dimensions of SS5Y5-45T1D- Stations D-^{C4, N3}/_{C6, N7} are identical to those of SS5Y5-45T1D- Stations U-^{C4, N3}/_{C6, N7}

- SJ
- SY
- SY
- S0700
- S0700

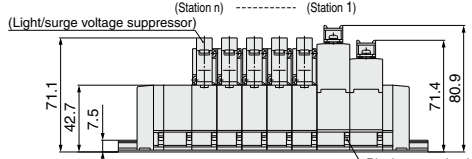

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 173 | 185.5 | 198 | 223 | 235.5 | 248 | 273 | 285.5 |
| L2 | 150 | 162.5 | 175 | 187.5 | 212.5 | 225 | 237.5 | 262.5 | 275 |
| L3 | 126 | 142 | 158 | 174 | 190 | 206 | 222 | 238 | 254 |
| L4 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 |


SS5Y5-45T1D- Stations B-^{C4, N3}/_{C6, N9} (18 pins)

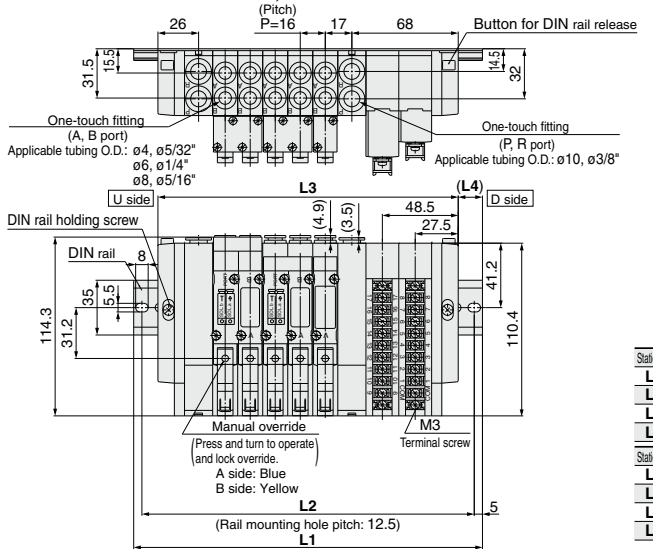

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 stations |
|------------|-------------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 185.5 | 210.5 | 223 | 235.5 | 248 | 273 | 285.5 |
| L2 | 162.5 | 175 | 200 | 212.5 | 225 | 237.5 | 262.5 | 275 |
| L3 | 144 | 160 | 176 | 192 | 208 | 224 | 240 | 256 |
| L4 | 14.5 | 12.5 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 |
| Stations n | 10 stations | 11 | 12 | 13 | 14 | 15 | 16 | 17 stations |
| L1 | 298 | 323 | 335.5 | 348 | 360.5 | 385.5 | 398 | 410.5 |
| L2 | 287.5 | 312.5 | 325 | 337.5 | 350 | 375 | 387.5 | 400 |
| L3 | 272 | 288 | 304 | 320 | 336 | 352 | 368 | 384 |
| L4 | 13 | 17.5 | 15.5 | 14 | 12 | 16.5 | 15 | 13 |

DIN Rail Manifold Exploded View

Type 45F (D-sub Connector) Manifold

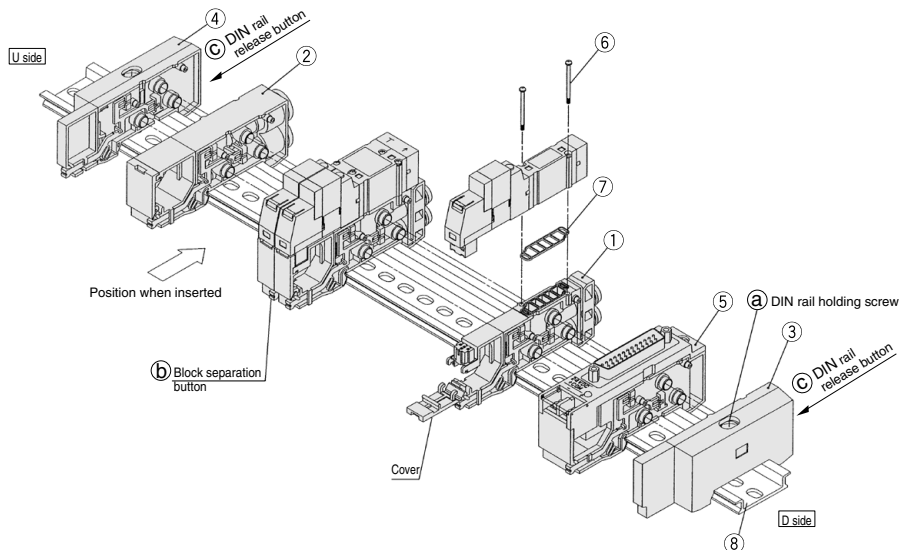

| No. | Description | Part no. | | Note |
|-----|--|---|---|--|
| | | SY3000 | SY5000 | |
| 1 | Manifold block assembly | Manifold block assembly part number differs according to an attached lead wire assembly based on the connector spec. Select an appropriate part number from the table of manifold block assembly part number shown below. (Gasket 7 is supplied as an accessory.) | | |
| 2 | SUP/EXH block assembly | (Metric size) SX3000-51-2A (Inch size) SX3000-51-16A | (Metric size) SX5000-51-2A (Inch size) SX5000-51-16A | Metric size SY3000: P, R port with One-touch fitting for ø8 Inch size SY5000: P, R port with One-touch fitting for ø $\frac{3}{16}$ " |
| 3 | End block assembly | SX3000-52-2A(-Q) | SX5000-52-2A(-Q) | For D side |
| 4 | End block assembly | SX3000-53-2A(-Q) | SX5000-53-2A(-Q) | For U side |
| 5-1 | Connector block assembly (for D-sub connector) | SX3000-64- ^{1A} _{1NA} | SX5000-64- ^{1A} _{1NA} | -1A: +COM -1NA: -COM |
| 5-2 | Connector block assembly (for 26 pins flat cable) | SX3000-64- ^{2A} _{2NA} -26 | SX5000-64- ^{2A} _{2NA} -26 | Note) For 24 VDC |
| 5-3 | Connector block assembly (for 20 pins flat cable) | SX3000-64- ^{2A} _{2NA} -20 | SX5000-64- ^{2A} _{2NA} -20 | |
| 5-4 | Connector block assembly (for 10 pins flat cable) | SX3000-64- ^{2A} _{2NA} -10 | SX5000-64- ^{2A} _{2NA} -10 | |
| 5-5 | Connector block assembly (for 2 to 8 stations (T, T) terminal block) | SX3000-64-3A | SX5000-64-3A | In common between +COM and -COM. |
| 5-6 | Connector block assembly (for 3 to 17 stations (T) terminal block) | SX3000-64-8A | SX5000-64-8A | |
| 6 | Round head combination screw | SY3000-23-4 | AC00077 | |
| | Reference screw size | (M2 x 21) | (M3 x 26) | |
| 7 | Gasket | SX3000-57-4 | SX5000-57-6 | |
| 8 | DIN rail | VZ1000-11-1-□□ | | Refer to page 568. |

Note 1) The numbers 5-1 to 4 are for 24 VDC. For 12 VDC, suffix "-12V" to the end of parts number. (Example) SX3000-64-1A-12 V

Note 2) Two manifold block assemblies are necessary for the double, 3 position (Dual body type).

| Type of manifold | Manifold block assembly part no. | Note |
|---|----------------------------------|--|
| For 45(N)F (D-sub connector) | SX ₅ 000-50-3A-□□(-Q) | □□: AB port SY3000 (metric size) (inch size) C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6 N3: With One-touch fitting for ø $\frac{3}{32}$ " N7: With One-touch fitting for ø $\frac{1}{4}$ " |
| For 45(N) _{FF} (Flat ribbon cable) | SX ₅ 000-50-5A-□□(-Q) | A, B port SY5000 (metric size) (inch size) C4: With One-touch fitting for ø4 C6: With One-touch fitting for ø6 C8: With One-touch fitting for ø8 N3: With One-touch fitting for ø $\frac{3}{32}$ " N7: With One-touch fitting for ø $\frac{1}{4}$ " N9: With One-touch fitting for ø $\frac{3}{16}$ " |
| For 45(T) (Terminal block) | SX ₅ 000-50-7A-□□(-Q) | |

Note) The lead wire assembly is supplied with the manifold block assembly.

How to Increase Manifold Bases

- 1** Loosen DIN rail holding screw (a) fixing the manifold base until it begins to turn idly. (While pressing DIN rail releasing buttons (c) at two locations, separate the manifold base from the DIN rail.)
- 2** Additional bases are to be added to the U side. Press splitting button (b) of the manifold block assembly on the U side until button (b) locks, and then separate the block assemblies.
- 3** Separate the connector block assembly in the same manner as (2), and remove the connector mounting screw shown in Fig. 1.
- 4** Loosen the valve mounting screw on the U side, remove the valve, and take out the receptacle housing. (Refer to Fig. 2.)
- 5** Insert the common wire (red) of the manifold block assembly to be added into the pin insertion section (N mark) of the receptacle housing that was taken out in (4), mount it on the manifold block, and mount the removed valve.
- 6** As shown in Fig. 3, mount the additional manifold block assembly on the DIN rail on the U side. Refer to the circuit diagram, and insert the lead wire (black) as shown in Fig. 4.
- 7** Press the blocks against each other until a click sound is produced, place the lead wire in the manifold block, and close the lid without pinching the lead wire.
- 8** While lightly holding the blocks together so that there are no gaps between them, secure them to the DIN rail by tightening the DIN rail holding screws (a). Δ (Tightening torque: 1.4 N·m)










Fig. 4 D-sub connector (45F) Flat ribbon cable (45P) Terminal block (45T)



Note)
After inserting pins, lightly pull lead wires to check that pins are locked.

Note)
Insert pins after removing the connector from the main unit. After inserting pins, lightly pull lead wires to check that the pins are locked.

Note)
Insert tab terminals completely.

- Caution**
1. Depending on the connector, there is a limit to the number of solenoids that can be used. Manifold bases that can be added cannot exceed the number of usable solenoids.
 2. The manifold block assembly mounting position for additional manifold bases is always on the U side, because wires are connected to respective connectors sequentially from the D side.
 3. When DIN rail holding screw (a) for the end block is not sufficiently tightened during reassembly, air leakage may result. Before supplying air, check that there is no gap between blocks and that the manifold block is firmly fixed to the DIN rail in order to ensure air supply without leakage.

SY
SY
S0700
S0700

How to Change Fitting Assembly


Type 45 manifold permits change in the A and B port sizes by changing the manifold block fitting assembly. After removing the valve, remove the clip with a screwdriver, etc. For mounting a new fitting assembly, insert it and then insert a clip until it will not come out of the manifold block.

Fitting Assembly Part No.

| Metric size | |
|-------------|---|
| SY3000 | One-touch fitting for ø4 VVQ1000-50A-C4 |
| | One-touch fitting for ø6 VVQ1000-50A-C6 |
| SY5000 | One-touch fitting for ø4 VVQ1000-51A-C4 |
| | One-touch fitting for ø6 VVQ1000-51A-C6 |
| | One-touch fitting for ø8 VVQ1000-51A-C8 |

| Inch size | |
|-----------|--|
| SY3000 | One-touch fitting for ø5/32 VVQ1000-50A-N3 |
| | One-touch fitting for ø1/4 VVQ1000-50A-N7 |
| SY5000 | One-touch fitting for ø5/32 VVQ1000-51A-N3 |
| | One-touch fitting for ø1/4 VVQ1000-51A-N7 |
| | One-touch fitting for ø9/16 VVQ1000-51A-N9 |

Note 1) P and R ports cannot be changed.
 Note 2) Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.
 Note 3) Purchasing order is available in units of 10 pieces.



Type **45S**

SY3000/5000 Base Mounted Manifold


Stacking Type/DIN Rail Mounted

EX122 Integrated-type (For Output) Serial Transmission System

Note) Refer to the SI unit part no. for the SI unit comparable with CE. [Option]



How to Order Manifold

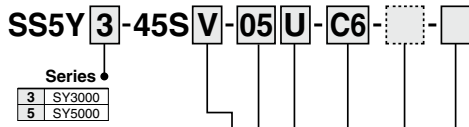

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

SI unit specifications

| Symbol | Protocol type |
|--------|---|
| 0 | Without SI unit |
| H | NKE Corp.: Fieldbus H System |
| Q | DeviceNet |
| R1 | OMRON Corp.: CompoBus/S (16 outputs) compatible |
| R2 | OMRON Corp.: CompoBus/S (8 outputs) compatible |
| V | CC-LINK |
| ZB | CompoNet™ (Positive common) |
| ZBN | CompoNet™ (Negative common) |

* Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit.

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---|
| 02 | 2 stations | Single wiring spec. (Applicable up to 16 solenoid valves.) |
| : | : | |
| 16 | 16 stations | |

* This also includes the number of blanking plate assemblies.
* Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | (Both sides) | 2 to 16 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

A, B port size

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø5/32 | SY3000 |
| N7 | One-touch fitting for ø1/4" | |
| M | Mixed | |
| N3 | One-touch fitting for ø5/32 | SY5000 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |
| M | Mixed | |

* In the case of mixed specifications, indicate separately on the manifold specification sheet.


SI Unit Part No.

| Symbol | Protocol type | SI unit No. | CE-compliant |
|--------|---|-------------|--------------|
| H | NKE Corp.: Fieldbus H System | EX122-SUH1 | — |
| Q | DeviceNet | EX122-SDN1 | ○ |
| R1 | OMRON Corp.: CompoBus/S (16 outputs) compatible | EX122-SCS1 | ○ |
| R2 | OMRON Corp.: CompoBus/S (8 outputs) compatible | EX122-SCS2 | ○ |
| V | CC-LINK | EX122-SM1 | ○ |
| ZB | CompoNet™ (Positive common) | EX122-SCM1 | ○ |
| ZBN | CompoNet™ (Negative common) | EX122-SCM3 | ○ |

Refer to page 777 and the Operation Manual for the details of EX122 Integrated-type (For Output) Serial Transmission System.
Please download the Operation Manual via our website, <http://www.smcworld.com>

How to Order Manifold Assembly (Example)


Example

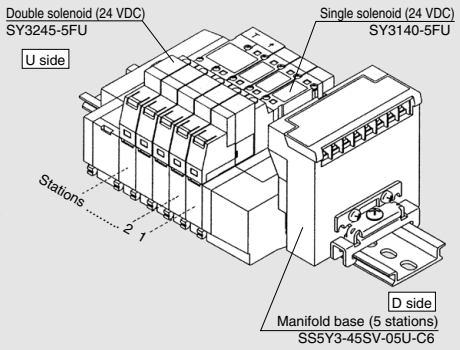

SS5Y3-45SV-05U-C6 ... 1 set (45S with SI unit 5-station manifold base part number)
 * SY3140-5FU 3 sets (Single solenoid part no.)
 * SY3245-5FU 1 set (Double solenoid part no.)

- * The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.
- * The valve arrangement is numbered as the 1st. station from D side.
- * When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.
- * SI unit is available only for the D-side mounting type.

How to Order Valve

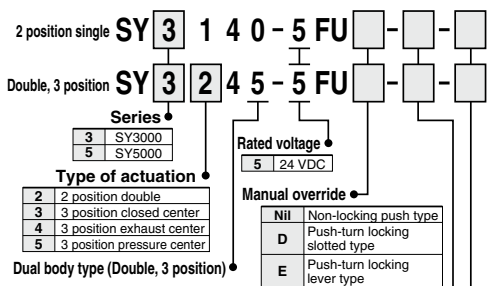

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

CE-compliant


| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 592 for details.)
- * With light/surge voltage suppressor (Non-polar type)




SY3000 Series: EX122 Integrated-type (For Output) Serial Transmission System/Plug-in

**SS5Y3-45S □ - Stations U-C4, N3
C6, N7**

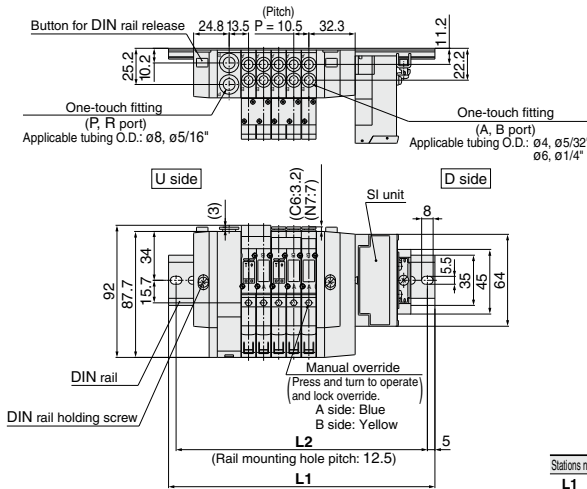


Note) The L1 to L4 dimensions of SS5Y3-45S □-

Stations U-C4, N3 C6, N7 are identical to those of SS5Y3-45S □- Stations D-C4, N3 C6, N7.



| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 |
| L2 | 137.5 | 150 | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 | 225 |
| L3 | 81 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 |
| L4 | 14.5 | 15.5 | 16.5 | 17.5 | 12 | 13 | 14 | 15 | 16 |

**SS5Y3-45S □ - Stations B-C4, N3
C6, N7**

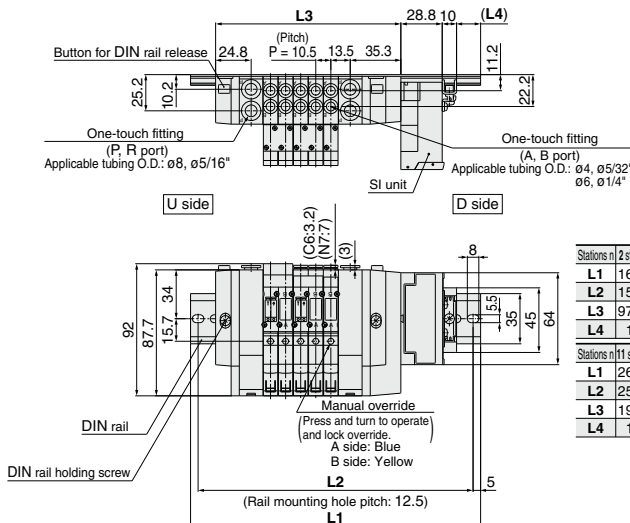


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 223 | 235.5 | 248 |
| L2 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 212.5 | 225 | 237.5 |
| L3 | 97.5 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 |
| L4 | 12.5 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 | 12 | 13 | 14 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 260.5 | 273 | 285.5 | 285.5 | 298 | 310.5 |
| L2 | 250 | 262.5 | 275 | 275 | 287.5 | 300 |
| L3 | 192 | 202.5 | 213 | 223.5 | 234 | 244.5 |
| L4 | 15 | 16 | 17 | 12 | 13 | 14 |



SY5000 Series: EX122 Integrated-type (For Output) Serial Transmission System/Plug-in

SS5Y5-45S□ - Stations U

C4, N3
C6, N7
C8, N9

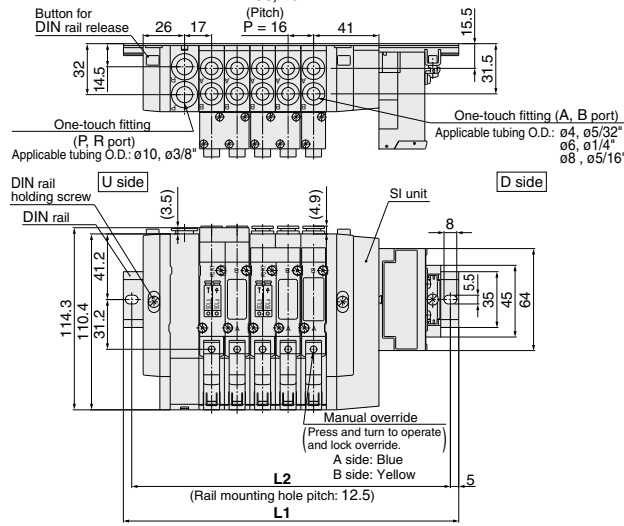


Note) The L1 to L4 dimensions of SS5Y5-45S□ - Stations U, C4, N3, C6, N7, C8, N9 are identical to those of SS5Y5-45S□ - Stations D, C4, N3, C6, N7, C8, N9

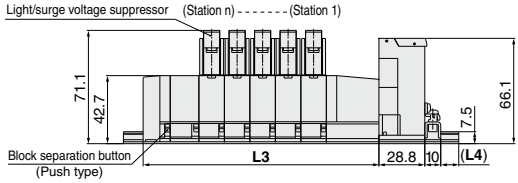

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 | 298 |
| L2 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 | 287.5 |
| L3 | 100 | 116 | 132 | 148 | 164 | 180 | 196 | 212 | 228 |
| L4 | 17.5 | 15.5 | 14 | 12 | 16.5 | 15 | 13 | 17.5 | 16 |

SS5Y5-45S□ - Stations B

C4, N3
C6, N7
C8, N9

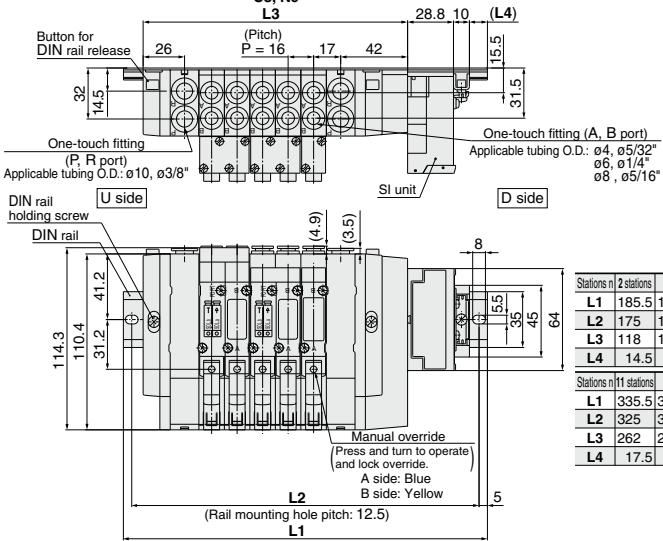

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 185.5 | 198 | 223 | 235.5 | 248 | 260.5 | 285.5 | 298 | 310.5 |
| L2 | 175 | 187.5 | 212.5 | 225 | 237.5 | 250 | 275 | 287.5 | 300 |
| L3 | 118 | 134 | 150 | 166 | 182 | 198 | 214 | 230 | 246 |
| L4 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 | 16.5 | 15 | 13 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 335.5 | 348 | 360.5 | 373 | 398 | 410.5 |
| L2 | 325 | 337.5 | 350 | 362.5 | 387.5 | 400 |
| L3 | 262 | 278 | 294 | 310 | 326 | 342 |
| L4 | 17.5 | 16 | 14 | 12.5 | 17 | 15 |

Type **45S1**

SY3000/5000 Base Mounted Manifold


Stacking Type/DIN Rail Mounted

EX 121 Separate Type (For Output) Serial Transmission System

Note) Refer to the SI unit part no. for the SI unit comparable with CE. [Option]



How to Order Manifold



SS5Y **3** - 45S1 **V D** - 05 **U** - **C4** - [] - []

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

SI unit specifications

| Symbol | Protocol type |
|------------|---|
| 0 | Without SI unit |
| H | NKE Corp.: Fieldbus H System |
| Q | DeviceNet |
| R1 | OMRON Corp.: CompoBus/S (16 outputs) compatible |
| R2 | OMRON Corp.: CompoBus/S (8 outputs) compatible |
| V | CC-LINK |
| ZB | CompoNet™ (Positive common) |
| ZBN | CompoNet™ (Negative common) |

• Even though when it is not equipped with SI unit, DIN rail length is long enough for future expectancy of mounting SI unit. When a shorter rail is required (same as type 45□), suffix "0" in the optional blank at the end of part number.

SI unit mounting position

| Symbol | Mounting position |
|----------|-------------------|
| U | U side |
| D | D side |

CE-compliant

| | |
|------------|--------------|
| Nii | — |
| Q | CE-compliant |

* Refer to the SI unit part no. for the SI unit compatible with CE.

Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)

A, B port size

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|-----------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | SY5000 |
| C4 | One-touch fitting for ø4 | |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|-----------|-------------------------------|-------------------|
| N3 | One-touch fitting for ø 5/32" | SY3000 |
| N7 | One-touch fitting for ø 1/4" | |
| M | Mixed | SY5000 |
| N3 | One-touch fitting for ø 5/32" | |
| N7 | One-touch fitting for ø 1/4" | |
| N9 | One-touch fitting for ø 9/16" | |
| M | Mixed | |

* In the case of mixed specifications, indicate separately on the manifold specification sheet.

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|----------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 16 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

Valve stations

| Symbol | Stations | Note |
|-----------|-------------|--|
| 02 | 2 stations | Single wiring spec. (Applicable up to 16 solenoid valves.) |
| : | : | |
| 16 | 16 stations | |

* This also includes the number of blanking plate assemblies.

* Two stations are necessary for the double, 3 position (Dual body type).

SI Unit Part No.

| Symbol | Protocol type | SI unit No. | CE-compliant |
|------------|---|-------------|--------------|
| H | NKE Corp.: Fieldbus H System | EX121-SUH1 | — |
| Q | DeviceNet | EX121-SDN1 | ● |
| R1 | OMRON Corp.: CompoBus/S (16 outputs) compatible | EX121-SCS1 | ● |
| R2 | OMRON Corp.: CompoBus/S (8 outputs) compatible | EX121-SCS2 | ● |
| V | CC-LINK | EX121-SMJ1 | ● |
| ZB | Compo Net™ (Positive common) | EX121-SCM1 | ● |
| ZBN | CompoNet™ (Negative common) | EX121-SCM3 | ● |

• For external pilot specifications and built-in silencer, refer to pages 616 to 620.

Refer to page 777 and the Operation Manual for the details of EX121 Separate Type (For Output) Serial Transmission System.
Please download the Operation Manual via our website, <http://www.smcworld.com>

SY

SY

SY

S0700

S0700

How to Order Valve Manifold Assembly (Example)

Example

Double solenoid (24 VDC)
SY3245-5FU

Single solenoid (24 VDC)
SY3140-5FU

U side

Stations 1 2 3 4 5

D side

Manifold base (5 stations)
SS5Y3-45S1VD-05U-C6

SS5Y3-45S1VD-05U-C6 ... 1 set (Type 45S1 with serial unit 5-station manifold base part no.)

- * SY3140-5FU..... 3 sets (Single solenoid part no.)
- * SY3245-5FU..... 1 set (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

- The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SI unit.
- When ordering double solenoid valves/3 position (Dual body type), please keep in mind that they require two manifold stations.

How to Order Valve



2 position single **SY 3 1 40-5 FU** -

Double, 3 position **SY 3 2 45-5 FU** -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Dual body type (Double, 3 position)

Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
|---|--------|

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |




CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

- * When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 592 for details.)
- * With light/surge voltage suppressor (Non-polar type)



SY3000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

SS5Y3-45S1□U- Stations D- C4, N3
C6, N7

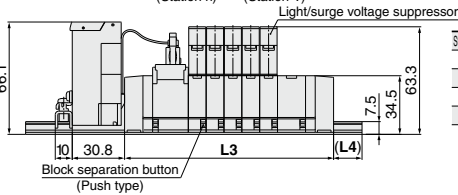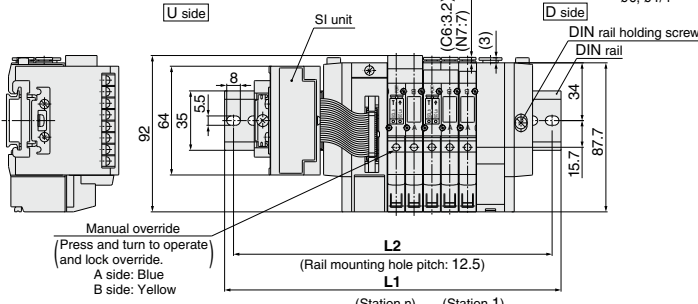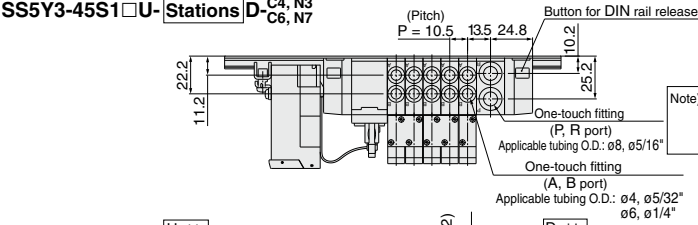

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 173 | 185.5 | 198 | 198 | 210.5 | 223 | 235.5 | 248 |
| L2 | 150 | 162.5 | 175 | 187.5 | 187.5 | 200 | 212.5 | 225 | 237.5 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 14 | 15 | 16 | 17 | 12 | 13 | 14 | 15 | 16 |

SS5Y3-45S1□U- Stations B- C4, N3
C6, N7

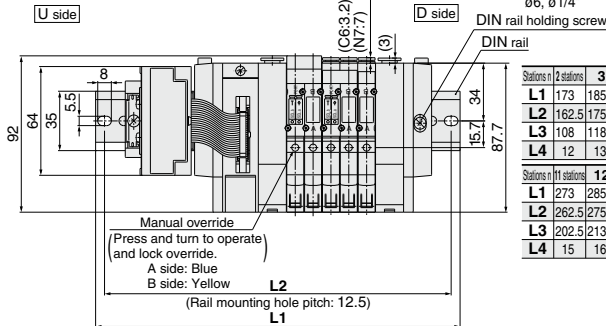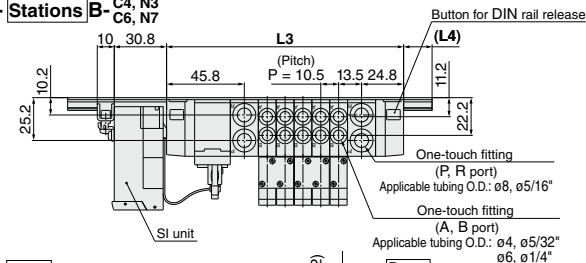


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 |
| L2 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 |
| L4 | 12 | 13 | 14 | 15 | 16 | 17 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 273 | 285.5 | 298 | 298 | 310.5 | 323 |
| L2 | 262.5 | 275 | 287.5 | 287.5 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 |
| L4 | 15 | 16 | 17 | 11.5 | 12.5 | 13.5 |




SJ
SY
SY
S0700
S0700

SY3000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

SS5Y3-45S1 □ D- Stations U- C4, N3 C6, N7


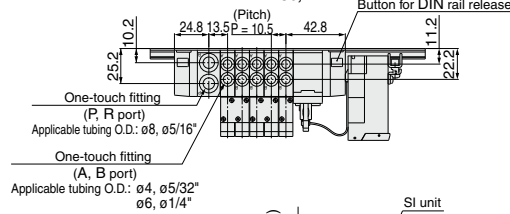


Note) The L1 to L4 dimensions of SS5Y3-45S1 □ D- Stations D- C4, N3, C6, N7 are identical to those of SS5Y3-45S1 □ D- Stations U- C4, N3, C6, N7.

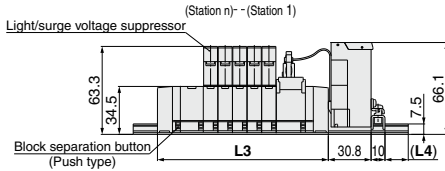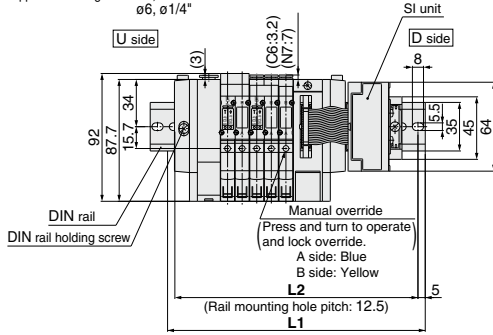

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 160.5 | 173 | 185.5 | 198 | 198 | 210.5 | 223 | 235.5 | 248 |
| L2 | 150 | 162.5 | 175 | 187.5 | 187.5 | 200 | 212.5 | 225 | 237.5 |
| L3 | 91.5 | 102 | 112.5 | 123 | 133.5 | 144 | 154.5 | 165 | 175.5 |
| L4 | 14 | 15 | 16 | 17 | 12 | 13 | 14 | 15 | 16 |

SS5Y3-45S1 □ D- Stations B- C4, N3 C6, N7

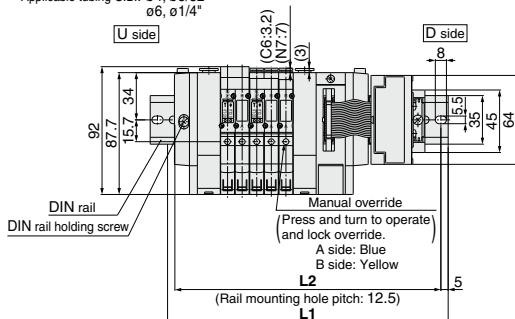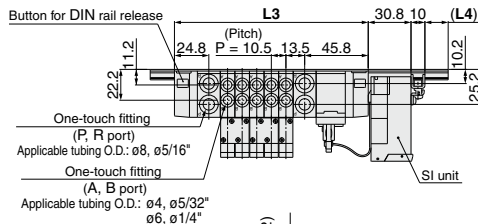


| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-----|-------|-------------|
| L1 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 260.5 |
| L2 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 225 | 237.5 | 250 |
| L3 | 108 | 118.5 | 129 | 139.5 | 150 | 160.5 | 171 | 181.5 | 192 |
| L4 | 12 | 13 | 14 | 15 | 16 | 17 | 12 | 13 | 14 |


| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 273 | 285.5 | 298 | 298 | 310.5 | 323 |
| L2 | 262.5 | 275 | 287.5 | 287.5 | 300 | 312.5 |
| L3 | 202.5 | 213 | 223.5 | 234 | 244.5 | 255 |
| L4 | 15 | 16 | 17 | 11.5 | 12.5 | 13.5 |

SY5000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

SS5Y5-45S1□U- Stations D- C4, N3
C6, N7
C8, N9

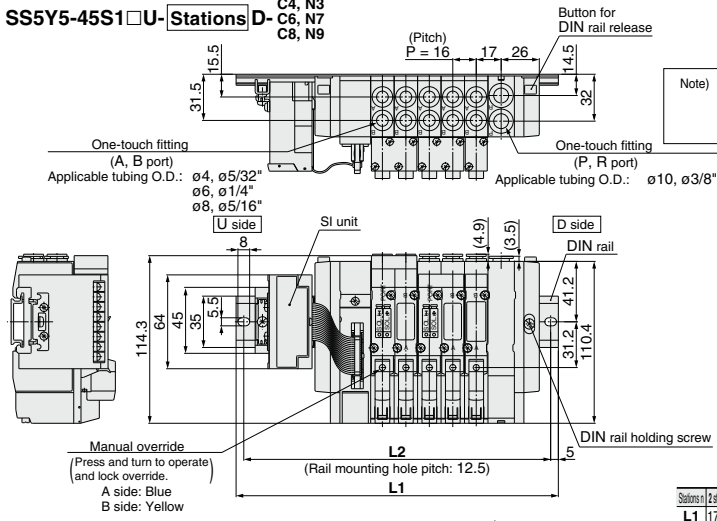


Note) The L1 to L4 dimensions of SS5Y5-45S1□U- Stations U-C4, N3, C6, N7, C8, N9 are identical to those of SS5Y5-45S1□U- Stations D-C4, N3, C6, N7, C8, N9.

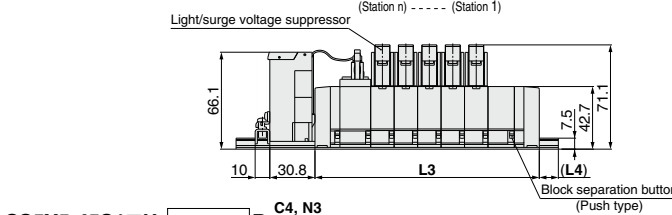

SJ
SY
SY
S0700
S0700

| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|----------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 185.5 | 210.5 | 223 | 235.5 | 260.5 | 273 | 285.5 | 298 |
| L2 | 162.5 | 175 | 200 | 212.5 | 225 | 250 | 262.5 | 275 | 287.5 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |

SS5Y5-45S1□U- Stations B- C4, N3
C6, N7
C8, N9

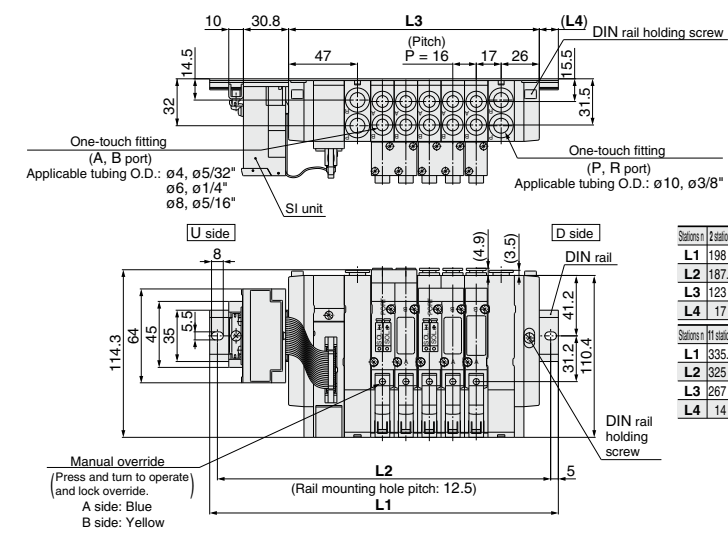


| Stations | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|----------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 198 | 210.5 | 223 | 235.5 | 260.5 | 273 | 285.5 | 310.5 | 323 |
| L2 | 187.5 | 200 | 212.5 | 225 | 250 | 262.5 | 275 | 300 | 312.5 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 |




| Stations | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|----------|-------------|-------|-------|-------|-------|-------------|
| L1 | 335.5 | 348 | 373 | 385.5 | 398 | 410.5 |
| L2 | 325 | 337.5 | 362.5 | 375 | 387.5 | 400 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 |
| L4 | 14 | 12 | 16.5 | 15 | 13 | 11.5 |

SY5000: EX121 Separate Type (For Output) Serial Transmission System/Plug-in

SS5Y5-45S1 □ D - Stations U ^{C4, N3}
_{C6, N7}
_{C8, N9}


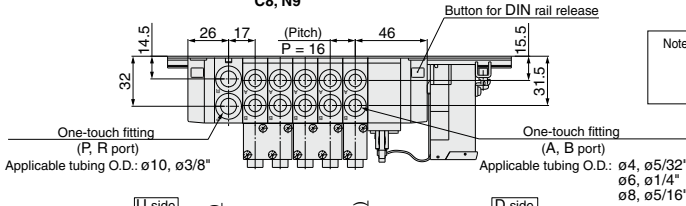


Note) The L1 to L4 dimensions of **SS5Y5-45S1 □ D - Stations D** ^{C4, N3}
_{C6, N7} are identical to those of **SS5Y5-45S1 □ D - Stations U** ^{C4, N3}
_{C6, N7}.

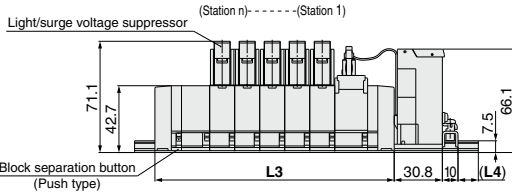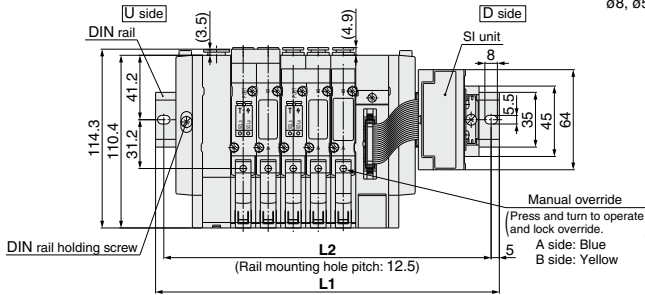

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 173 | 185.5 | 210.5 | 223 | 235.5 | 260.5 | 273 | 285.5 | 298 |
| L2 | 162.5 | 175 | 200 | 212.5 | 225 | 250 | 262.5 | 275 | 287.5 |
| L3 | 105 | 121 | 137 | 153 | 169 | 185 | 201 | 217 | 233 |
| L4 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 | 14 | 12 |

SS5Y5-45S1 □ D - Stations B ^{C4, N3}
_{C6, N7}
_{C8, N9}

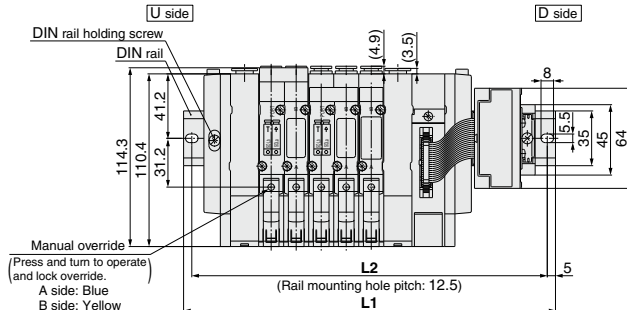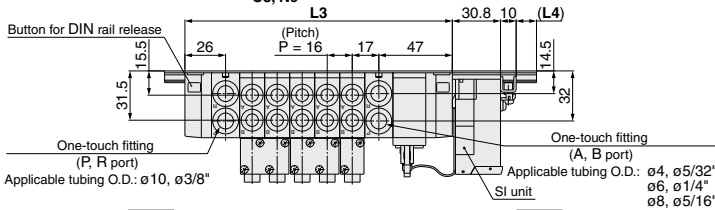

| Stations n | 2 stations | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 stations |
|------------|------------|-------|-------|-------|-------|-------|-------|-------|-------------|
| L1 | 198 | 210.5 | 223 | 235.5 | 260.5 | 273 | 285.5 | 310.5 | 323 |
| L2 | 187.5 | 200 | 212.5 | 225 | 250 | 262.5 | 275 | 300 | 312.5 |
| L3 | 123 | 139 | 155 | 171 | 187 | 203 | 219 | 235 | 251 |
| L4 | 17 | 15.5 | 13.5 | 12 | 16.5 | 14.5 | 13 | 17.5 | 15.5 |

| Stations n | 11 stations | 12 | 13 | 14 | 15 | 16 stations |
|------------|-------------|-------|-------|-------|-------|-------------|
| L1 | 335.5 | 348 | 373 | 385.5 | 398 | 410.5 |
| L2 | 325 | 337.5 | 362.5 | 375 | 387.5 | 400 |
| L3 | 267 | 283 | 299 | 315 | 331 | 347 |
| L4 | 14 | 12 | 16.5 | 15 | 13 | 11.5 |

| |
|-----------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

EX510 Gateway-type Serial Transmission System Base Mounted Manifold/Stacking Type/Plug-in Type



Type **45S6B**

SY3000/5000 Series

How to Order Manifold

SS5Y 3 - 45S6B - U - 02 U - C4 -

Manifold series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

SI unit

| | |
|-----|--------------------|
| NII | NPN output (+COM.) |
| N | PNP output (-COM.) |

SI unit mounting position

| | |
|---|--------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|------------------------------------|
| 02 | 2 stations | Compatible with 16 solenoid valves |
| ⋮ | ⋮ | |
| 16 | 16 stations | |


*The number of the blanking plate assembly is also included.

SI unit part no.

| Symbol | SI unit specifications | SI unit part no. | Page |
|--------|------------------------|------------------|-------|
| NII | NPN output (+COM.) | EX510-S002A | P.897 |
| N | PNP output (-COM.) | EX510-S102A | |

How to Order Manifold Assembly (Example)

Example

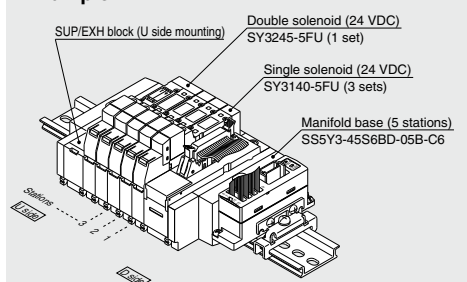

SS5Y3-45S6BD-05U-C6...1 set (45S6B type 5-station manifold part no.)
 *SY3140-5FU.....3 sets (Single solenoid part no.)
 *SY3245-5FU.....1 set (Double solenoid part no.)

*The asterisk denotes the symbol for assembly. Prefix to the part no. of the solenoid valve, etc.

- They will be assembled in the order listed starting at the first station at the D side whether the connector box is located at either end.
- When ordering double solenoid valves(3 position (dual body type), please keep in mind that they require two manifold stations.

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Option

When a DIN rail that is longer than the specified stations is desired, specify the required station number. (Max. 20 stations)

A, B port size

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------------|-------------------|
| C4 | One-touch fitting for $\phi 4$ | SY3000 |
| C6 | One-touch fitting for $\phi 6$ | |
| M | Mixed | SY5000 |
| C4 | One-touch fitting for $\phi 4$ | |
| C6 | One-touch fitting for $\phi 6$ | |
| C8 | One-touch fitting for $\phi 8$ | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|-------------------------------------|-------------------|
| N3 | One-touch fitting for $\phi 5/32''$ | SY3000 |
| N7 | One-touch fitting for $\phi 1/4''$ | |
| M | Mixed | SY5000 |
| N3 | One-touch fitting for $\phi 5/32''$ | |
| N7 | One-touch fitting for $\phi 1/4''$ | |
| N9 | One-touch fitting for $\phi 5/16''$ | |
| M | Mixed | |

* For the mixed specification, indicate separately on a manifold specification sheet.

Pilot specifications

| | |
|-----|----------------------------------|
| NII | Internal pilot |
| S | Internal pilot/built-in silencer |
| R | External pilot |
| RS | External pilot/built-in silencer |

SUP/EXH block assembly mounting position


| | | |
|---|-------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | |
| B | Both sides | 2 to 16 stations |
| M | Special specifications* | |

*For the special specifications, indicate separately on a manifold specification sheet.

Refer to page 878 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download the Operation Manual via our website, <http://www.smcworld.com>



How to Order Valves

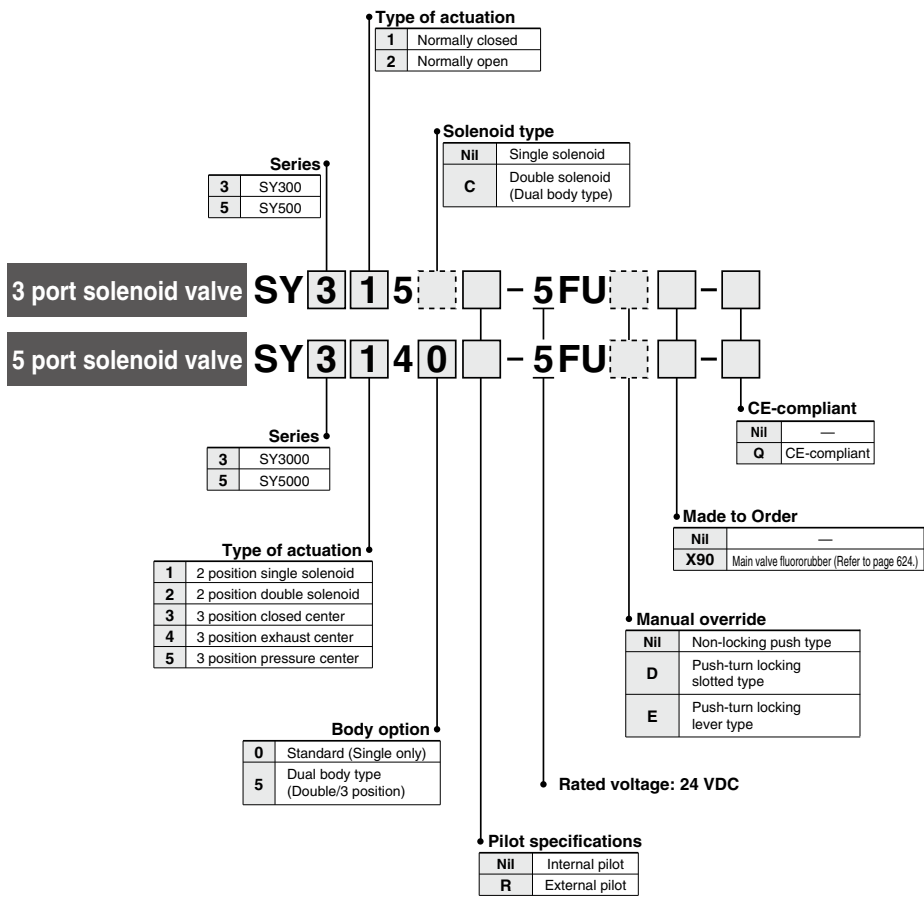





| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

* When ordering plug-in type solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to page 592 for details.)
 * With light/surge voltage suppressor (Non-polar type)

Type **45S6B** *SY3000/5000 Series*

Dimensions

SS5Y3-45S6B □ **D- Stations** U- ^{C4, N3} _{C6, N7}

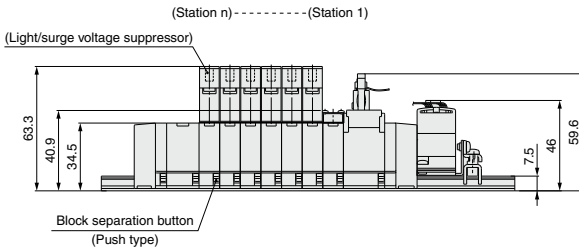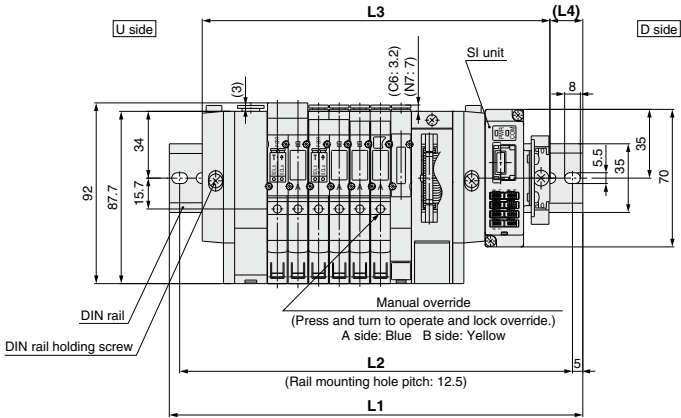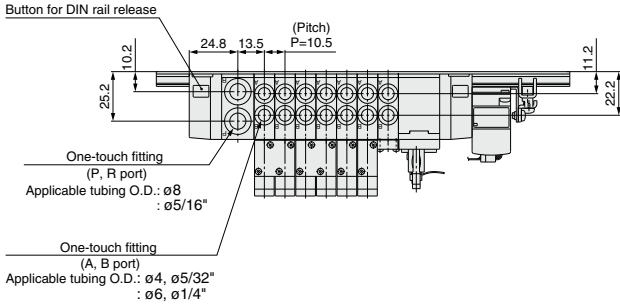




L: Dimensions

n: Stations

| L \ n | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 223 | 235.5 |
| L2 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 212.5 | 225 |
| L3 | 124.5 | 135 | 145.5 | 156 | 166.5 | 177 | 187.5 | 198 | 208.5 |
| L4 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 12.5 | 13.5 |

Dimensions

SS5Y3-45S6B U- Stations B^{C4, N3}
C6, N7

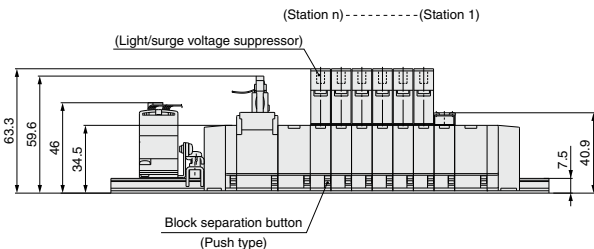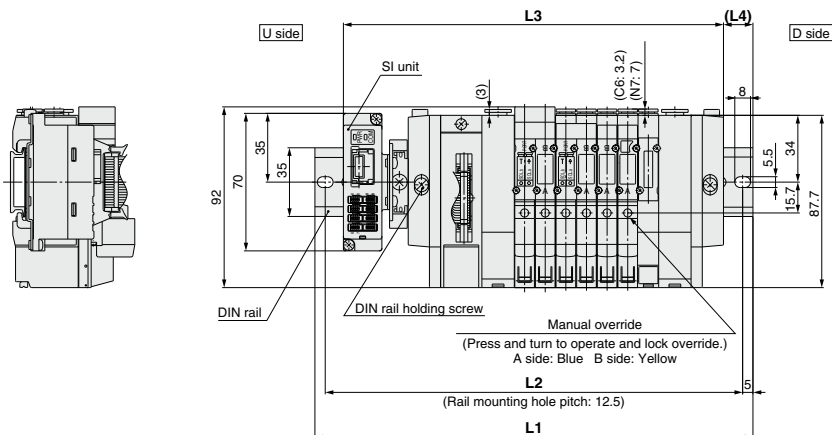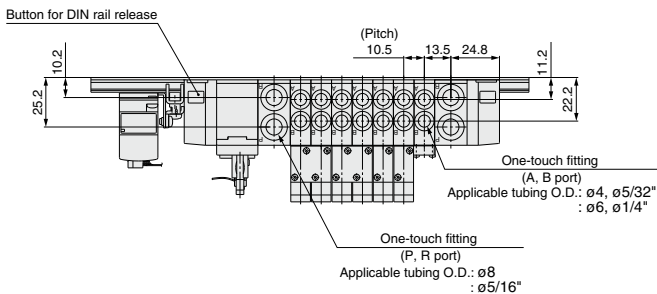

L: Dimensions

n: Stations





| L \ n | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 173 | 185.5 | 198 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 273 | 285.5 | 298 | 310.5 | 323 |
| L2 | 162.5 | 175 | 187.5 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 262.5 | 275 | 287.5 | 300 | 312.5 |
| L3 | 141 | 151.5 | 162 | 172.5 | 183 | 193.5 | 204 | 214.5 | 225 | 235.5 | 246 | 256.5 | 267 | 277.5 | 288 |
| L4 | 16 | 17 | 18 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 13.5 | 14.5 | 15.5 | 16.5 | 17.5 |

SJ
SY
SY
S0700
S0700

Type **45S6B** **SY3000/5000 Series**

Dimensions

SS5Y5-45S6B □ **D** Stations **U** C4, N3
C6, N7
C8, N9

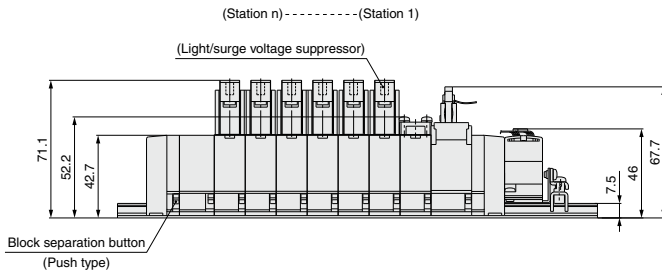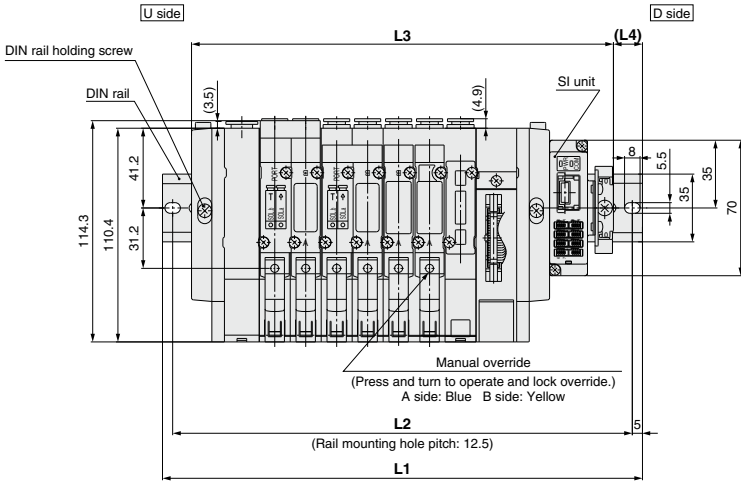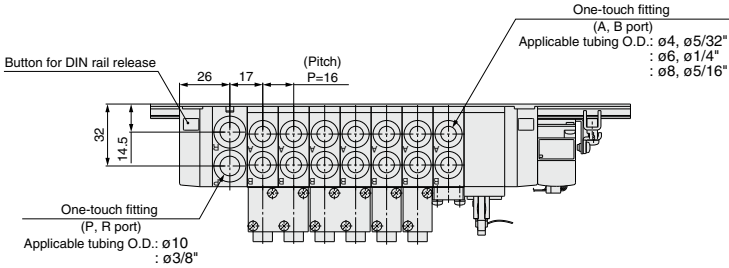


L: Dimensions

n: Stations

| L \ n | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 173 | 185.5 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 | 298 |
| L2 | 162.5 | 175 | 187.5 | 200 | 225 | 237.5 | 250 | 275 | 287.5 |
| L3 | 138 | 154 | 170 | 186 | 202 | 218 | 234 | 250 | 266 |
| L4 | 17.5 | 16 | 14 | 12.5 | 17 | 15 | 13.5 | 18 | 16 |

Manifold Option

■ Blanking plate assembly



| Series | Assembly part no. |
|---------------|-------------------|
| SY3000 | SX3000-75-2A(-Q) |
| SY5000 | SX5000-76-6A(-Q) |

Note) When mounting blanking plate, be sure to mount a short cap.

- Two stations are necessary for the double, 3 position (Dual body type).

■ SUP blocking disk

By installing a SUP blocking disk in the pressure supply passage of a manifold valve, it is possible to supply two or more different high and low pressures to one manifold.



| Series | Part no. |
|---------------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

■ EXH blocking disk

By installing an EXH blocking disk in the exhaust passage of a manifold valve, it is possible to divide the valve's exhaust so that it does not affect another valve. (Two blocking disks are needed to divide both exhausts.)




| Series | Part no. |
|---------------|--------------|
| SY3000 | SX3000-77-1A |
| SY5000 | SX5000-77-1A |

■ Label for block disk

The labels shown below are used on manifold stations containing SUP/EXH block disk(s) to show their location. (3 pcs. each)
VZ3000-123-1A (In common with SY3000, 5000)


Label for SUP block disk Label for EXH block disk Label for SUP/EXH block disk



Note) When a block disk is concurrently ordered by specifying on the manifold specification sheet, etc., a label will be stuck on the position where block disk is mounted.

■ Silencer with One-touch fitting


The silencer plugs directly into the One-touch fittings of the manifold.



| Series | Model | Effective area mm ² | A | B | C |
|-------------------------|----------|--------------------------------|-------|------|------|
| For SY3000 (ø8) | AN15-C08 | 20 | ø13 | 20 | 45 |
| For SY5000 (ø10) | AN20-C10 | 30 | ø16.5 | 30.5 | 57.5 |

■ Plug

These are inserted in unused cylinder ports and SUP, EXH ports. Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ϕD | Model | A | L | D |
|-----------------------------------|----------------|------|------|-----|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |
| 1/8" | KQ2P-01 | 16 | 31.5 | 5 |
| 5/32" | KQ2P-03 | 16 | 32 | 6 |
| 1/4" | KQ2P-07 | 18 | 35 | 8.5 |
| 5/16" | KQ2P-09 | 20.5 | 39 | 10 |

⚠ Caution


Mounting screw tightening torques

M2: 0.16 N-m


M3: 0.8 N-m

M4: 1.4 N-m

■ Individual EXH spacer assembly



■ Individual SUP spacer assembly



| Series | Assembly part no. | Port no. | t |
|---------------|-------------------|----------|----|
| SY3000 | SY3000-39-3A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-39-17A(-Q) | 1/8 | 15 |

Note) Please be careful because the dual body type (double solenoid, 3-position) requires two pieces. In this case, the exhaust is performed in the direction of the arrow mark indicated on the valve surface.

| Series | Assembly part no. | Port no. | t |
|---------------|-------------------|----------|----|
| SY3000 | SY3000-38-3A(-Q) | M5 x 0.8 | 11 |
| SY5000 | SY5000-38-17A(-Q) | 1/8 | 15 |

Note) Please be careful because the dual body type (double solenoid, 3-position) requires two pieces. In this case, both supply ports require the piping.

3 Port Valve Mixed Mounting Type on 5 Port Valve Manifold **SY300/500 Series**

3 port valve can be mounted on manifold for 5 port valve.



Single Unit

Brackets and sub-plates are the same as the SY3000/5000 series.


Applications

Possible to be mounted on all kinds of manifolds for the SY3000/5000 series.

Refer to "How to Order Manifold" for the details.

How to Order Manifold Assembly (Example)

Example

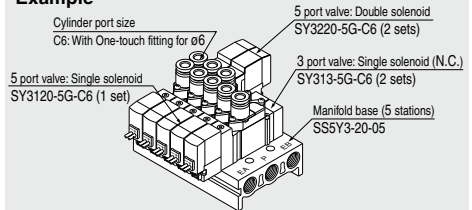

- SS5Y3-20-05 1 set (Type 20, 5-station manifold base part no.)
 * SY313-5G-C6 ... 2 sets (3 port valve, type NC part no.)
 * SY3120-5G-C6 ... 1 set (5 port valve, single solenoid part no.)
 * SY3220-5G-C6 ... 2 sets (5 port valve, double solenoid part no.)

The asterisk denotes the symbol for assembly.
 Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

Specifications

Dimensions, specifications, solenoid specifications, response time and effective area are the same as 5 port valve.



Body Ported/How to Order Valve

Note) AC-type models that are CE-compliant have DIN terminals only. [Option] (Details→P.632)

For single and individual wiring: For SS5Y₅³-20

SY 5 1 3 - **5 L** - **01**

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.O.) |

Solenoid type

| | |
|-----|-----------------|
| Nil | Single solenoid |
| D | Double solenoid |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| For DC | | For AC | |
|--------|--------|--------|-------------------|
| 5 | 24 VDC | 1 | 100 VAC |
| 6 | 12 VDC | 2 | 200 VAC |
| V | 6 VDC | 3 | 110 VAC [115 VAC] |
| S | 5 VDC | 4 | 220 VAC [230 VAC] |
| R | 3 VDC | | |

* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.
 * For type W□, DC voltage is only available.
 Note) AC-type models that are CE-compliant have DIN terminals only.

Electrical entry

| 24, 12, 6, 5, 3 VDC 100, 110, 200, 220 VAC | | | 24, 12 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 6, 5, 3 VDC |
|---|--|--|---|---|
| Grommet | L plug connector | M plug connector | DIN terminal | M8 connector |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | (SY500 only) D: With connector DO: Without connector Y: With connector YO: Without connector | WO: Without connect or cable W□: With connect or cable |
| H: Lead wire length 600 mm | LN: Without lead wire LO: Without connector | MN: Without lead wire MO: Without connector | | |
| CE-compliant | DC | | | |
| | ● | ● | ● | ● |
| | — | — | — | — |

- * LN, MN type: with 2 sockets.
- * Refer to page 639 for DIN terminal type of the SY3000 series.
- * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.
- * For connector cable of M8 connector, refer to page 641.
- * M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.
- * Refer to page 638 for the lead wire length of L and M plug connectors.
- * Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

Made to Order

| | |
|-----|---|
| Nil | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluororubber (Refer to page 624.) |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Bracket

| | |
|-----|---|
| Nil | Without bracket |
| F1 | With foot bracket (Single solenoid type only) |
| F2 | With side bracket |

* Brackets are the same as the SY3000/5000 series.
 * For bracket pin number, refer to page 407.

A port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY300 |
| 01 | 1/8 | SY500 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY300 |
| C6 | One-touch fitting for ø6 | |
| C4 | One-touch fitting for ø4 | SY500 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø9/32 | SY300 |
| N7 | One-touch fitting for ø1/4" | |
| N3 | One-touch fitting for ø9/32 | SY500 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø5/16" | |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.


Electrical entry for D, Y (SY500 only)

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |

* DOZ and YOZ are not available.
 * For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.

Gasket assembly part no.



| Series | Gasket assembly part no. |
|--------|--------------------------|
| SY300 | SY3000-GS-1 |
| SY500 | SY5000-GS-1 |

Note) The gasket assembly includes 10 sets of mounting screws and a gasket.

SY300/500 Series

Note) CE-compliant:
For DC only.



Body Ported/How to Order Valve

Flat ribbon cable

EX510 Gateway-type serial transmission system:

SS5Y₅³-20P/20SA

Coil specifications

| | |
|-----|---------------------------|
| Nil | Standard |
| T | With power saving circuit |

Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Light/Surge voltage suppressor

| | |
|---|--|
| Z | With light/surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

Note) Z: Positive common specifications only.
* Power saving circuit is only available in the "Z" type.

A port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY300 |
| 01 | 1/8" | SY500 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY300 |
| C6 | One-touch fitting for ø6 | SY300 |
| C6 | One-touch fitting for ø6 | SY500 |
| C8 | One-touch fitting for ø8 | SY500 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø5/32" | SY300 |
| N7 | One-touch fitting for ø1/4" | SY300 |
| N7 | One-touch fitting for ø1/4" | SY500 |
| N9 | One-touch fitting for ø5/16" | SY500 |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) CE-compliant:
For DC only.

20P/20SA
For DC



20P
For AC



Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

Rated voltage

| | |
|---|-------------------|
| 1 | 100 VAC |
| 3 | 110 VAC [115 VAC] |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

Made to Order

| | |
|-----|---|
| Nil | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluororubber (Refer to page 624.) |

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.O.) |

Solenoid type

| | |
|-----|-----------------|
| Nil | Single solenoid |
| D | Double solenoid |

Base Mounted/How to Order Valve

For single and individual wiring: ForSS5Y₅³-41/42/45

SY 5 1 5 [] [] [] [] [] [] - 5 L [] [] [] [] [] [] [] [] [] [] [] []

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.O.) |

Solenoid type

| | |
|-----|-----------------|
| Nil | Single solenoid |
| D | Double solenoid |

Pilot type

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

* External pilot is not available for Type 41 manifold.

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| For DC | AC | |
|--------|----|-------------------|
| 5 | 1 | 100 VAC |
| 6 | 2 | 200 VAC |
| V | 3 | 110 VAC [115 VAC] |
| S | 4 | 220 VAC [230 VAC] |
| R | | |

* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.

* For type W□, DC voltage is only available. Note) AC-type models that are CE-compliant have DIN terminals only.

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Port size

| Symbol | Applicable series |
|--------|--------------------------|
| Nil | Without sub-plate |
| 01 | With 1/8 sub-plate SY300 |
| 02 | With 1/4 sub-plate SY500 |

* Sub-plates are the same as the SY3000/5000 series.
* For sub-plate pin number, refer to page 423.

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y (SY500 only)

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Tread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Note) With sub-plate only

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Electrical entry

| | 24, 12, 6, 5, 3 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 6, 5, 3 VDC |
|---------------------------------|---|--------------------------------------|---------------------------|
| G: Grommet | L: L plug connector | M: M plug connector | DIN terminal |
| H: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | (SY500 only) |
| H: Lead wire length 600 mm | LN: Without lead wire | MN: Without lead wire | DO: Without connector |
| | LO: Without connector | MO: Without connector | Y: With connector |
| | | | YO: Without connector |
| W: Without connector cable | | | |
| WC: Without connector cable | | | |
| WC: With connector cable (Note) | | | |
| CE-compliant | DC AC | — | — |

* LN, MN type: with 2 sockets.

* Refer to page 639 for DIN terminal type of the SY300 series.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.

* Refer to page 641 for connector cable of M8 connector.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.




Base Mounted/How to Order Valve

Note) CE-compliant:
For DC only.


[Option]

Flat ribbon cable:
Connector box type: For SS5Y³-41P/42P/45-A

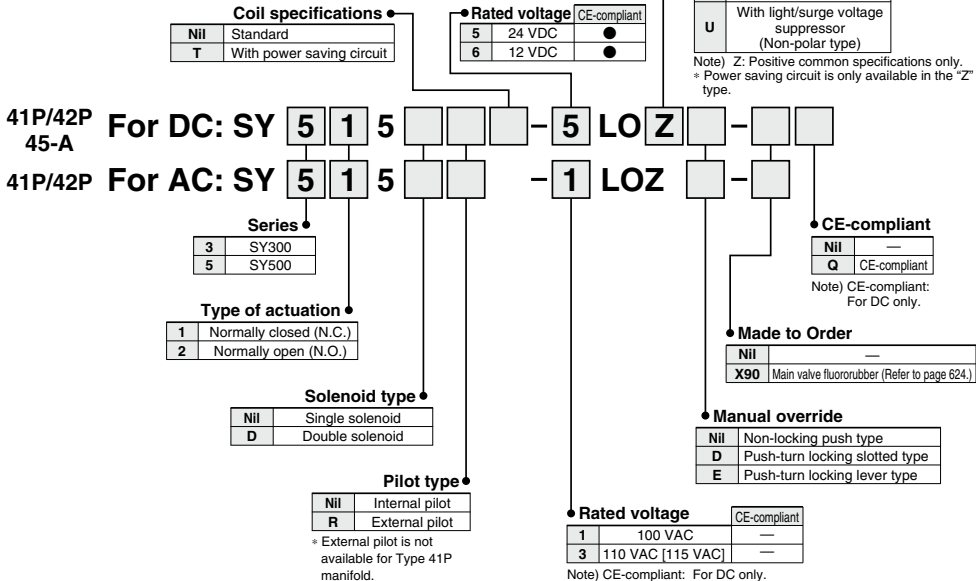





| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Plug-in: For SS5Y³-45□

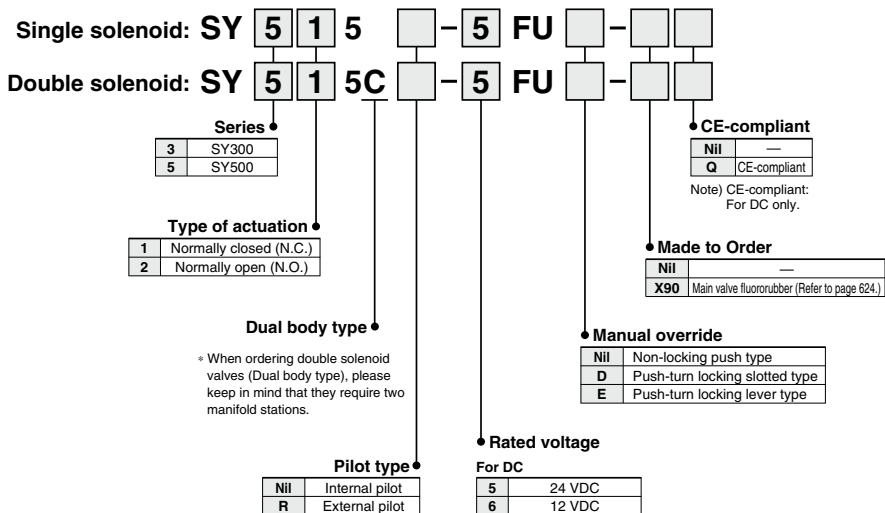

SY300/500 Series

Construction: Body Ported

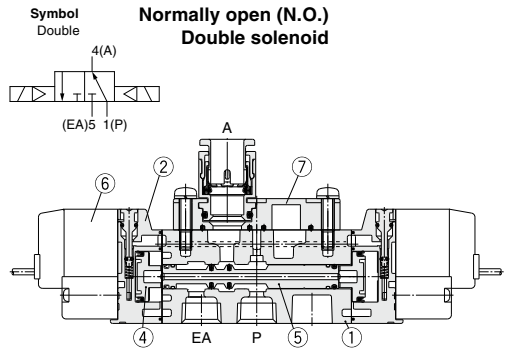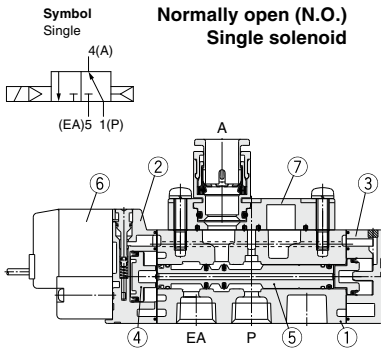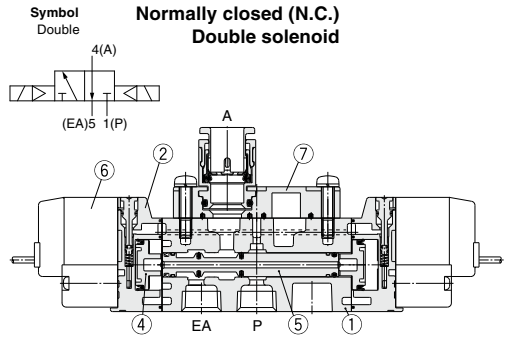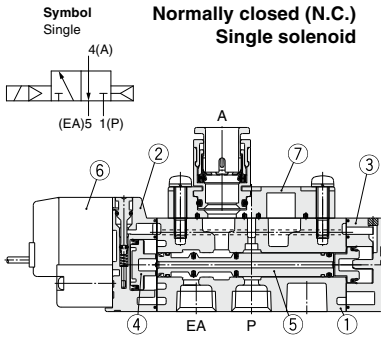


Component Parts

| No. | Description | Material | Note |
|-----|----------------------|--|-------|
| 1 | Body | Aluminum die-casted (SY300); Zinc die-casted | White |
| 2 | Adapter plate | Resin | White |
| 3 | End plate | Resin | White |
| 4 | Piston | Resin | - |
| 5 | Spool valve assembly | Aluminum, H-NBR | - |

Replacement Parts

| No. | Description | No. |
|-----|------------------------|---|
| 6 | Pilot valve assembly | Refer to "How to Order Pilot Valve Assembly" on page 629. |
| 7 | M5 port block assembly | Refer to "How to Order Port Block Assembly" below. |

How to Order M5 Port Block Assembly

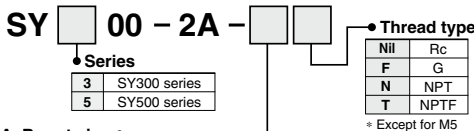

A, B port size

Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY300 |
| O1 | 1/6 | SY500 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY300 |
| C6 | One-touch fitting for ø6 | |
| C4 | One-touch fitting for ø4 | SY500 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |

One-touch fitting (Inch size)


| Symbol | Port size | Applicable series |
|--------|-----------------------------|-------------------|
| N3 | One-touch fitting for ø3/32 | SY300 |
| N7 | One-touch fitting for ø1/4 | |
| N3 | One-touch fitting for ø5/32 | SY500 |
| N7 | One-touch fitting for ø1/4 | |
| N9 | One-touch fitting for ø9/16 | |



Caution

Mounting screw tightening torques

SY300 (M2) : 0.12 N·m
SY500 (M3) : 0.6 N·m



* Only replacement of the fittings assembly is possible.


Metric size

| | | |
|-------|--------------------------|----------------|
| SY300 | One-touch fitting for ø4 | VVQ1000-50A-C4 |
| | One-touch fitting for ø6 | VVQ1000-50A-C6 |
| SY500 | One-touch fitting for ø4 | VVQ1000-51A-C4 |
| | One-touch fitting for ø6 | VVQ1000-51A-C6 |
| | One-touch fitting for ø8 | VVQ1000-51A-C8 |


Inch size

| | | |
|-------|-----------------------------|----------------|
| SY300 | One-touch fitting for ø3/32 | VVQ1000-50A-N3 |
| | One-touch fitting for ø1/4 | VVQ1000-50A-N7 |
| SY500 | One-touch fitting for ø3/32 | VVQ1000-51A-N3 |
| | One-touch fitting for ø1/4 | VVQ1000-51A-N7 |
| | One-touch fitting for ø9/16 | VVQ1000-51A-N9 |




Construction: Base Mounted




**Normally closed (N.C.)
Single solenoid**





**Normally closed (N.C.)
Double solenoid**

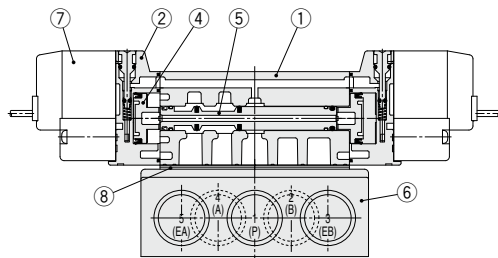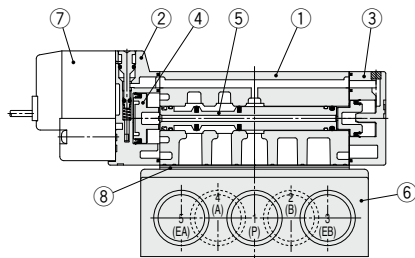

**Normally open (N.O.)
Single solenoid**



**Normally open (N.O.)
Double solenoid**

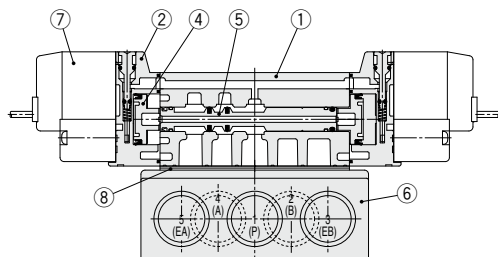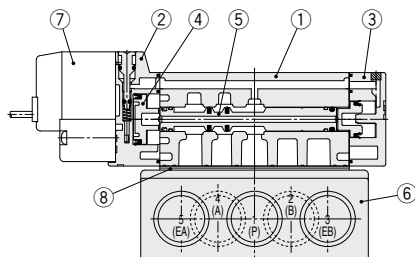

| |
|-------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

Component Parts

| No. | Description | Material | Note |
|-----|----------------------|--|-------|
| 1 | Body | Aluminum die-casted (SY3000: Zinc die-casted) | White |
| 2 | Adapter plate | Resin | White |
| 3 | End plate | Resin | White |
| 4 | Piston | Resin | — |
| 5 | Spool valve assembly | Aluminum, H-NBR | — |

Replacement Parts

| No. | Description | Part No. | | | Note |
|-----|------------------------------|---|--------------|--------------------------------------|--|
| | | SY3□40 | SY5□40 | SY7□40 | |
| 6 | Sub-plate ^(Note) | SY3000-27-1□ | SY5000-27-1□ | 1/4:SY7000-27-1□ 3/8:SY7000-27-2□ | Aluminum die-casted |
| 7 | Pilot valve assembly | Refer to "How to Order Pilot Valve Assembly" on page 629. | | | |
| 8 | Standard Gasket | SY3000-11-25 | SY5000-11-15 | SY7000-11-11 | H-NBR |
| | CE-compliant | SY3000-11-25 | SY5000-11-18 | SY7000-11-14 | |
| — | Round head combination screw | SY3000-23-4 | AC00077 | AC00296 | For valve mounting (Matt nickel plated) |
| — | Reference screw size | (M2 x 21) | (M3 x 26) | (M4 x 31) | |

* Thread type

⚠ Caution

Mounting screw tightening torques

M2: 0.16 N·m
M3: 0.8 N·m
M4: 1.4 N·m

Weight

Body ported

SY300 series

| Valve model | Type of actuation | Weight (g) | |
|-------------------|-------------------|------------|---------------------|
| | | Grommet | L, M plug connector |
| SY3□3-□□-M5 | Single | 51 | 53 |
| | Double | 68 | 74 |
| SY3□3-□□-C4 N3 | Single | 56 | 59 |
| | Double | 74 | 79 |
| SY3□3-□□-C6 N7 | Single | 54 | 57 |
| | Double | 72 | 77 |

Base mounted

SY300 series

| Valve model | Type of actuation | Note) Weight (g) | |
|-------------|-------------------|------------------|---------------------|
| | | Grommet | L, M plug connector |
| SY3□5-□□ | Single | 47(82) | 50(85) |
| | Double | 65(100) | 70(105) |

Note) The values shown in () are for values with sub-plate.

SY500 series

| Valve model | Type of actuation | Weight (g) | | |
|-------------------|-------------------|------------|---------------------|--------------|
| | | Grommet | L, M plug connector | DIN terminal |
| SY5□3-□□-01□ | Single | 69 | 72 | 93 |
| | Double | 87 | 93 | 135 |
| SY5□3-□□-C4 N3 | Single | 82 | 82 | 103 |
| | Double | 100 | 102 | 144 |
| SY5□3-□□-C6 N7 | Single | 79 | 77 | 98 |
| | Double | 97 | 98 | 140 |
| SY5□3-□□-C8 N9 | Single | 75 | 84 | 105 |
| | Double | 93 | 105 | 147 |

SY500 series

| Valve model | Type of actuation | Note) Weight (g) | | |
|-------------|-------------------|------------------|---------------------|--------------|
| | | Grommet | L, M plug connector | DIN terminal |
| SY5□5-□□ | Single | 55(118) | 58(121) | 79(142) |
| | Double | 73(136) | 78(141) | 120(183) |

Note) The values shown in () are for values with sub-plate.

SJ

SY

SY

S0700

S0700

SY3000/5000

Made to Order

External Pilot/Built-in Silencer

External pilot manifold bases for low-pressure/vacuum use are added to split type/
DIN rail manifolds. The built-in silencer has materialized a clear-cut appearance.



[Option]
Note) AC-type models that are CE-compliant have DIN terminals only.

Type 45

Individual Wiring/Connector Box Type

How to Order Manifold

Type 45

SS5Y³5-45(-A)-05U R-C6-

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Valve stations

| Symbol | Stations |
|--------|-------------|
| 02 | 2 stations |
| : | : |
| 20 | 20 stations |

* The number of blanking plate assembly is included.

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 20 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

SUP/EXH block assembly specifications

| Symbol | Specifications |
|--------|----------------------------------|
| R | External pilot specifications |
| S | Internal pilot/Built-in silencer |
| RS | External pilot/Built-in silencer |

A, B port size

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| M | Mixed | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| M | Mixed | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|--|-------------------|
| N3 | One-touch fitting for ø $\frac{5}{32}$ " | SY3000 |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | |
| M | Mixed | SY5000 |
| N3 | One-touch fitting for ø $\frac{5}{32}$ " | |
| N7 | One-touch fitting for ø $\frac{1}{4}$ " | |
| N9 | One-touch fitting for ø $\frac{9}{16}$ " | |
| M | Mixed | |

* In the case of mixed specifications, indicate separately on the manifold specification sheet.

CE-compliant


| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

How to Order Manifold Assembly (Example)

Example

Single solenoid (external pilot specifications)
SY3140R-5G (5 sets)

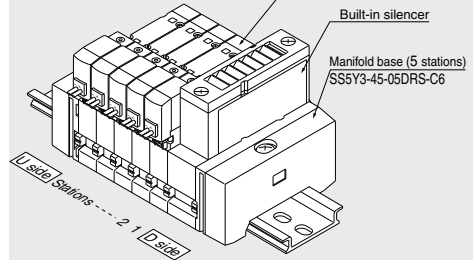

SS5Y3-45-05DRS-C6... 1 set (External pilot specification with built-in silencer part no.)

* SY3140R-5G 5 sets (Single solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.

For manifolds with SUP/EXH block assembly at each end of the manifold, external pilot ports and silencers will be also located at each end of the manifold. The SUP/EXH block assembly (SX3/5000-51-1A), for special specifications as shown on page 546, can also be mounted. Please specify the mounting position, by correctly filling in the blank space on the manifold specification sheet.



Note) AC-type models that are CE-compliant have DIN terminals only.

[Option]

How to Order Valve

SY **5** **2** **40** **□** **□** - **5** **L** **□** **□** - **□** **□**

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Pilot type

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

For AC (% Hz)

| | |
|---|-------------------|
| 1 | 100 VAC |
| 2 | 200 VAC |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

* DC specifications of Type D, Y, DO and YO is only available with 12 and 24 VDC.

* For type W□, DC voltage is only available.

* D, Y, DO and YO only available for SY5000.

Note) AC-type models that are CE-compliant have DIN terminals only.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

Made to Order

| | |
|-----|--|
| Nil | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

* For "R" and "U", DC voltage is only available.

* Power saving circuit is only available in the "Z" type.

Electrical entry for D, Y (SY5000 only)

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

| | 24, 12, 6, 5, 3 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 100, 110, 200, 220 VAC | 24, 12 VDC 6, 5, 3 VDC |
|--------------|---|--|--|
| | Grommet | L plug connector | M plug connector |
| G: | Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) |
| H: | Lead wire length 600 mm | LN: Without lead wire LO: Without connector | MN: Without lead wire MO: Without connector |
| | | | DIN terminal |
| | | | M8 connector |
| | | | (SY5000 only) |
| | | | D: With connector |
| | | | DO: Without connector |
| | | | Y: With connector |
| | | | YO: Without connector |
| | | | W□: With connector cable (Note) |
| CE-compliant | DC ● | DC ● | DC ● |
| | AC — | AC — | AC ● |

* LN, MN type: with 2 sockets.

* D, Y, DO and YO only available for SY5000.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). Refer to page 638 for details.

* Setting "5LOU" is available only for connector box type.

* Refer to page 641 for connector cable of M8 connector.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.



Type 45 SY3000/5000

The SSSY3/5-45/T1□ type plug-in terminal block manifold is to be discontinued as of December 2019. Therefore, we recommend considering the SY3000/5000/7000 plug-in connector connecting base terminal block box type manifold as a substitute. [Click here](#) for details.
However, keep in mind that there is no specification or mounting compatibility between the two products.



Plug-in

How to Order Manifold

Type 45



Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Common specifications

| | |
|-----|-----------------|
| Nil | Positive common |
| N | Negative common |

* No symbol is used for T, T1, S□ types.

Connector type

| Symbol | Mounting position |
|--------|---------------------------|
| F | D-sub connector |
| P | Flat ribbon cable 26 pins |
| PG | Flat ribbon cable 20 pins |
| PH | Flat ribbon cable 10 pins |
| T | Terminal block 9 pins |
| T1 | Terminal block 18 pins |
| S□ | Serial Transmission Type |

* For details, refer to pages from 564.

Connector mounting position

| Symbol | Mounting position |
|--------|-------------------|
| U | U side |
| D | D side |

Valve stations

| Symbol | Stations | Note |
|--------|-------------|---------------------|
| 02 | 2 stations | Single wiring spec. |
| ⋮ | ⋮ | |
| 20 | 20 stations | |

- * This also includes the number of blanking plate assemblies.
- * Depending on the connector, the number of stations is limited. Refer to page 567.
- * Two stations are necessary for the double, 3 position (Dual body type).

SUP/EXH block assembly mounting position

| Symbol | Mounting position | Stations |
|--------|------------------------|------------------|
| U | U side | 2 to 10 stations |
| D | D side | 2 to 10 stations |
| B | Both sides | 2 to 20 stations |
| M | Special specifications | |

* For special specifications, indicate separately by the manifold specification sheet.

SUP/EXH block assembly specifications

| Symbol | Specifications |
|--------|----------------------------------|
| R | External pilot specifications |
| S | Internal pilot/Built-in silencer |
| RS | External pilot/Built-in silencer |

A, B port size

| One-touch fitting (Metric size) | | One-touch fitting (Inch size) | |
|---------------------------------|--------------------------|-------------------------------|------------------------------|
| Symbol | Port size | Symbol | Port size |
| C4 | One-touch fitting for ø4 | N3 | One-touch fitting for ø5/32" |
| C6 | One-touch fitting for ø6 | N7 | One-touch fitting for ø1/4" |
| M | Mixed | M | Mixed |
| C4 | One-touch fitting for ø4 | N3 | One-touch fitting for ø5/32" |
| C6 | One-touch fitting for ø6 | N7 | One-touch fitting for ø1/4" |
| C8 | One-touch fitting for ø8 | N9 | One-touch fitting for ø3/16" |
| M | Mixed | M | Mixed |

* In the case of mixed specifications, indicate separately on the manifold specification sheet.

Voltage

| | |
|-----|--------|
| Nil | 24 VDC |
| 12V | 12 VDC |

Option


When a longer DIN rail is desired than the specified stations, specify the station number to be required. (20 stations at maximum)

* No symbol is used for T, T1, S□ types.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

How to Order Manifold Assembly (Example)

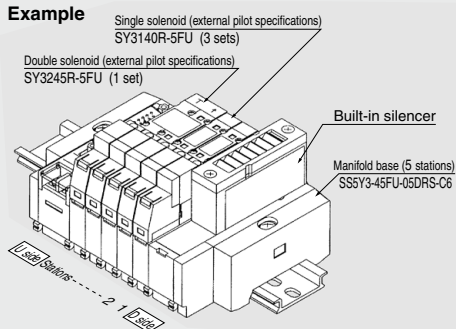

SSSY3-45FU-05DRS-C6...1 set (External pilot specification with built-in silencer part no.)

- * SY3140R-5FU.....3 sets (Single solenoid part no.)
- * SY3245R-5FU.....1 set (Double solenoid part no.)

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.
For manifolds with SUP/EXH block at each end of the manifold, external pilot ports and silencers will be also located at each end of the manifold.
The SUP/EXH block assembly (SX3/5000-51-1A), for special specifications, can also be mounted. Please specify the mounting position, by correctly filling in the blank space on the manifold specification sheet.
Two stations of the manifold base are necessary for the double, 3 position (Dual body type). Use caution when specifying the number of stations required for the manifold base.

How to Order Valve



Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Body Option

| | |
|---|-------------------------------------|
| 0 | Standard (Single only) |
| 5 | Dual body type (Double, 3 position) |

Pilot type

| | |
|-----|----------------|
| Nil | Internal pilot |
| R | External pilot |

Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

Manual override

| | |
|-----|--------------------------------|
| Nil | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

* Mark: 45T and T1 only

S□ type is available for 24 VDC only.


Made to Order

| | | |
|-----|--|--------------|
| Nil | — | CE-compliant |
| X90 | Main valve fluororubber (Refer to page 624). | Nil |
| | | Q |



External Pilot/Built-in Silencer

[]: AC

SY3000: SS5Y3-45- Stations **DRS-^{C4, N3}_{C6, N7}**

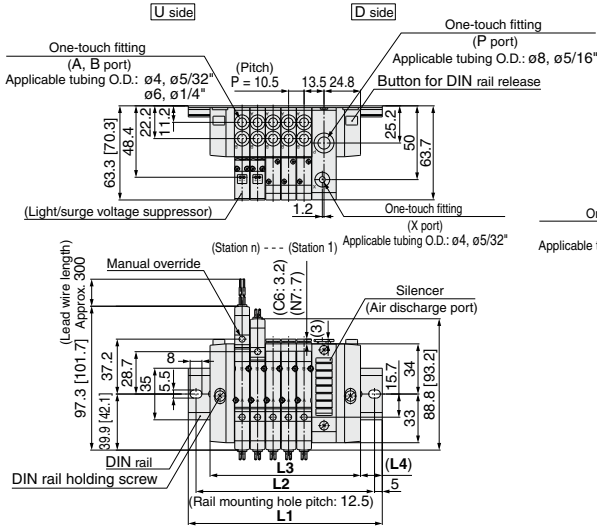


SS5Y3-45- Stations **DR-^{C4, N3}_{C6, N7}**


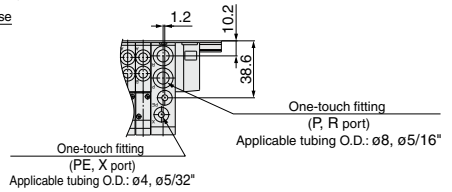


* The dimensions L1 to L4 are identical to those of **SS5Y3-45- Stations** **DR-^{C4, N3}_{C6, N7}**.

SY5000: SS5Y5-45- Stations **DRS-^{C4, N3}_{C6, N7}^{C8, N9}**

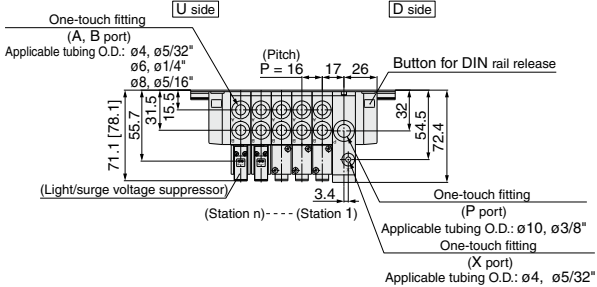

SS5Y5-45- Stations **DR-^{C4, N3}_{C6, N7}^{C8, N9}**





* The dimensions L1 to L4 are identical to those of **SS5Y3-45- Stations** **DR-^{C4, N3}_{C6, N7}^{C8, N9}**.

* The dimensions of **SS5Y3-45- Stations** **URS** are identical to those of **SS5Y3-45- Stations** **DRS**.



| |
|--------------|
| SJ |
| SY |
| SY |
| S0700 |
| S0700 |

External Pilot/Built-in Silencer



SY3000: SS5Y3-45FU - Stations DRS-C4,N3 C6,N7

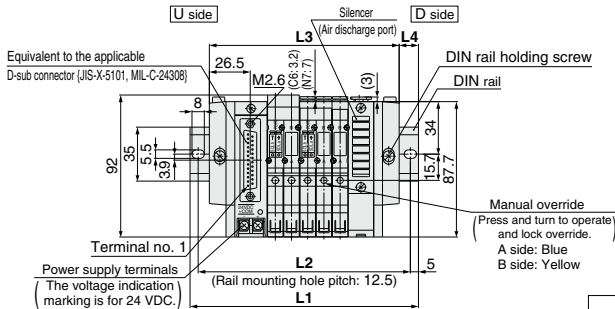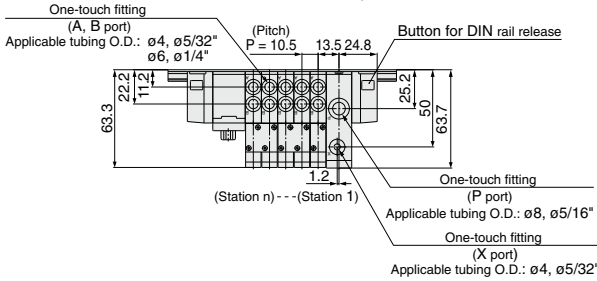

SY5000: SS5Y5-45FU - Stations DRS-C4,N3 C6,N7 C8,N9

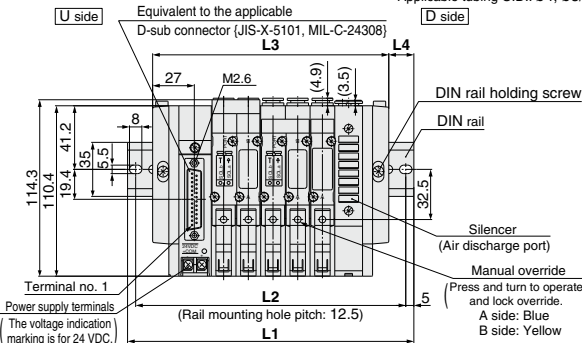
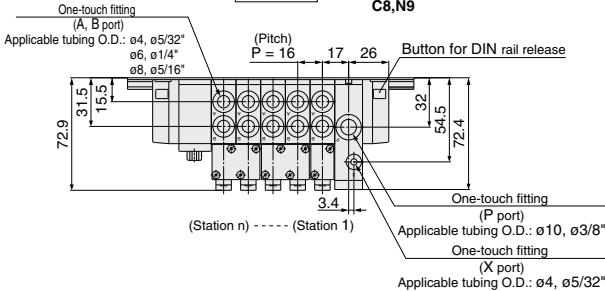


SS5Y3-45FU - Stations DR-C4,N3 C6,N7



* The dimensions L1 to L4 are identical to those of SS5Y3-45FU - Stations D-C4,N3 C6,N7.

SS5Y5-45FU - Stations DR-C4,N3 C6,N7 C8,N9



* The dimensions L1 to L4 are identical to those of SS5Y3-45FU - Stations D-C4,N3 C6,N7 C8,N9.

* The dimensions of SS5Y3-45FU - Stations URS are identical to those of SS5Y3-45FU - Stations DRS.

SY3000/5000

Made to Order

Mixed Mounting Type

Type M45



[Option]
Note) CE-compliant:
For DC only.

Non plug-in

This manifold makes it possible to mount SY3000 onto base of SY5000.

How to Order Manifold

Type M45 (Mixed mounting type)

SS5Y5-M45-05 U C86

• Mixed mounting type

• Valve stations SUP/EXH block assembly mounting position

| Symbol | Stations | Symbol/Mounting position | Stations |
|--------|-------------|--------------------------|------------------------|
| 02 | 2 stations | U | U side |
| : | : | D | D side |
| 20 | 20 stations | B | Both sides |
| | | M | Special specifications |

* The number of blanking plate assembly is included, too.

* For special specifications, indicate separately by the manifold specification sheet.

SUP/EXH block assembly specifications

| Symbol | Specifications |
|--------|--|
| NII | Standard/Internal pilot specifications |
| S | Built-in silencer |

* External pilot specification is unavailable for mixed mounting type.

• CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

• Option

When a longer DIN rail is desired than the specified stations, specify the station number to be required. (Max. 20 stations)

A, B port size

One-touch fitting (Metric size)

| Symbol | Port size |
|--------|--|
| C44 | SY5000: One-touch fitting for ø4 SY3000: One-touch fitting for ø4 |
| C46 | SY5000: One-touch fitting for ø4 SY3000: One-touch fitting for ø6 |
| C64 | SY5000: One-touch fitting for ø6 SY3000: One-touch fitting for ø4 |
| C66 | SY5000: One-touch fitting for ø6 SY3000: One-touch fitting for ø6 |
| C84 | SY5000: One-touch fitting for ø8 SY3000: One-touch fitting for ø8 |
| C86 | SY5000: One-touch fitting for ø8 SY3000: One-touch fitting for ø6 |
| M | Mixed |


* In the case of mixed specifications, indicate separately on the manifold specification sheet.

One-touch fitting (Inch size)

| Symbol | Port size |
|--------|--|
| N33 | SY5000: One-touch fitting for ø $\frac{5}{16}$ " SY3000: One-touch fitting for ø $\frac{5}{16}$ " |
| N37 | SY5000: One-touch fitting for ø $\frac{3}{8}$ " SY3000: One-touch fitting for ø $\frac{1}{4}$ " |
| N73 | SY5000: One-touch fitting for ø $\frac{1}{4}$ " SY3000: One-touch fitting for ø $\frac{3}{8}$ " |
| N77 | SY5000: One-touch fitting for ø $\frac{1}{4}$ " SY3000: One-touch fitting for ø $\frac{1}{4}$ " |
| N93 | SY5000: One-touch fitting for ø $\frac{3}{8}$ " SY3000: One-touch fitting for ø $\frac{3}{8}$ " |
| N97 | SY5000: One-touch fitting for ø $\frac{1}{2}$ " SY3000: One-touch fitting for ø $\frac{1}{4}$ " |
| M | Mixed |

How to Order Manifold Assembly (Example)

Example

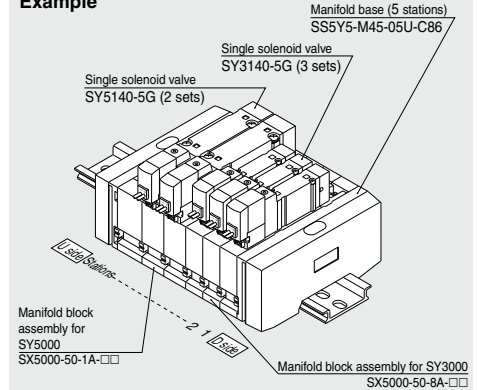

SS5Y5-M45-05U-C86 1 set (Type M45, manifold base part no.)
 * **SY3140-5G**..... 3 sets (Single solenoid part no.)
 * **SY5140-5G**..... 2 sets (Single solenoid part no.)

— The asterisk denotes the symbol for assembly.
 Prefix it to the part nos. of the solenoid valve, etc.

The valve arrangement is numbered as the 1st. station from D side regardless of the mounting position of SUP/EXH block assembly. In ordering, specify the part nos. in the order from the 1st. station on D side. Besides, when the arrangement will be complicated, fill out the manifold specification sheet to instruct us.

How to Order Valve

SY 5 2 40

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

• Coil specifications

| Symbol | Standard |
|--------|---|
| NII | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of WJ type.

Rated voltage

| For DC | CE-compliant | For AC (V/Hz) | CE-compliant |
|--------|--------------|---------------|----------------------|
| 5 | 24 VDC | 1 | 100 VAC |
| 6 | 12 VDC | 2 | 200 VAC |
| V | 6 VDC | 3 | 110 VAC [115 VAC] |
| S | 5 VDC | 4 | 220 VAC [230 VAC] |
| R | 3 VDC | | |

* For type W□, DC voltage is only available.
 Note) CE-compliant: For DC only.

* When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the integrated manifold are supplied with the solenoid valve, but the stacking type gaskets are not included. When the stacking type gaskets are required, order them separately.

• Electrical entry for G, H, L, M, W

| | |
|-----|--|
| NII | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
 * For "R" and "U", DC voltage is only available.
 * Power saving circuit is only available in the "Z" type.

• Electrical entry

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC | | | | 24, 12, 6, 5, 3 VDC |
|--|-----------------------------------|-----------------------------------|---------------------------------|---------------------|
| Grommet | L plug connector | M plug connector | M8 connector | |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | WO: Without connector cable | |
| H: Lead wire length 600 mm | LN: Without lead wire | MN: Without lead wire | W□: With connector cable (Note) | |
| | LO: Without connector | MO: Without connector | | |

* LN, MN type: with 2 sockets.

* Refer to page 641 for connector cable of M8 connector.

* M8 connector conforming to IEC60947-5-2 standard is also available. Refer to page 623 for details.

* Refer to page 638 for the lead wire length of L and M plug connectors.

* Refer to page 639 for the connector assembly with cover for L and M plug connectors.

Note) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

SJ

SY

SY


S0700

S0700

Dimensions: Mixed Mounting

[] : AC


SS5Y5-M45- Stations U

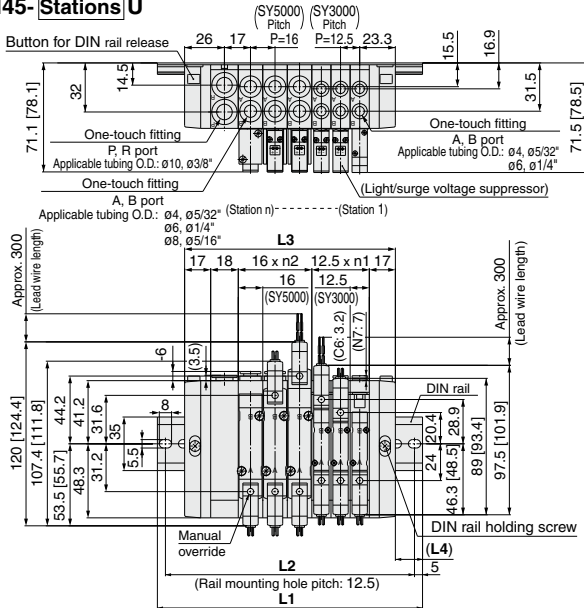


L dimension: Formulae for L1 to L4
 $L3 = 12.5 \times n1 + 16 \times n2 + 52$
 $M = \left(\frac{L3}{12.5} + 1 \right)$ Omit decimals
 $L1 = 12.5 \times M + 23$
 $L2 = L1 - 10.5$
 $L4 = (L1 - L3) / 2$

n1 = Number of SY3000
 n2 = Number of SY5000

(Note) The L1 to L4 dimensions of **SS5Y5-M45- Stations D** are identical to those of **SS5Y5-M45- Stations U**.




SS5Y5-M45- Stations B

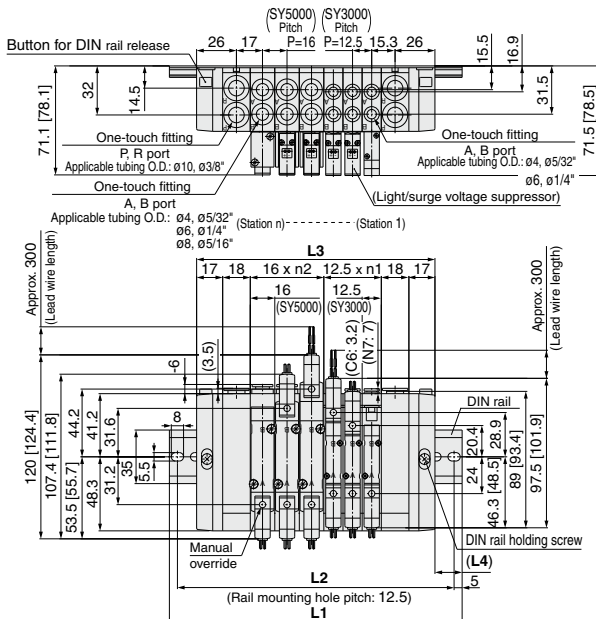

L dimension: Formulae for L1 to L4
 $L3 = 12.5 \times n1 + 16 \times n2 + 70$
 $M = \left(\frac{L3}{12.5} + 1 \right)$ Omit decimals
 $L1 = 12.5 \times M + 23$
 $L2 = L1 - 10.5$
 $L4 = (L1 - L3) / 2$

n1 = Number of SY3000
 n2 = Number of SY5000



[SY3000/5000/7000/9000/SY300/500 Series]

Made to Order

M8 Connector Conforming to IEC60947-5-2



How to Order Valve

* For details on specifications, refer to page 637.

Type of actuation

| | |
|---|--------------|
| 3 | Body ported |
| 5 | Base mounted |

Type of actuation

| | |
|---|-----------------|
| 1 | Normally closed |
| 2 | Normally open |

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

3 port valve (5 port valve mixed mounting type)

5 port valve

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

Type of actuation

| | |
|---|----------------------------|
| 1 | 2 position single |
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Body type

| | |
|---|---------------------------|
| 2 | Body ported |
| 4 | Base mounted |
| 6 | Body ported cassette type |

* The body ported cassette type is not available for the SY9000 series.

Note) When placing an order for body ported solenoid valve as a single unit, gaskets are not included. Order them separately, if necessary. (Refer to catalog on page 467 for details.)

A port size Thread piping

| Symbol | Port size | Applicable series |
|--------|--------------|-------------------|
| Nll | Base mounted | |
| M5 | M5 x 0.8 | SY300 |
| 01 | 1/8 | SY500 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY300 |
| C6 | One-touch fitting for ø6 | |
| C4 | One-touch fitting for ø4 | SY500 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|----------------------------|-------------------|
| N3 | One-touch fitting for 5/32 | SY300 |
| N7 | One-touch fitting for 1/4 | SY300 |
| N7 | One-touch fitting for 1/4 | SY500 |
| N9 | One-touch fitting for 3/16 | |

Thread type

| | |
|-----|------|
| Nll | Rc |
| F | G |
| N | NPT |
| T | NPTF |

CE-compliant

| | |
|-----|--------------|
| Nll | — |
| Q | CE-compliant |

Pilot type

| | |
|-----|----------------|
| Nll | Internal pilot |
| R* | External pilot |

* Base mounted type only.

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

Electrical entry

WAO: Without connector cable

WA□: With connector cable (Note 1)

Note 1) □: Enter a symbol for cable length. Enter referring page 642.

Light/Surge voltage suppressor

| | |
|-----|---|
| Nll | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With indicator light and surge voltage suppressor |
| R | Without surge voltage suppressor (non-polar type) |
| U | Without light/surge voltage suppressor (non-polar type) |

Manual override

| | |
|-----|--------------------------------|
| Nll | Non-locking push type |
| D | Push-turn locking slotted type |
| E | Push-turn locking lever type |

Made to Order

| | |
|-----|---|
| Nll | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluororubber (Refer to page 624.) |

* X20 for the SY9000 series is not available.
* X20 for the base mounted type is not available.

A, B port size For body ported Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |
| 02 | 1/4 | |
| 03 | 3/8 | SY9000 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | |
| C8 | One-touch fitting for ø8 | SY9000 |
| C10 | One-touch fitting for ø10 | |
| C12 | One-touch fitting for ø12 | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|-----------------------------|-------------------|
| N3 | One-touch fitting for ø5/32 | SY3000 |
| N7 | One-touch fitting for ø1/4 | |
| N3 | One-touch fitting for ø5/32 | SY5000 |
| N7 | One-touch fitting for ø1/4 | |
| N9 | One-touch fitting for ø3/16 | |
| N9 | One-touch fitting for ø3/16 | SY7000 |
| N11 | One-touch fitting for ø3/8 | |
| N9 | One-touch fitting for ø3/16 | SY9000 |
| N11 | One-touch fitting for ø3/8 | |

For Base Mounted

| Symbol | Port size | Applicable series |
|--------|-------------------|-------------------|
| Nll | Without sub-plate | SY3000 |
| 01 | With sub-plate | SY3000 |
| 02 | With sub-plate | SY5000 |
| 02 | With sub-plate | SY7000 |
| 03 | With sub-plate | SY7000 |
| 03 | With sub-plate | SY9000 |
| 04 | With sub-plate | SY9000 |

SJ
SY
SY
S0700
S0700

How to Order Pilot Valve

V111- 5 WAO □

Rated voltage

For DC

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

Light/Surge voltage suppressor

| | |
|-----|---|
| Nll | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With indicator light and surge voltage suppressor |
| R | With surge voltage suppressor (non-polar type) |
| U | Without light/surge voltage suppressor (non-polar type) |

Electrical entry

| | | |
|-----|-----------|-------------------------------|
| WAO | M8 | Without connector cable |
| WA□ | connector | With connector cable (Note 1) |

Note 1) □: Enter a symbol for cable length. Enter referring page 642.

* Since V111 is CE-compliant as standard, the suffix "Q" is not necessary.



SY3000/5000/7000/9000 Series


Made to Order

Body Ported External Pilot/Fluororubber for Main Valve



Body Ported External Pilot

Applicable solenoid valves: SY3□□□0, SY5□□□0, SY7□□□0 series



Entry is the same as standard products.

Note) Din terminal is not available for the SY3000 series.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.


Operating pressure range MPa

| | |
|--------------------------|-----------------|
| Operating pressure range | -100 kPa to 0.7 |
| Pilot pressure range | 0.25 to 0.7 |

External pilot port

| Series | Port size |
|--------|-----------|
| SY3000 | M3 x 0.5 |
| SY7000 | M5 x 0.8 |


Dimensions

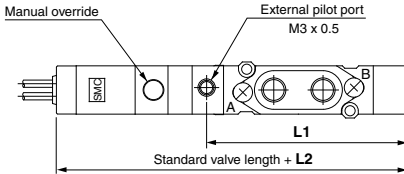

Dimensions/External Pilot Port Position

| Series | L1 dimensions | L2 dimensions |
|--------|---------------|---------------|
| SY3000 | 41.5 | 6.5 |
| SY5000 | 60.4 | 9 |
| SY7000 | 71.9 | 9 |

Symbol

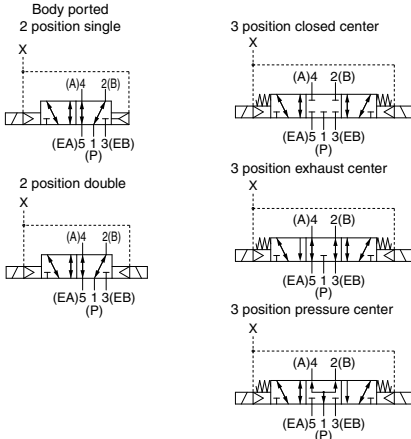


Main Valve Fluororubber Specifications

Fluororubber is used for rubber parts of the main valve to allow use in applications such as the following.

- When using a lubricant other than the recommended turbine oil, and there is a possibility of malfunction due to swelling of the spool valve seals.

Applicable solenoid valves: SY3□□□0, SY5□□□0, SY7□□□0, SY9□□□0 series



Entry is the same as standard products.

Specifications and performance are the same as standard products.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

SY5000

Made to Order


Body Ported Vacuum Release Valve with Throttle Valve



Vacuum Release Valve with Throttle Valve: SY5A2R

- Line for vacuum adsorption transfer
- Built-in throttle valve in the vacuum release valve
- Can be mounted on the SS5Y5-20-type (Individual wiring type) and SS5Y5-20P-type (Flat ribbon cable type) Manifold
- Valve effective area

Symbol



| B port Port size ^{Note 1)} | Effective area: mm ² | |
|--|---------------------------------|------|
| | EA→B ^{Note 2)} | B→EB |
| C6 | 4.4 | 6.8 |
| C8 | 4.5 | 7.0 |

Note 1) Refer to the part numbers for the port size.
Note 2) When the built-in throttle valve is fully open.

Specifications

| | | |
|-------------------------------|--|-------------------|
| Valve type | External pilot type, Dual 2 port solenoid valve | |
| Type of actuation | Normally closed (N.C. valve) | |
| Fluid | Air | |
| Operating pressure range | P (External pilot pressure) | 0.15 to 0.7 MPa |
| | EA (Vacuum release pressure) | 0 to 0.7 MPa |
| | EB (Vacuum) | -100 kPa to 0 MPa |
| Pilot valve exhaust method | Pilot valve individual exhaust | |
| Ambient and fluid temperature | -10 to 50°C (No condensation) | |


Effective Area/Weight

| B port Port size ^{Note 1)} | Effective area: mm ² | | Weight (g) |
|--|---------------------------------|------|------------|
| | EA→B ^{Note 2)} | B→EB | |
| C6 | 4.4 | 6.8 | 94 |
| C8 | 4.5 | 7.0 | 88 |

Note 1) Refer to the part numbers for the port size.
Note 2) When the built-in throttle valve is fully open.


How to Order

Single unit: External pilot type dual 2 port solenoid valve

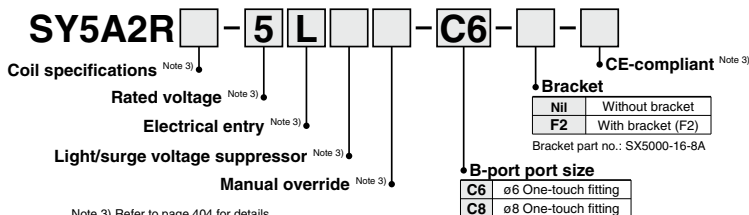

Manifold: Body ported bar stock (20/20P/20SA type)

* Specify the part numbers for valves and options together beneath the manifold base part number in order starting from the first station.

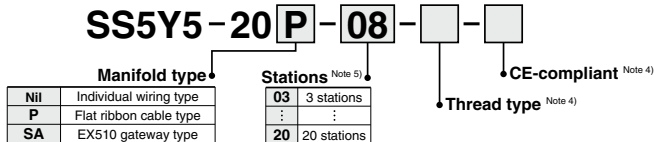

Note 4) Refer to pages 438 and 448 for details.
Note 5) 20P (Flat ribbon cable type): Max. 12 stations


Example

SS5Y5-20-05 1 set
*SY5A2R-5LOU-C6... 5 sets



↳ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

SY5000



Dimensions/Single Unit: SY5A2R

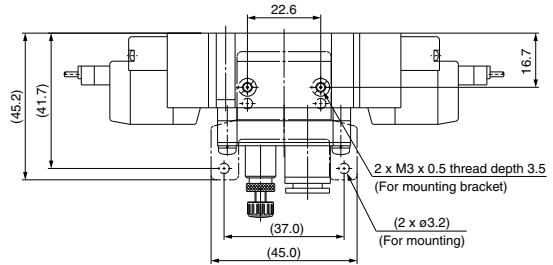



Details of Manual Portion

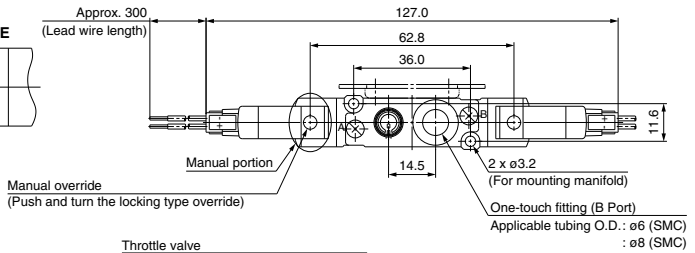

Light/surge voltage suppressor

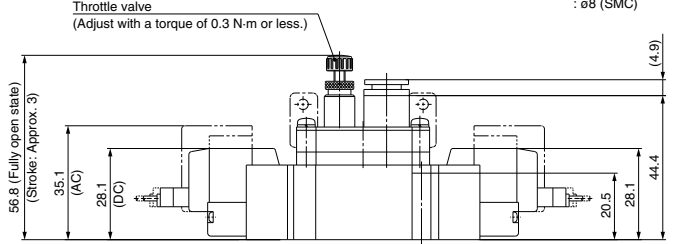




Symbol

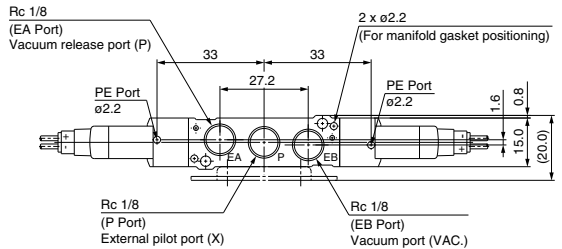


[Remarks for valves]

- Note 1) Refer to pages 450, 636 and 637 for the details of electrical entry and electrical circuit with a light/surge voltage suppressor.
- Note 2) Diagrams above are compatible with SY5A2R-□□□□□□□□(F2).
- Note 3) When mounted with brackets, the product is mounted in a place specified with one dot chain lines.
- Note 4) Applicable pilot valves are SY114/SY115-□□□□.

Dimensions/Manifold: SS5Y5-20P-

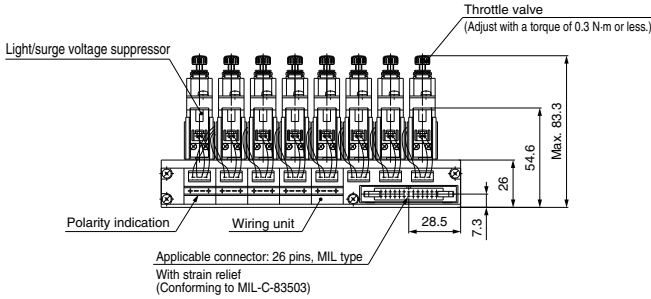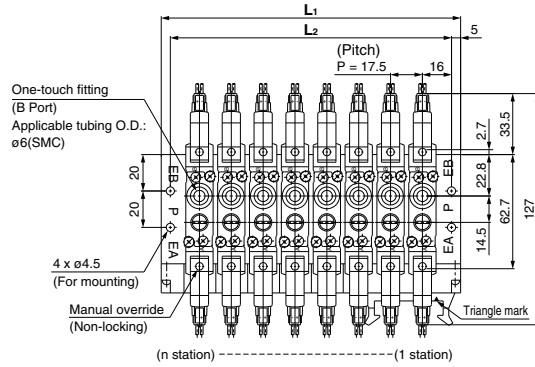


Pneumatic Circuit

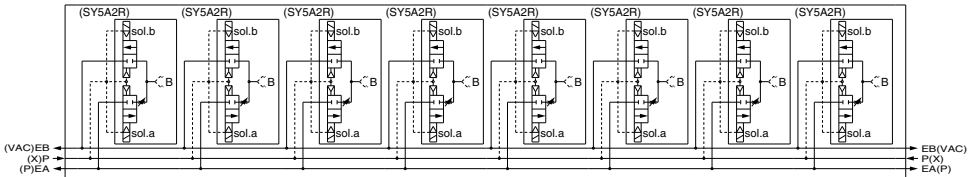

Schematic of Connector (Example: For this figure)

(Light/surge voltage suppressor is not included.)

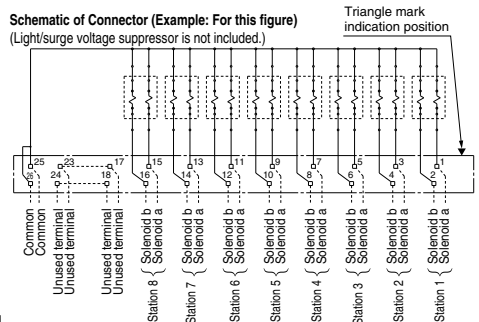

L: Dimensions: mm

| n | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|----------------|----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| L ₁ | 77 | 94.5 | 112 | 129.5 | 147 | 164.5 | 182 | 199.5 | 217 | 234.5 |
| L ₂ | 67 | 84.5 | 102 | 119.5 | 137 | 154.5 | 172 | 189.5 | 207 | 224.5 |
| □ | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 |

n: Stations

* Applicable blanking plate assembly part no.:
 SS5Y5-20-□: SY5000-26-20A (with screws and gaskets)
 SS5Y5-20P-□: SY5000-26-21A (with screws, gaskets and dust cap)
 * The product cannot be mounted with standard products the SY5000/500 series on a manifold.

How to Use Manifold

⚠ Caution


<20/20P Type>

A piping port is different from that for the standard product. When not connected properly, the product will not operate properly.

[P port: External pilot port, EA port: Vacuum release pressure port, EB port: Vacuum suction port]

<20P Type>

1. If a large amount of drainage is included in the supply air, it may cause electrical trouble since a wiring unit is located in the place where exhaust from the PE port directly goes through. Be sure to control the supply air.
2. For more than 10 stations, both poles of the common should be wired.
3. When replacing a solenoid valve, etc., be sure to mount it by placing the solenoid a side on the connector (MIL type) side.
4. Terminal no. is not indicated on the connector.
5. The terminal no. indicated in the connection schematic of connector, as shown in the reference, means a correlation of 1, 2, 3...26 from the triangle mark side on the flat ribbon cable of connector. (Refer to the reference drawing.)



SY300/500 Series

Made to Order

Body Ported External Pilot/Fluororubber for Main Valve



Body Ported External Pilot

Applicable solenoid valves: SY3□3, SY5□3



Entry is the same as standard products.

Note) Din terminal is not available for the SY300 series.

| | |
|----|--------------|
| NH | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.


Operating pressure range MPa

| | |
|--------------------------|-----------------|
| Operating pressure range | -100 kPa to 0.7 |
| Pilot pressure range | 0.25 to 0.7 |

External pilot port

| Series | Port size |
|--------|-----------|
| SY300 | M3 x 0.5 |
| SY500 | M5 x 0.8 |

Dimensions

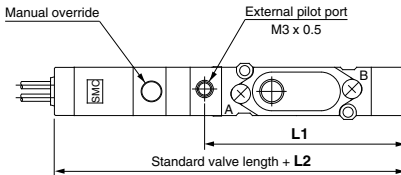


Dimensions/External Pilot Port Position


| Series | L1 dimensions | L2 dimensions |
|--------|---------------|---------------|
| SY300 | 41.5 | 6.5 |
| SY500 | 60.4 | 9 |

Symbol


Body ported
Normally closed (N.C.)
Single solenoid




Normally closed (N.C.)
Double solenoid



Normally open (N.O.)
Single solenoid



Normally open (N.O.)
Double solenoid




Main Valve Fluororubber Specifications

Fluororubber is used for rubber parts of the main valve to allow use in applications such as the following.

- When using a lubricant other than the recommended turbine oil, and there is a possibility of malfunction due to swelling of the spool valve seals.

Applicable solenoid valves: SY3□3, SY5□3



Entry is the same as standard products.

Specifications and performance are the same as standard products.

| | |
|----|--------------|
| NH | — |
| Q | CE-compliant |

Note) AC-type models that are CE-compliant have DIN terminals only.

SJ
SY
SY
S0700
S0700

SY3000/5000/7000/9000 Series

Pilot Valve Assembly

Port Block Assembly

How to Order Pilot Valve Assembly

V111 - 5 G

Coil specifications

| Nil | Standard |
|-----|---|
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, DO or W□ type.

Rated voltage

| | |
|---|--|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |
| 1 | 100 VAC ^{50/60} Hz |
| 2 | 200 VAC ^{50/60} Hz |
| 3 | 110 VAC ^{50/60} Hz [115 VAC ^{50/60} Hz] |
| 4 | 220 VAC ^{50/60} Hz [230 VAC ^{50/60} Hz] |

* For type W□, DC voltage is only available.

* CE-compliant: For DC only.

Light/Surge voltage suppressor

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type.

Electrical entry

| | |
|----|-------------------------------|
| G | Grommet, 300 mm lead wire |
| H | Grommet, 600 mm lead wire |
| L | With lead wire |
| LN | Without lead wire |
| LO | Without connector |
| M | With lead wire |
| MM | Without lead wire |
| MO | Without connector |
| WO | Without connector cable |
| W□ | With connector cable (Note 1) |

* For connector cable of M8 connector, refer to page 641.
Note 1) Enter the cable length symbols in □. Please be sure to fill in the blank referring to page 642.

DIN terminal type

V115 - 5 D

Rated voltage

| | |
|---|--|
| 5 | 24 VDC |
| 6 | 12 VDC |
| 1 | 100 VAC ^{50/60} Hz |
| 2 | 200 VAC ^{50/60} Hz |
| 3 | 110 VAC ^{50/60} Hz [115 VAC ^{50/60} Hz] |
| 4 | 220 VAC ^{50/60} Hz [230 VAC ^{50/60} Hz] |

* DC specifications of type D and DO is only available with 12 and 24 VDC.

Light/Surge voltage suppressor

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor (Non-polar type) |
| Z | With light/surge voltage suppressor (Non-polar type) |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Electrical entry

| | | |
|----|-------------------|-------------------|
| D | DIN terminal | With connector |
| DO | terminal (Type D) | Without connector |
| Y | DIN terminal | With connector |
| YO | terminal (Type Y) | Without connector |

Note) Do not replace V111 (G, H, L, M) to V115 (DIN terminal) and vice versa when replacing pilot valve assembly only.

How to Order Port Block Assembly

SY 000 - 6A -

| Series | Symbol | Port size | Applicable series |
|--------|--------|-----------|-------------------|
| 3 | SY3000 | M5 | M5 x 0.8 |
| 5 | SY5000 | 01 | 1/8 |
| 7 | SY7000 | 02 | 1/4 |
| 9 | SY9000 | 02 | 1/4 |
| | | 03 | 3/8 |

A, B port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |
| 02 | 1/4 | SY9000 |
| 03 | 3/8 | SY9000 |

Thread type

| Nil | Rc |
|-----|------|
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY3000 |
| C4 | One-touch fitting for ø4 | SY5000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C8 | One-touch fitting for ø8 | SY5000 |
| C8 | One-touch fitting for ø8 | SY7000 |
| C10 | One-touch fitting for ø10 | SY7000 |
| C8 | One-touch fitting for ø8 | SY9000 |
| C10 | One-touch fitting for ø10 | SY9000 |
| C12 | One-touch fitting for ø12 | SY9000 |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|--------|-------------------------------|-------------------|
| N3 | One-touch fitting for ø 5/32" | SY3000 |
| N7 | One-touch fitting for ø 1/4" | SY3000 |
| N3 | One-touch fitting for ø 5/32" | SY5000 |
| N7 | One-touch fitting for ø 1/4" | SY5000 |
| N9 | One-touch fitting for ø 3/16" | SY7000 |
| N9 | One-touch fitting for ø 3/16" | SY7000 |
| N11 | One-touch fitting for ø 3/8" | SY7000 |
| N9 | One-touch fitting for ø 3/16" | SY9000 |
| N11 | One-touch fitting for ø 3/8" | SY9000 |

How to Change Port Block Assembly

Connecting port size of A and B can be changed by replacing port block assembly mounted on body. When changing block assembly, correct screw torque must be achieved to avoid trouble; e.g. air leakage. With the one-touch fitting port block assembly, it is only necessary to change the fitting and not the whole block. Refer to following part numbers.


One-touch fitting (Metric size)

| Port size | Fitting assembly part no. | Applicable series |
|---------------------------|---------------------------|-------------------|
| One-touch fitting for ø4 | VVQ1000-50A-C4 | SY3000 |
| One-touch fitting for ø6 | VVQ1000-50A-C6 | SY3000 |
| One-touch fitting for ø4 | VVQ1000-51A-C4 | SY5000 |
| One-touch fitting for ø6 | VVQ1000-51A-C6 | SY5000 |
| One-touch fitting for ø8 | VVQ1000-51A-C8 | SY5000 |
| One-touch fitting for ø8 | VVQ2000-51A-C8 | SY7000 |
| One-touch fitting for ø10 | VVQ2000-51A-C10 | SY7000 |
| One-touch fitting for ø8 | VVQ4000-50B-C8 | SY9000 |
| One-touch fitting for ø10 | VVQ4000-50B-C10 | SY9000 |
| One-touch fitting for ø12 | VVQ4000-50B-C12 | SY9000 |

One-touch fitting (Inch size)

| Port size | Fitting assembly part no. | Applicable series |
|------------------------------|---------------------------|-------------------|
| One-touch fitting for ø5/32" | VVQ1000-50A-N3 | SY3000 |
| One-touch fitting for ø1/4" | VVQ1000-50A-N7 | SY3000 |
| One-touch fitting for ø5/32" | VVQ1000-51A-N3 | SY5000 |
| One-touch fitting for ø1/4" | VVQ1000-51A-N7 | SY5000 |
| One-touch fitting for ø5/16" | VVQ1000-51A-N9 | SY5000 |
| One-touch fitting for ø1/4" | VVQ2000-51A-N9 | SY7000 |
| One-touch fitting for ø3/8" | VVQ2000-51A-N11 | SY7000 |
| One-touch fitting for ø5/16" | VVQ4000-50B-N9 | SY9000 |
| One-touch fitting for ø3/8" | VVQ4000-50B-N11 | SY9000 |

Note) Purchasing order is available in units of 10 pieces.

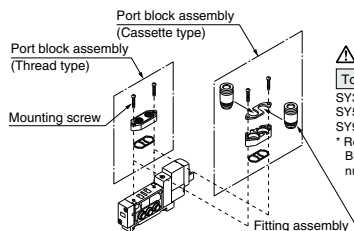

Caution

Torque for mounting screws

SY3000 (M2): 0.12N·m
SY5000/7000 (M3): 0.6·Nm
SY9000 (M4): 1.4N·m

* Refer to "How to Change Port Block Assembly" for part numbers.

Note) Since V111 and V115 are CE-compliant standard, the suffix "-Q" is not necessary.

5 Port Solenoid Valve

Body Ported/Single Unit

SY3000/5000/7000/9000 Series



How to Order

30 - SY 5 1 20 - 5 L - 01 - - - -

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

Conforming to UL standard

Type of actuation

| | |
|---|--|
| 1 | 2 position single (A)4 2(B) (EA)5 1 3(EB) (P) |
| 2 | 2 position double (A)4 2(B) (EA)5 1 3(EB) (P) |
| 3 | 3 position closed center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 5 | 3 position pressure center (A)4 2(B) (EA)5 1 3(EB) (P) |

Coil specifications

| | |
|------------|---|
| NII | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

| DC | |
|----------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

Rated voltage

| | | |
|---------------------|----------|--------|
| AC (50/60Hz) | B | 24 VAC |
|---------------------|----------|--------|

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.

Electrical entry

| 24, 12, 6, 5, 3 VDC/24 VAC | | | 24, 12 VDC/24 VAC |
|--|--|--|---|
| Grommet G: Lead wire (Length 300 mm) | L plug connector L: With lead wire (Length 300 mm) | M plug connector M: With lead wire MN: Without lead wire (Length 300 mm) | DIN terminal D, Y: With connector |
| H: Lead wire length 600 mm | LN: Without lead wire | LO: Without connector | DO, YO: Without connector |

| | |
|--|---|
| 24, 12, 6, 5, 3 VDC | * LN, MN type: with 2 sockets. |
| M8 connector | * For DIN terminal of SY3000 series, refer to page 639. |
| W□: Without connector cable | * "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638. |
| | * For connector cable of M8 connector, refer to page 641. |
| W1: With connector cable (Length 0.3 m) | * Refer to page 638 for the lead wire length of L and M plug connectors. |
| W2: With connector cable (Length 0.5 m) | |
| W3: With connector cable (Length 1 m) | |
| W4: With connector cable (Length 2 m) | |
| W7: With connector cable (Length 5 m) | |
| | |

A, B port size Thread piping

| Symbol | Port size | Applicable series |
|-----------|-----------|-------------------|
| M5 | M5 x 0.8 | SY3000 |
| 01 | 1/8 | SY5000 |
| 02 | 1/4 | SY7000 |
| 02 | 1/4 | SY9000 |
| 03 | 3/8 | SY9000 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|------------|---------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY3000 |
| C6 | One-touch fitting for ø6 | SY5000 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | SY7000 |
| C8 | One-touch fitting for ø8 | |
| C10 | One-touch fitting for ø10 | SY9000 |
| C10 | One-touch fitting for ø10 | |
| C12 | One-touch fitting for ø12 | |

One-touch fitting (Inch size)

| Symbol | Port size | Applicable series |
|------------|------------------------------|-------------------|
| N3 | One-touch fitting for ø 3/32 | SY3000 |
| N7 | One-touch fitting for ø 1/4" | |
| N3 | One-touch fitting for ø 3/32 | SY5000 |
| N7 | One-touch fitting for ø 1/4" | |
| N9 | One-touch fitting for ø 9/16 | SY7000 |
| N9 | One-touch fitting for ø 9/16 | |
| N11 | One-touch fitting for ø 3/8" | SY9000 |
| N9 | One-touch fitting for ø 9/16 | |
| N11 | One-touch fitting for ø 3/8" | |

Manual override

| | | |
|---------------------------------------|--|--|
| NII: Non-locking push type | D: Push-turn locking slotted type | E: Push-turn locking lever type |
|---------------------------------------|--|--|

Light/Surge voltage suppressor


| Electrical entry for G, H, L, M, W | | Electrical entry for D, Y | |
|------------------------------------|--|---------------------------|--|
| NII | Without light/surge voltage suppressor | NII | Without light/surge voltage suppressor |
| S | With surge voltage suppressor | S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor | Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) | DOZ | Without light/surge voltage suppressor |
| U | With light/surge voltage suppressor (Non-polar type) | | |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type


Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary. (For details, refer to page 467.)

Bracket

NII: Without bracket
F1: With foot bracket



F2: With side bracket



* SY9000 has no bracket.

Thread type

| | |
|------------|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

Made to Order

| | |
|------------|---|
| NII | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluororubber (Refer to page 624.) |

CE-compliant

| | |
|------------|--------------|
| NII | — |
| Q | CE-compliant |

5 Port Solenoid Valve

Base Mounted/Single Unit

SY3000/5000/7000/9000 Series



How to Order

30-SY 5 2 40 [] [] - **5 L** [] [] [] [] [] [] [] []

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

• Conforming to UL standard

Pilot type

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---|
| NII | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| | |
|----|---------------|
| DC | AC (50/60 Hz) |
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |
| B | 24 VAC |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.

Port size

| Symbol | Port size | Applicable series |
|--------|--------------------|-------------------|
| NII | Without sub-plate | |
| 01 | 1/8 With sub-plate | SY3000 |
| 02 | 1/4 With sub-plate | SY5000 SY7000 |
| 03 | 3/8 With sub-plate | SY7000 SY9000 |
| 04 | 1/2 With sub-plate | SY9000 |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Made to Order

| | |
|-----|--|
| NII | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Thread type

| | |
|-----|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Manual override

NII: Non-locking push type

D: Push-turn locking slotted type

E: Push-turn locking lever type

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| NII | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

Electrical entry for D, Y

| | |
|-----|--|
| NII | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type

Type of actuation

| | |
|---|--|
| 1 | 2 position single (A)4 2(B) (EA)5 1 3(EB) (P) |
| 2 | 2 position double (A)4 2(B) (EA)5 1 3(EB) (P) |
| 3 | 3 position closed center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (EA)5 1 3(EB) (P) |
| 5 | 3 position pressure center (A)4 2(B) (EA)5 1 3(EB) (P) |

Electrical entry

| 24, 12, 6, 5, 3 VDC/24 VAC | | | | 24, 12 VDC/24 VAC | 24, 12, 6, 5, 3 VDC |
|-----------------------------------|--|--|------------------------------|------------------------------------|--|
| Grommet | L plug connector | M plug connector | DIN terminal | D, Y: With connector | M8 connector |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | MN: Without lead wire | WO: Without connector cable | |
| | | | | | |
| H: Lead wire length 600 mm | LN: Without lead wire | LO: Without connector | MO: Without connector | DO, YO: Without connector | W1: With connector cable (Length 0.3 m) W2: With connector cable (Length 0.5 m) W3: With connector cable (Length 1 m) W4: With connector cable (Length 2 m) W7: With connector cable (Length 5 m) |
| | | | | | |

* LN, MN type: with 2 sockets.
* For DIN terminal of SY3000 series, refer to page 639.
* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.
* For connector cable of M8 connector, refer to page 641.
* Refer to page 638 for the lead wire length of L and M plug connectors.
Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

Refer to the standard product for specifications and dimensions.



SJ
SY
SY
S0700
S0700

3 Port Solenoid Valve Body Ported/Single Unit



SY300/500 Series

How to Order

30-SY 5 1 3 **-5 L** **-01**

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

UL standard compliant

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.O.) |

Solenoid type

| | |
|-----|-----------------|
| Nil | Single solenoid |
| D | Double solenoid |

Coil specifications

| | |
|-----|---|
| Nil | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

Rated voltage

| | |
|-----------|------------------|
| DC | AC (%/Hz) |
| 5 24 VDC | B 24 VAC |
| 6 12 VDC | |
| V 6 VDC | |
| S 5 VDC | |
| R 3 VDC | |

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.

Thread type

| | |
|-----|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |

* Except for M5

A port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| M5 | M5 x 0.8 | SY300 |
| 01 | 1/8 | SY500 |

One-touch fitting (Metric size)

| Symbol | Port size | Applicable series |
|--------|--------------------------|-------------------|
| C4 | One-touch fitting for ø4 | SY300 |
| C6 | One-touch fitting for ø6 | |
| C4 | One-touch fitting for ø4 | SY500 |
| C6 | One-touch fitting for ø6 | |
| C8 | One-touch fitting for ø8 | |

One-touch fitting (inch size)

| Symbol | Port size | Applicable series |
|--------|------------------------------|-------------------|
| N3 | One-touch fitting for ø5/16" | SY300 |
| N7 | One-touch fitting for ø1/4" | |
| N3 | One-touch fitting for ø5/16" | SY500 |
| N7 | One-touch fitting for ø1/4" | |
| N9 | One-touch fitting for ø9/16" | |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Made to Order

| | |
|-----|---|
| Nil | — |
| X20 | Body ported external pilot (Refer to page 624.) |
| X90 | Main valve fluororubber (Refer to page 624.) |

Bracket

Nil: Without bracket
F1: With foot bracket (2 position (single only))
F2: With side bracket

Light/Surge voltage suppressor

Electrical entry for G, H, L, M, W

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) |
| U | With light/surge voltage suppressor (Non-polar type) |

* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type

Electrical entry for D, Y

| | |
|-----|--|
| Nil | Without light/surge voltage suppressor |
| S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

Manual override

Nil: Non-locking push type
D: Push-turn locking slotted type
E: Push-turn locking lever type

Electrical entry

| 24, 12, 6, 5, 3 VDC/24 VAC | | 24, 12 VDC/24 VAC | | 24, 12, 6, 5, 3 VDC | |
|-----------------------------------|--|--|------------------------------|--|--|
| Grommet | L plug connector | M plug connector | DIN terminal | M8 connector | |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | D: With connector | W0: Without connector cable | |
| H: Lead wire length 600 mm | LN: Without lead wire | MN: Without lead wire | DO: Without connector | W1: With connector cable (Length 300 mm) | |
| | LC: Without connector | MC: Without connector | Y: With connector | W2: With connector cable (Length 500 mm) | |
| | | | YO: Without connector | W3: With connector cable (Length 1000 mm) | |
| | | | | W4: With connector cable (Length 2000 mm) | |
| | | | | W7: With connector cable (Length 5000 mm) | |

* LN, MN type: with 2 sockets.

* For DIN terminal of SY300 series, refer to page 639.

* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.

* For connector cable of M8 connector, refer to page 641.

* Refer to page 638 for the lead wire length of L and M plug connectors.

(Note) When placing an order for body ported solenoid valve as a single unit, mounting screw for manifold and gasket are not attached. Order them separately, if necessary.
(Refer to page 467 for details.)

3 Port Solenoid Valve Base Mounted/Single Unit



SY300/500 Series

How to Order

30-SY 5 1 5 [] [] [] - **5 L** [] [] [] [] []

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

UL standard compliant

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.O.) |

Solenoid type

| | |
|-----|-----------------|
| NII | Single solenoid |
| D | Double solenoid |

Pilot type

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

Coil specifications

| | |
|-----|---|
| NII | Standard |
| T | With power saving circuit (24 VDC, 12 VDC only) |

* Power saving circuit is not available in the case of D, Y, DO, YO or W□ type.

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Thread type

| | |
|-----|------|
| NII | Rc |
| F | G |
| N | NPT |
| T | NPTF |

Made to Order

| | |
|-----|--|
| NII | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

Port size

| Symbol | Port size | Applicable series |
|--------|--------------------|-------------------|
| NII | Without sub-plate | |
| 01 | 1/8 With sub-plate | SY300 |
| 02 | 1/4 With sub-plate | SY500 |

Manual override

| | | |
|--|---|---|
| <p>NII: Non-locking push type</p> | <p>D: Push-turn locking slotted type</p> | <p>E: Push-turn locking lever type</p> |
|--|---|---|

Rated voltage

| DC | AC (50/60 Hz) |
|----|---------------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC |
| S | 5 VDC |
| R | 3 VDC |

B 24 VAC

* DC specifications of type D, Y, DO and YO is only available with 12 and 24 VDC.
* For type W□, DC voltage is only available.

Electrical entry

| 24, 12, 6, 5, 3 VDC/24 VAC | | | 24, 12 VDC/24 VAC | | 24, 12, 6, 5, 3 VDC | |
|-----------------------------------|--|--|------------------------------|--|---------------------|--|
| Grommet | L plug connector | M plug connector | DIN terminal | M8 connector | | |
| G: Lead wire length 300 mm | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | D: With connector | WO: Without connector cable | | |
| H: Lead wire length 600 mm | LN: Without lead wire | MN: Without lead wire | DO: Without connector | W1: With connector cable (Length 300 mm) | | |
| | LO: Without connector | MO: Without connector | Y: With connector | W2: With connector cable (Length 500 mm) | | |
| | | | YO: Without connector | W3: With connector cable (Length 1000 mm) | | |
| | | | | W4: With connector cable (Length 2000 mm) | | |
| | | | | W7: With connector cable (Length 5000 mm) | | |

Light/Surge voltage suppressor

| Electrical entry for G, H, L, M, W | | Electrical entry for D, Y | |
|------------------------------------|--|---------------------------|--|
| NII | Without light/surge voltage suppressor | NII | Without light/surge voltage suppressor |
| S | With surge voltage suppressor | S | With surge voltage suppressor |
| Z | With light/surge voltage suppressor | Z | With light/surge voltage suppressor |
| R | With surge voltage suppressor (Non-polar type) | | |
| U | With light/surge voltage suppressor (Non-polar type) | | |

* DOZ and YOZ are not available.
* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.
* For "R" and "U", DC voltage is only available.
* Power saving circuit is only available in the "Z" type

SY
SY
S0700
S0700

* LN, MN type: with 2 sockets.
* For DIN terminal of SY300 series, refer to page 639.
* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C). For details, refer to page 638.
* For connector cable of M8 connector, refer to page 641.
* Refer to page 638 for the lead wire length of L and M plug connectors.
Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

SY300/500 Series



Base Mounted/How to Order Valve

Plug-in: for SS5Y₅³-45□

Single solenoid 30 – SY **5** **1** 5 □ – **5** FU □ □ – □
 Double solenoid 30 – SY **5** **1** 5C □ – **5** FU □ □ – □

Series

| | |
|---|-------|
| 3 | SY300 |
| 5 | SY500 |

Type of actuation

| | |
|---|------------------------|
| 1 | Normally closed (N.C.) |
| 2 | Normally open (N.C.) |

Dual body type

* When ordering double solenoid valves (Dual body type), please keep in mind that they require two manifold stations.

Pilot type

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

Rated voltage


| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Made to Order

| | |
|-----|--|
| NII | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

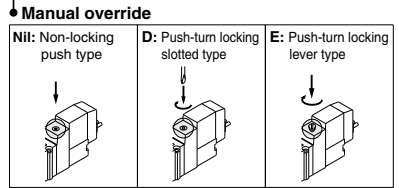

Plug-in: For SS5Y₅³-45F/45P□/45T/45T1

2 position single 30 – SY **3** 1 40 □ – **5** FU □ □ – □
 Double, 3 position 30 – SY **3** **2** 45 □ – **5** FU □ □ – □

Series

| | |
|---|--------|
| 3 | SY3000 |
| 5 | SY5000 |

Type of actuation

| | |
|---|----------------------------|
| 2 | 2 position double |
| 3 | 3 position closed center |
| 4 | 3 position exhaust center |
| 5 | 3 position pressure center |

Dual body type (Double, 3 position)

Pilot type

| | |
|-----|----------------|
| NII | Internal pilot |
| R | External pilot |

Rated voltage


| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

CE-compliant

| | |
|-----|--------------|
| NII | — |
| Q | CE-compliant |

Made to Order

| | |
|-----|--|
| NII | — |
| X90 | Main valve fluororubber (Refer to page 624.) |

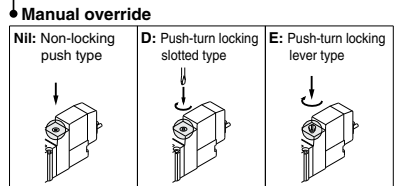



SY Series

Specific Product Precautions 1

Be sure to read this before handling the products.


Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Manual Override Operation

Warning

■ Non-locking push type [Standard]


Press in the direction of the arrow



■ Push-turn locking slotted type [Type D]

While pressing, turn in the direction of the arrow.

If it is not turned, it can be operated the same way as the non-locking type.



Locked position



Caution


When operating the locking type D with a screw driver, turn it gently using a watchmakers screw driver.

[Torque: Less than 0.1 N·m]

■ Push-turn locking lever type [Type E]

While pressing, turn it the direction of the arrow.

If it is not turned, it can be operated the same way as the non-locking type.



Locked position



Caution

When locking the manual override on the push-turn locking types (D, E), be sure to push it down before turning.

Turning without first pushing it down can cause damage to the manual override and trouble such as air leakage, etc.

Solenoid Valve for 200, 220 VAC Specifications

Warning

Solenoid valves with grommet and L/M type plug connector AC specifications have a built-in rectifier circuit in the pilot section to operate the DC coil.

With 200 V, 220 VAC specification pilot valves, this built-in rectifier generates heat when energized. The surface may become hot depending on the energized condition; therefore, do not touch the solenoid valves.

Exhaust Throttle

Caution

With the SY series, the pilot valve and main valve share a common exhaust inside the valve. Therefore, do not block the exhaust port when arranging the piping.

SY3000/5000/7000/9000 Series Used as a 3-Port Valve

Caution

In case of using a 5-port valve as a 3-port valve

The SY3000/5000/7000/9000 series can be used as normally closed (N.C.) or normally open (N.O.) 3-port port valves by closing one of the cylinder ports (A or B) with a plug. However, they should be used with the exhaust ports kept open. (Refer to pages 610 to 615 for dedicated 3-port solenoid valve.)

| Plug position | | B port | A port |
|---------------------|--------|--------|--------|
| Configuration | | N.C. | N.O. |
| Number of solenoids | Single | | |
| | Double | | |

SJ

SY

SY

S0700

S0700



SY Series

Specific Product Precautions 2

Be sure to read this before handling the products.


Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

How to Use Plug Connector

⚠ Caution


1. Attaching and detaching connectors

- To attach a connector, hold the lever and connector unit between your fingers and insert straight onto the pins of the solenoid valve so that the lever's pawl is pushed into the groove and locks.
- To detach a connector, remove the pawl from the groove by pushing the lever downward with your thumb, and pull the connector straight out.

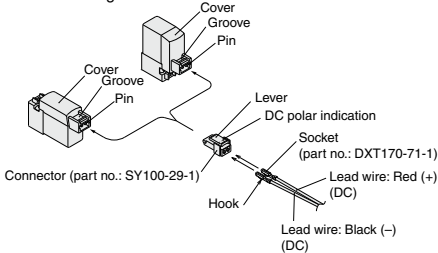

2. Crimping connection of lead wire and socket

Strip 3.2 to 3.7 mm at the end of lead wires, insert the end of the core wires evenly into the sockets, and then crimp it by a crimping tool. When this is done, take care that the coverings of the lead wires do not enter the core wire crimping area. (Please contact SMC for the dedicated crimping tools.)

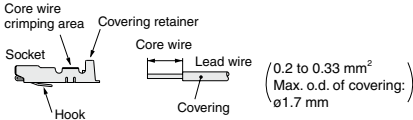

3. Attaching and detaching lead wires with sockets

• Attaching


Insert the sockets into the square holes of the connector (+, - indication), and continue to push the sockets all the way in until they lock by hooking into the seats in the connector.

(When they are pushed in, their hooks open and they are locked automatically.) Then confirm that they are locked by pulling lightly on the lead wires.

• Detaching

To detach a socket from a connector, pull out the lead wire while pressing the socket's hook with a stick having a thin tip (approx. 1 mm).

If the socket will be used again, first spread the hook outward.



Surge Voltage Suppressor


⚠ Caution

<For DC>


Grommet, L/M Plug Connector

■ Polar type

With surge voltage suppressor (□S)




With light/surge voltage suppressor (□Z)




■ Non-polar type

With surge voltage suppressor (□R)




With light/surge voltage suppressor (□U)



- Connect the standard type in accordance with the +, - polarity indication. (The non-polar type can be used with the connections made either way.)
- Since voltage specifications other than polar type 24 V and 12 VDC do not have diodes for polarity protection, be careful not to make errors in the polarity.
- When wiring is done at the factory, positive (+) is red and negative (-) is black.

■ With power saving circuit

Power consumption is decreased by 1/4 by reducing the wattage required to hold the valve in an energized state. (Effective energizing time is over 62 ms at 24 VDC.)




Operating Principle

With the above circuit, the current consumption when holding is reduced to save energy. Please refer to the electric wave data below.

- Please be careful not to reverse the polarity, since a diode to prevent the reversed current is not provided for the power saving circuit.

(In the case of SY₇≠0T, the electric wave form of energy saving type)





SY Series


Specific Product Precautions 3

Be sure to read this before handling the products.


Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Surge Voltage Suppressor


DIN Terminal



With surge voltage suppressor (DS)



With light/surge voltage suppressor (DZ)




DIN terminal has no polarity.


M8 Connector

■ Polar type

With surge voltage suppressor (□S)




With light/surge voltage suppressor (□Z)




■ Non-polar type


With surge voltage suppressor (□R)



With light/surge voltage suppressor (□U)



Solenoid valve side pin wiring diagram

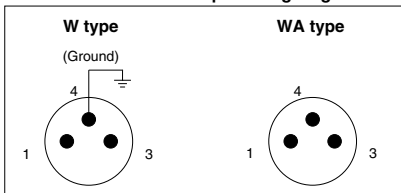


Note) The WA-type valve cannot be grounded.

M8 Connector

- For wiring of the polar type, connect + to 1 and – to 3 for Type W, while + to 4 and – to 3 for Type WA.
- Since voltage specifications other than polar type 24 V and 12 VDC do not have diodes for polarity protection, be careful not to make errors in the polarity.

Plug-in

Circuit for non-polar (FU)




Plug-in valve has no polarity, so its possible to use for both manifold bases for positive (SS5Y²-45□) and negative its common (SS5Y²-45N□) types.

<For AC>

(There is no "S" option, because the generation of surge voltage is prevented by a rectifier.)


Grommet, L/M Plug Connector

With light



DIN Terminal

With light (YZ)



Note) Surge voltage suppressor of varistor has residual voltage corresponding to the protective element and rated voltage; therefore, protect the controller side from the surge voltage. The residual voltage of the diode is approximately 1 V.

SJ

SY

SY

S0700

S0700



SY Series

Specific Product Precautions 4

Be sure to read this before handling the products.


Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Plug Connector Lead Wire Length

⚠ Caution

Standard length is 300mm, but the following lengths are also available.

How to Order Connector Assembly

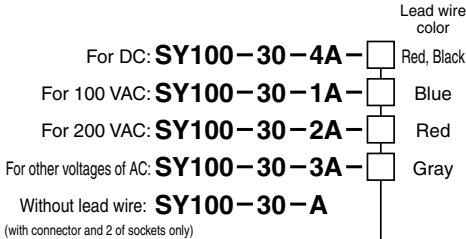

• How to Order

Specify the part numbers of the solenoid valve without connector and the connector assembly with protective cover separately.

<Example> Lead wire length 2000 mm

| | |
|-----------------------|-----------------------|
| For DC | For AC |
| SY3120-5LO-M5 | SY3120-1LO-M5 |
| SY100-30-4A-20 | SY100-30-1A-20 |

| Lead wire length | |
|------------------|---------|
| Nil | 300 mm |
| 6 | 600 mm |
| 10 | 1000 mm |
| 15 | 1500 mm |
| 20 | 2000 mm |
| 25 | 2500 mm |
| 30 | 3000 mm |
| 50 | 5000 mm |

How to Use DIN Terminal

⚠ Caution

Connection

1. Loosen the holding screw and pull the connector out of the solenoid valve terminal block.
2. After removing the holding screw, insert a flat head screwdriver, etc. into the notch on the bottom of the terminal block and pry it open, separating the terminal block and the housing.
3. Loosen the terminal screws (slotted screws) on the terminal block, insert the cores of the lead wires into the terminals according to the connection method, and fasten them securely with the terminal screws.
4. Secure the cord by fastening the gland nut.

⚠ Caution

When making connections, take note that using other than the supported size ($\phi 3.5$ to $\phi 7$) heavy duty cord will not satisfy IP65 (enclosure) standards. Also, be sure to tighten the gland nut and holding screw within their specified torque ranges.

Changing the entry direction

After separating the terminal block and housing, the cord entry can be changed by attaching the housing in the desired direction (4 directions at 90° intervals).

* When equipped with a light, be careful not to damage the light with the cord's lead wires.


Precautions

Plug in and pull out the connector vertically without tilting to one side.

Compatible cable

Cord O.D.: $\phi 3.5$ to $\phi 7$

(Reference) 0.5mm², 2-core or 3-core, equivalent to JIS C 3306

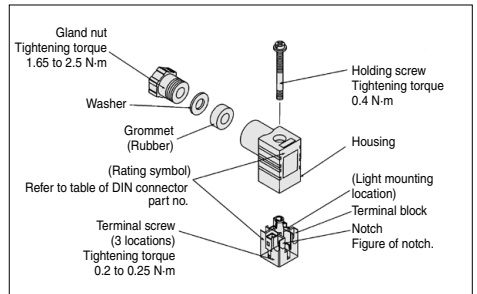

Type "Y"

DIN connector type Y is a DIN connector that conforms to the DIN pitch 8-mm standard.

- D type DIN connector with 9.4 mm pitch between terminals is not interchangeable.
- To distinguish from the D type DIN connector, "N" is listed at the end of voltage symbol. (For connector parts without lights, "N" is not indicated. Please refer to the name plate to distinguish.)
- Dimensions are completely the same as D type DIN connector.
- When exchanging the pilot valve assembly only, "V115-□□" is interchangeable with "V115-□□Y". Do not replace V111 (G, L, M) to V115-□□□□ (DIN terminal), and vice versa.




SY Series Specific Product Precautions 5

Be sure to read this before handling the products.
Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

SY300, SY3000 Series How to Use DIN Terminal Connector

Caution

- SMC can provide a DIN type terminal connector (body ported type, sub-plate type) for the SY300 and SY3000 series. This cannot be assembled to a standard manifold and sub-plate since the DIN connector width (15.8mm) exceeds that of the valve body (10mm). Contact SMC if you wish to use with a manifold and sub-plate. Please also note: that bracket F1 cannot be mounted.
- * The DIN terminal connector has no body ported external pilot specifications for both single unit and manifold.

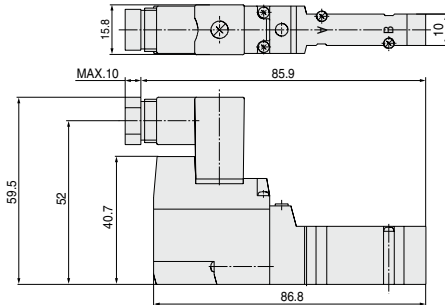

DIN Connector Part No.

Caution

<Type D>

| | |
|---------------|------------|
| Without light | SY100-61-1 |
|---------------|------------|

With light

| Rated voltage | Voltage symbol | Part no. |
|---------------|----------------|---------------|
| 24 VDC | 24 V | SY100-61-3-05 |
| 12 VDC | 12 V | SY100-61-3-06 |
| 100 VAC | 100 V | SY100-61-2-01 |
| 200 VAC | 200 V | SY100-61-2-02 |
| 110 VAC | 110 V | SY100-61-2-03 |
| 220 VAC | 220 V | SY100-61-2-04 |


<Type Y>

| | |
|---------------|------------|
| Without light | SY100-82-1 |
|---------------|------------|

With light

| Rated voltage | Voltage symbol | Part no. |
|-------------------|----------------|---------------|
| 24 VDC | 24 VN | SY100-82-3-05 |
| 12 VDC | 12 VN | SY100-82-3-06 |
| 100 VAC | 100 VN | SY100-82-2-01 |
| 200 VAC | 200 VN | SY100-82-2-02 |
| 110 VAC (115 VAC) | 110 VN | SY100-82-2-03 |
| 220 VAC (230 VAC) | 220 VN | SY100-82-2-04 |

Circuit Diagram with Light

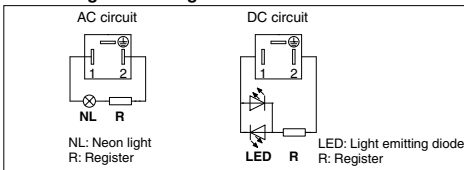

Connector Assembly with Cover

Caution

Connector assembly with dust proof protective cover.

- Effective to prevention of short circuit failure due to the entry of foreign matter into the connector.
- Chloroprene rubber for electrical use, which provides outstanding weather resistance and electrical insulation, is used for the cover material. However, do not allow contact with cutting oil, etc.
- Simple and unencumbered appearance by adopting round-shaped cord.


How to Order

SY100-68-A - □

Lead wire length (L)

| | |
|-----|---------|
| Nil | 300 mm |
| 6 | 600 mm |
| 10 | 1000 mm |
| 15 | 1500 mm |
| 20 | 2000 mm |
| 25 | 2500 mm |
| 30 | 3000 mm |
| 50 | 5000 mm |

Connector Assembly with Cover: Dimensions

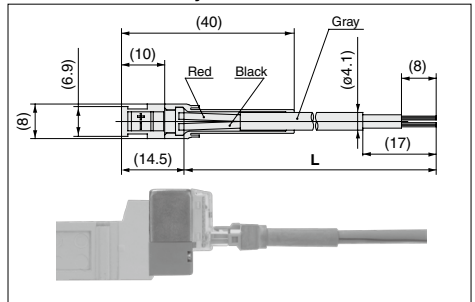

How to Order

Enter the part number for a plug connector solenoid valve without connector together with the part number for a connector assembly with cover.

<Example 1> Lead wire length of 2000 mm

SY3120-5LOZ-M5

SY100-68-A-20

<Example 2> Lead wire length of 300 mm (standard)

SY3120-5LPZ-M5

□ Symbol for connector assembly with cover

* In this case, the part number for the connector assembly with cover is not required.



SY Series

Specific Product Precautions 6

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Plug-in

⚠ Caution

■ When using a double solenoid valve (Dual body type: SY $\frac{3}{4}$ 245-□FU) on the plug-in type manifold (SS5Y $\frac{3}{4}$ 45(N)□), two manifold stations are required per valve.


Output to A/B ports will be made through the manifold block on the side indicated by an arrow on the top of the solenoid valve. Therefore, arrange the piping on the side indicated by the arrow.

Although the "T" side will not be used, plugs will not be necessary since it is sealed with the valve.

(However, insert a plug into the A/B ports if dust intrusion is possible. Refer to page 567.)


Manifold valve

SS5Y $\frac{3}{4}$ -45 (N)□




Plug-in type solenoid valves consist of a non-polar solenoid valve and a plug-in socket. When ordering them separately, refer to the following part numbers.

[Single solenoid]



[Double, 3 position Dual body type]



Note) Using a valve other than a non-polar type may cause trouble.

DIN Rail for SY7000/9000 Series

⚠ Caution

The DIN rail used with the SY7000 and SY9000 series is stronger than that used with the SY3000 and SY5000 series. Use this exclusive DIN rail with the SY7000 and SY9000 series. Furthermore, if using a DIN rail other than that supplied by SMC, refer to the manifold mounting section below, and mount using the same method as prescribed for side facing and rear facing, regardless of the mounting orientation.

Manifold Mounting

⚠ Caution

1. For Type 23, 43, 45, 45□ and 60 DIN rail mounting, when attaching a manifold to a mounting surface, etc., with bolts, if the entire bottom surface of the DIN rail contacts the mounting surface in a horizontal mounting, it can be used by simply securing both ends of the DIN rail. However, for any other mounting method or for side facing and rear facing, etc., secure the DIN rail with bolts at uniform intervals using the following as a guide: 2 to 5 stations at 2 locations, 6 to 10 stations at 3 locations, 11 to 15 stations at 4 locations, and 16 to 20 stations at 5 locations. In addition, even in the case of a horizontal mounting, if the mounting surface is subject to vibration, etc., take the same measures indicated above. If secured at fewer than the specified number of locations, warping or twisting may occur in the DIN rail and manifold, causing trouble such as air leakage.

Also, when using mounting screws for the DIN rail on the bottom side (L3 dimension in the dimension table) of the manifold valve body, the height of the screw head has to be as follows.

Type 23, 43 (SY9000): 8 mm or less


Type 45 (SY3000, 5000): 5.8 mm or less

For type 60:

SY3000: 4.7 mm or less

SY5000: 5.8 mm or less

SY7000: 8 mm or less

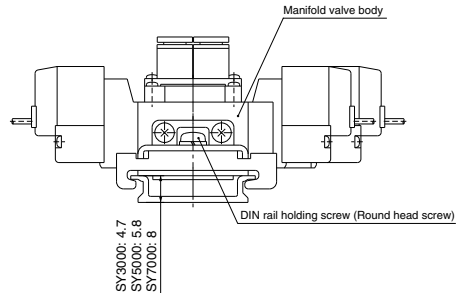

[This is the case for type 60.]

2. There will be slight variations in the width of manifold blocks due to tolerance (± 0.15 mm) for the stacking manifold type of the SS5Y9-23 series and SS5Y9-43 series.

As the manifold is made up of a combination of manifold blocks, there will be an error due to accumulated tolerance between the actual pitch dimensions of the mounting holes used to secure the manifold and the values stated in the catalog. Keep this in mind when increasing the number of stations.



SY Series

Specific Product Precautions 7

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

One-touch Fittings

⚠ Caution

When fittings are used, they may interfere with one another depending on their types and sizes. Therefore, the dimensions of the fittings to be used should first be confirmed in their respective catalogs.

• Tubing attachment/detachment for One-touch fittings

1) Attaching of tubing

1. Take a tubing having no flaws on its periphery and cut it off at a right angle. When cutting the tubing, use tubing cutters TK-1, 2 or 3. Do not use pinchers, nippers or scissors, etc. If cutting is done with tools other than tubing cutters, the tubing may be cut diagonally or become flattened, etc., making a secure installation impossible, and causing problems such as the tubing pulling out after installation or air leakage. Allow some extra length in the tubing.
2. Grasp the tubing, slowly push it straight (0 to 5°) into the One-touch fitting until it comes to a stop.
3. After inserting the tubing, pull on it lightly to confirm that it will not come out. If it is not installed securely all the way into the fitting, this can cause problems such as air leakage or the tubing pulling out.

2) Detaching of tubing

1. Push in the release button sufficiently, pushing its collar equally around the circumference.
2. Pull out the tubing while holding down the release button so that it does not come out. If the release button is not pressed down sufficiently, there will be increased bite on the tubing and it will become more difficult to pull it out.
3. When the removed tubing is to be used again, cut off the portion which has been chewed before reusing it. If the chewed portion of the tubing is used as is, this can cause trouble such as air leakage or difficulty in removing the tubing.

Other Tubing Brands

⚠ Caution

1. When using other than SMC brand tubing, confirm that the following specifications are satisfied with respect to the outside diameter tolerance of the tubing.

- | | |
|------------------------|-------------------------------------|
| 1) Nylon tubing | within ±0.1 mm |
| 2) Soft nylon tubing | within ±0.1 mm |
| 3) Polyurethane tubing | within +0.15 mm, within -0.2 mm. |

Do not use tubing which do not meet these outside diameter tolerances. It may not be possible to connect them, or they may cause other trouble, such as air leakage or the tubing pulling out after connection.

M8 Connector

⚠ Caution

1. M8 connector types have an IP65 (enclosure) rating, offering protection from dust and water. However please note: these products are not intended for use in water. Select a SMC connector cable (V100-49-1-□) or a FA sensor type connector, with M8 threaded 3 pin specifications conforming to Nippon Electric Control Equipment Association Standard, NECA4202 (IEC60947-5-2). Make sure the connector O.D. is 10.5mm or less when used with the SY3000 series manifold. If more than 10.5mm, it cannot be mounted due to the size.
2. Do not use a tool to mount the connector, as this may cause damage. Only tighten by hand. (0.4 to 0.6 N·m)
3. The excessive stress on the cable connector will not be able to satisfy the IP65 rating. Please use caution and do not apply a stress of 30 N or greater.

⚠ Caution

Failure to meet IP65 performance may result if using alternative connectors than those shown above, or when insufficiently tightened.

Connector cable mounting



Note) Connector cable should be mounted in the correct direction.

Make sure that the arrow symbol on the connector is facing the triangle symbol on the valve when using SMC connector cable (V100-49-1-□).

Be careful not to squeeze it in the wrong direction, as problems such as pin damage may occur.

SJ

SY

SY

S0700

S0700



SY Series

Specific Product Precautions 8

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

M8 Connector

⚠ Caution

■ Connector cable

- Connector cable for M8 can be ordered as follows:
- Refer to page 637 for the surge voltage suppressor.

How to Order

1. To order solenoid valve and connector cable at the same time.
(Connector cable will be included in the shipment of the solenoid valve.)

SY ³/₅/₉ □ □ □ □ - □ W □ 1 - □ □

IEC Standards compliant

| | |
|-----|----------------------|
| Nil | None |
| A | IEC60947-2 compliant |

Cable length (mm)


| Symbol | Cable length (mm) |
|--------|-------------------|
| 1 | 300 |
| 2 | 500 |
| 3 | 1000 |
| 4 | 2000 |
| 5 | 3000 |
| 6 | 4000 |
| 7 | 5000 |

Ex. 1) Cable length: 300mm

SY312-5W1ZE-C4


Symbol for electrical entry

2. To order connector cable only

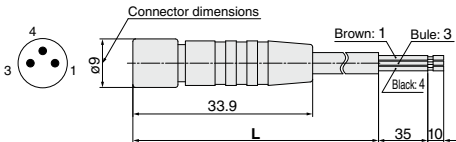

| Cable length (L) | Part no. |
|------------------|-------------|
| 300 mm | V100-49-1-1 |
| 500 mm | V100-49-1-2 |
| 1000 mm | V100-49-1-3 |
| 2000 mm | V100-49-1-4 |
| 5000 mm | V100-49-1-7 |
| 3000 mm | V100-49-1-5 |
| 4000 mm | V100-49-1-6 |

[Dimensions when installed]



Solenoid Valve Mounting

⚠ Caution

Mount it so that there is no slippage or deformation in gaskets, and tighten with the tightening torque as shown below.


| Model | Thread size | Tightening torque |
|--------|-------------|-------------------|
| SY3000 | M2 | 0.16 N·m |
| SY5000 | M3 | 0.8 N·m |
| SY7000 | M4 | 1.4 N·m |
| SY9000 | M3 | 0.8 N·m |

Replacement of Pilot Valve


⚠ Caution

Pilot valves in this series are improved to provide excellent energy saving results. However following this improvement, these new valves are no longer compatible with the current pilot valve used at the interface. Consult with SMC when you need to exchange these pilot valves, in the case of manual override (marked in orange) of the adapter plate.

New type



Current type





SY Series

Specific Product Precautions 9

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Interface Regulator

⚠ Caution

Specifications

| Interface regulator model | ARBY3000-□-P-2 | ARBY3000-□-A1_B1-2 | ARBY5000-□-P-2 | ARBY5000-□-A1_B1-2 | ARBY7000-□-P-2 | ARBY7000-□-A1_B1-2 |
|---|----------------------|--------------------|----------------------|--------------------|-----------------------|--------------------|
| Applicable solenoid valve model | SY3□40(R) | | SY5□40(R) | | SY7□40(R) | |
| Regulated port | P | A B | P | A B | P | A B |
| Set pressure range | 0.1 to 0.7 MPa | | | | | |
| Maximum operating pressure | 0.7 MPa | | | | | |
| Fluid | Air | | | | | |
| Ambient and fluid temperature | Max. 50°C | | | | | |
| Connection port of pressure gauge | M5 x 0.8 | | | | | |
| Weight W (g) | With pressure gauge | | | | 110.8 g | |
| | With plug | | | | 103.2 g | |
| Supply side effective area ¹⁾ | 46 g (05), 50 g (06) | | | | 110.8 g | |
| Exhaust side effective area ²⁾ | 20 g | | | | 103.2 g | |
| Supply side effective area ³⁾ | P→A,B | | | | 13.54 mm ² | |
| Exhaust side effective area ³⁾ | A,B→EA,EB | | | | 15.71 mm ² | |
| | 4.05 mm ² | | 3.91 mm ² | | 11.1 mm ² | |
| | | | 66.8 g | | 7.61 mm ² | |
| | | | 60.4 g | | 10.1 mm ² | |
| | | | | | 15.71 mm ² | |
| | | | | | 15.71 mm ² | |


Note 1) Pressurize the interface regulator from P port on the base.

Note 2) With closed center and pressure center valves, the pressure can be regulated through P port only.




Note 3) Effective area, excluding the regulated port, when a primary pressure of 0.5 MPa is supplied with regulators mounted on the solenoid valves (2 positions) and a sub-plate. Refer to "Flow Rate Characteristics" regarding the regulated port.

Note 4) Valves for weight include gasket and mounting screws.

Note 5) With A, B ports regulated (P port controlled, A, B ports regulated), the effective area (Cv factor) for the regulated port and unregulated passage (P to B or P to A) decreases as shown in the graph below when the set pressure is 0.25 MPa or less.




Symbol



How to Order Interface Regulator

ARBY3000 - 05 - P - 2



- Regulated port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled, A port regulated) |
| B1 | B port (P controlled, B port regulated) |
- Pressure gauge connection port

| | |
|----|---|
| 05 | Pressure gauge (G15-10-01) [for odd number stations] |
| 06 | Pressure gauge (G15-10-01) [for even number stations] |
| M1 | Plug (M-5P) |

Note) For the ARBY3000 series with pressure gauge, note that the part numbers for odd number and even number stations differ to prevent interference between the pressure gauges when installing on the manifold.

ARBY5000 - 00 - P - 2




- Regulated port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled, A port regulated) |
| B1 | B port (P controlled, B port regulated) |
- Pressure gauge connection port

| | |
|----|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |

ARBY7000 - 00 - P - 2



- Regulated port

| | |
|----|---|
| P | P port |
| A1 | A port (P controlled, A port regulated) |
| B1 | B port (P controlled, B port regulated) |
- Pressure gauge connection port

| | |
|----|----------------------------|
| 00 | Pressure gauge (G15-10-01) |
| M1 | Plug (M-5P) |

Note) The M8 connector for wiring cannot be mounted for the ARBY3000 series.



SY Series

Specific Product Precautions 10

Be sure to read this before handling the products.


Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Flow Rate Characteristics

(Conditions: Inlet pressure 0.7 MPa when 2 position solenoid valve is mounted.)


ARBY3000

P port regulated (P→A, B)




A1 port regulated (P→A),

B1 port regulated (P→B)




ARBY5000

P port regulated (P→A, B)




A1 port regulated (P→A),

B1 port regulated (P→B)




ARBY7000

P port regulated (P→A, B)



A1 port regulated (P→A),

B1 port regulated (P→B)



■Trademark

DeviceNet™ is a trademark of ODVA.

Model Index (Alphanumerical Order)

| | | |
|--------------------|---|---------------|
| SS5Y3-20 | SY Type 20 Body Ported Manifold: Bar Stock Type/Individual Wiring | P. 438 |
| SS5Y3-20P | SY Type 20P Body Ported Manifold: Bar Stock Type/Flat Ribbon Cable | P. 448 |
| SS5Y3-20SA | SY EX510 Gateway-type Body Ported Manifold/Bar Stock Type | P. 458 |
| SS5Y3-41 | SY Type 41 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 490 |
| SS5Y3-41P | SY Type 41P Base Mounted Manifold: Bar Stock Type/Flat Ribbon Cable | P. 506 |
| SS5Y3-42 | SY Type 42 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 490 |
| SS5Y3-42P | SY Type 42P Base Mounted Manifold: Bar Stock Type/Flat Ribbon Cable | P. 506 |
| SS5Y3-42SA | SY EX510 Gateway-type Base Mounted Manifold/Bar Stock Type | P. 520 |
| SS5Y3-45 | SY Type 45 Base Mounted Manifold: Stacking Type/DIN Rail/Individual Wiring | P. 536 |
| SS5Y3-45-□ | SY Type 45-□ Base Mounted Manifold: Stacking Type/DIN Rail/Connector Box | P. 548 |
| SS5Y3-45F | SY Type 45F Base Mounted Manifold: D-sub Connector, 25 Pins | P. 564 |
| SS5Y3-45P | SY Type 45P Base Mounted Manifold: Flat Ribbon Cable | P. 565 |
| SS5Y3-45S | SY EX122 Integrated-type (For output) Base Mounted Manifold | P. 594 |
| SS5Y3-45S1 | SY EX121 Separate Type (For output) Base Mounted Manifold | P. 597 |
| SS5Y3-45S6A | SY EX510 Gateway-type Base Mounted Manifold: Stacking Type | P. 556 |
| SS5Y3-45S6B | SY EX510 Gateway-type Base Mounted Manifold/Stacking Type/Plug-in | P. 604 |
| SS5Y3-45T | SY Type 45T Base Mounted Manifold: 9 Pins Terminal Block | P. 565 |
| SS5Y3-45T1 | SY Type 45T1 Base Mounted Manifold: 18 Pins Terminal Block | P. 565 |
| SS5Y3-60 | SY Type 60 Body Ported Manifold: Cassette Type | P. 472 |
| SS5Y5-20 | SY Type 20 Body Ported Manifold: Bar Stock Type/Individual Wiring | P. 438 |
| SS5Y5-20P | SY Type 20P Body Ported Manifold: Bar Stock Type/Flat Ribbon Cable | P. 448 |
| SS5Y5-20SA | SY EX510 Gateway-type Body Ported Manifold/Bar Stock Type | P. 458 |
| SS5Y5-41 | SY Type 41 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 490 |
| SS5Y5-41P | SY Type 41P Base Mounted Manifold: Bar Stock Type/Flat Ribbon Cable | P. 506 |
| SS5Y5-42 | SY Type 42 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 490 |
| SS5Y5-42P | SY Type 42 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 506 |
| SS5Y5-42SA | SY EX510 Gateway-type Base Mounted Manifold/Bar Stock Type | P. 520 |
| SS5Y5-45 | SY Type 45 Base Mounted Manifold: Stacking Type/DIN Rail/Individual Wiring | P. 536 |
| SS5Y5-45-□ | SY Type 45-□ Base Mounted Manifold: Stacking Type/DIN Rail/Connector Box | P. 548 |
| SS5Y5-45F | SY Type 45F Base Mounted Manifold: D-sub Connector, 25 Pins | P. 564 |
| SS5Y5-45P | SY Type 45P Base Mounted Manifold: Flat Ribbon Cable | P. 565 |
| SS5Y5-45S | SY EX122 Integrated-type (For output) Base Mounted Manifold | P. 594 |
| SS5Y5-45S1 | SY EX121 Separate Type (For output) Base Mounted Manifold | P. 597 |
| SS5Y5-45S6A | SY EX510 Gateway-type Base Mounted Manifold: Stacking Type | P. 556 |
| SS5Y5-45S6B | SY EX510 Gateway-type Base Mounted Manifold/Stacking Type/Plug-in | P. 604 |
| SS5Y5-45T | SY Type 45T Base Mounted Manifold: 9 Pins Terminal Block | P. 565 |
| SS5Y5-45T1 | SY Type 45T1 Base Mounted Manifold: 18 Pins Terminal Block | P. 565 |
| SS5Y5-60 | SY Type 60 Body Ported Manifold: Cassette Type | P. 472 |
| SS5Y7-20 | SY Type 20 Body Ported Manifold: Bar Stock Type/Individual Wiring | P. 438 |
| SS5Y7-20P | SY Type 20P Body Ported Manifold: Bar Stock Type/Flat Ribbon Cable | P. 448 |
| SS5Y7-20SA | SY EX510 Gateway-type Body Ported Manifold/Bar Stock Type | P. 458 |
| SS5Y7-42 | SY Type 42 Base Mounted Manifold: Bar Stock Type/Individual Wiring | P. 490 |
| SS5Y7-42P | SY Type 42P Base Mounted Manifold: Bar Stock Type/Flat Ribbon Cable | P. 506 |
| SS5Y7-42SA | SY EX510 Gateway-type Base Mounted Manifold/Bar Stock Type | P. 520 |
| SS5Y7-60 | SY Type 60 Body Ported Manifold: Cassette Type | P. 472 |
| SS5Y9-23 | SY Type 23 Body Ported Manifold: Stacking Type/Individual Wiring | P. 444 |

| | | |
|-------------------|---|---------------|
| SS5Y9-23P | SY Type 23P Body Ported Manifold: Stacking Type/Flat Ribbon Cable | P. 454 |
| SS5Y9-23SA | SY EX510 Gateway-type Body Ported Manifold/Stacking Type | P. 464 |
| SS5Y9-43 | SY Type 43 Base Mounted Manifold: Stacking Type/Individual Wiring | P. 500 |
| SS5Y9-43P | SY Type 43P Base Mounted Manifold: Stacking Type/Flat Ribbon Cable | P. 514 |
| SS5Y9-43SA | SY EX510 Gateway-type Base Mounted Manifold: Stacking Type | P. 525 |
| SY300 | 3 Port Valve: Mixed Mounting Type on 5 Port Valve Manifold | P. 610 |
| SY300-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY3000 | 5 Port Solenoid Valve: Body Ported/Single Unit | P. 404 |
| SY3000 | 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 420 |
| SY3000-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY3000-X20 | Made to Order Body Ported External Pilot | P. 624 |
| SY3000-X90 | Made to Order Body Ported Fluororubber for Main Valve | P. 624 |
| SY500 | 3 Port Valve: Mixed Mounting Type on 5 Port Valve Manifold | P. 610 |
| SY500-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY5000 | 5 Port Solenoid Valve: Body Ported/Single Unit | P. 404 |
| SY5000 | 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 420 |
| SY5000-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY5000-X20 | Made to Order Body Ported External Pilot | P. 624 |
| SY5000-X90 | Made to Order Body Ported Fluororubber for Main Valve | P. 624 |
| SY5A2R | Made to Order Body Ported Vacuum Release Valve with Throttle Valve | P. 625 |
| SY7000 | 5 Port Solenoid Valve: Body Ported/Single Unit | P. 404 |
| SY7000 | 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 420 |
| SY7000-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY7000-X20 | Made to Order Body Ported External Pilot | P. 624 |
| SY7000-X90 | Made to Order Body Ported Fluororubber for Main Valve | P. 624 |
| SY9000 | 5 Port Solenoid Valve: Body Ported/Single Unit | P. 404 |
| SY9000 | 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 420 |
| SY9000-WA□ | Made to Order M8 Connector Conforming to IEC60947-5-2 | P. 623 |
| SY9000-X90 | Made to Order Body Ported Fluororubber for Main Valve | P. 624 |

Others

| | | |
|------------------|--|---------------|
| 30-SY300 | UL Standard Compliant 3 Port Solenoid Valve: Body Ported/Single Unit | P. 632 |
| 30-SY300 | UL Standard Compliant 3 Port Solenoid Valve: Base Mounted/Single Unit | P. 633 |
| 30-SY3000 | UL Standard Compliant 5 Port Solenoid Valve: Body Ported/Single Unit | P. 630 |
| 30-SY3000 | UL Standard Compliant 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 631 |
| 30-SY500 | UL Standard Compliant 3 Port Solenoid Valve: Body Ported/Single Unit | P. 632 |
| 30-SY500 | UL Standard Compliant 3 Port Solenoid Valve: Base Mounted/Single Unit | P. 633 |
| 30-SY5000 | UL Standard Compliant 5 Port Solenoid Valve: Body Ported/Single Unit | P. 630 |
| 30-SY5000 | UL Standard Compliant 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 631 |
| 30-SY7000 | UL Standard Compliant 5 Port Solenoid Valve: Body Ported/Single Unit | P. 630 |
| 30-SY7000 | UL Standard Compliant 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 631 |
| 30-SY9000 | UL Standard Compliant 5 Port Solenoid Valve: Body Ported/Single Unit | P. 630 |
| 30-SY9000 | UL Standard Compliant 5 Port Solenoid Valve: Base Mounted/Single Unit | P. 631 |

SJ

SY

SY

S0700

S0700